

# Detector requirements for future strong field QED experiments

T. Koffas (Carleton), S. Meuren (Princeton),  
D. Reis (Stanford), M. Wing (UCL/DESY)

- Introduction
- Initial beam parameters
- Properties of final-state photons, electrons and positrons

# Introduction

When thinking about the detector session and also trying to get detector experts involved.

Needed to give information on the requirements:


- What do we want to measure ?
- What is the rate ?
- Are there different experimental configurations ?
- Etc.

14:00	<b>Introduction on parameters and requirements</b> <i>DESY</i>	<i>Matthew WING</i> 13:35 - 13:45
	<b>Semi-conductor detectors</b> <i>DESY</i>	<i>Chris KENNEY</i> 13:50 - 14:05
	<b>Calorimeters for strong-field QED experiments</b> <i>DESY</i>	<i>Prof. Halina ABRAMOWICZ et al.</i> 14:10 - 14:25
15:00	<b>The ILC polarimeter and cerenkov detectors</b> <i>DESY</i>	<i>Dr. Jenny LIST</i> 14:30 - 14:45
	<b>Laser-wakefield experiments</b> <i>DESY</i>	<i>Gianluca SARRI</i> 14:50 - 15:05
	<b>Discussion</b> <i>DESY</i>	<i>Thomas KOFFAS et al.</i> 15:10 - 15:40

We came up with some ideas, based on a set of initial parameters and assuming something like an E144 set-up.

This encompasses plans for LUXE and SLAC (LCLS/FACET-II) and elsewhere.

# Generic E144-like electron-laser experiment

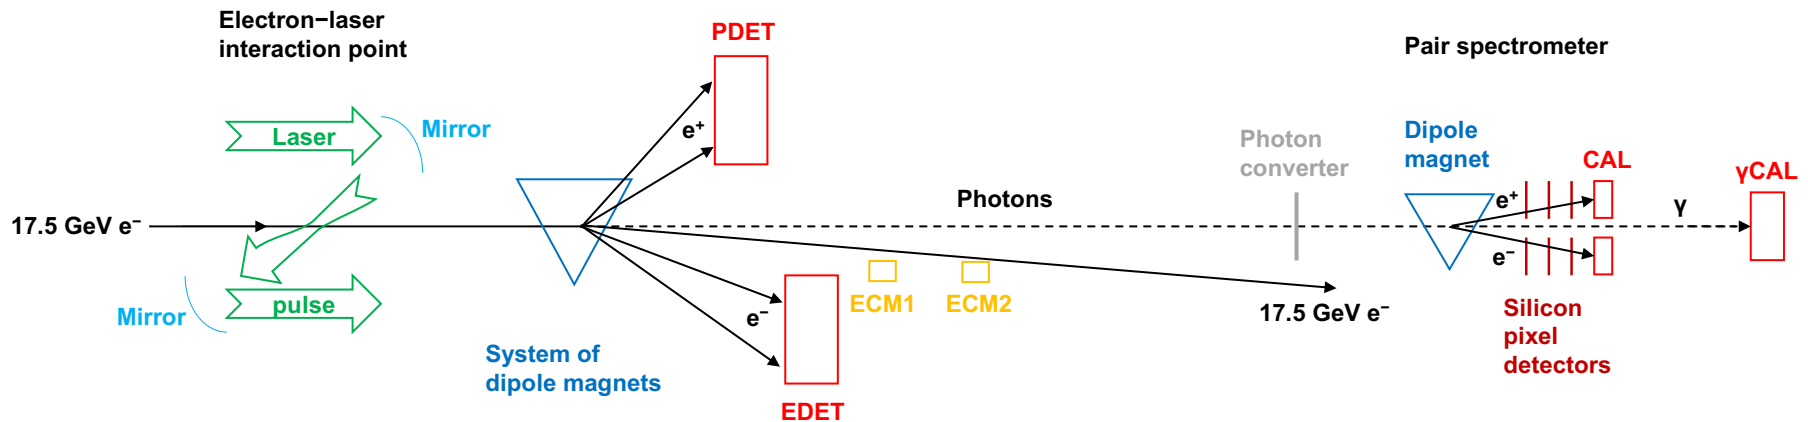

- We have electron-laser (i.e.  $e\gamma$ ) and also  $\gamma\gamma$  interactions.
- We want to measure final-state electrons, positrons and photons.

# Initial electron beam

Initial electron bunches are assumed to be like those found at EU.XFEL (LUXE) and SLAC (LCLS/FACET-II):

- an electron energy,  $5 < E_e < 20 \text{ GeV}$ ;
- a bunch charge of  $N_e = 10^8 - 10^{10}$  electrons;
- a bunch length of  $\sigma_z \sim \text{few} - 100 \mu\text{m}$ ;
- the repetition rate will be dictated by the laser frequency;
- a beam size of  $\sigma_{x,y} \sim \text{few} - 50 \mu\text{m}$ , although maybe this is not so relevant for the detector requirements.

# Initial laser beam

- a  $\sim 100$  TW [ $\sim 1$  PW] laser system, e.g.  $\sim 2.5$  J [ $\sim 25$  J] in  $\sim 25$  fs;
- a typical focal area of  $(10\text{ }\mu\text{m})^2$ , implying an intensity of  $10^{20}\text{ W cm}^{-2}$  [ $10^{21}\text{ W cm}^{-2}$ ];
- the laser is most likely a Ti:sapphire system (800 nm central wavelength, i.e. typical photon energy: 1.55 eV);
- this implies a reduced vector potential of  $a_0 = \xi \approx 5$  [ $a_0 = \xi \approx 15$ ] and a quantum parameter of  $\chi = \Upsilon \approx 0.6$  [ $\chi = \Upsilon \approx 1.8$ ] for head-on collisions with a 10 GeV electron/photon<sup>1</sup> ;
- the repetition rate will be in the range 0.1 – 10 Hz;
- the laser is linearly polarised (full control of the polarisation, i.e. linear over elliptical to circular possible), thus there is the possibility of producing polarised photons and electrons and positrons;
- near backscattering with electron and/or gamma beam;
- some level of frequency conversion and longitudinal pulse shaping will be available at reduced intensities.

# Final-state photons

At E144, up to  $10^7$  photons were produced. For future experiments, the initial  $e^-$  beam is similar, but we expect much increased laser intensities. We expect:

- up to  $\sim 10^{11}$  photons, i.e. up to 10 photons per incident electron;
- the transverse size of the photon bunch at the interaction point will be about  $10\text{ }\mu\text{m}$ , i.e.  $< \text{mm}$  for  $\mathcal{O}(10\text{ m})$  downstream (can change with different emittance of electron beam);
- typical energy will be  $1 - 10\text{ GeV}$ .

We want to measure the number of photons and the energy spectrum.

- However, when there is no chance of measuring individual photons, we will need to measure the integrated signal.
- Alternatively, could e.g. reduce number of initial electrons and so produce fewer photons.
- Is a system with a foil to convert the photons to an electron–positron pair useful ?

# Final-state electrons

We expect three types of electrons:

- a. electrons which have not (or only minimally) radiated
- b. electrons which have radiated a hard photon
- c. electrons produced via  $\gamma \rightarrow e^+ e^-$

Those from b. and c. have a transverse momentum of  $\sim 5$  MeV along the laser polarisation direction and  $\sim 0.5$  MeV along the orthogonal direction.

In  $e\gamma$  collisions, we expect:

- $\sim 10^{10}$  electrons, i.e. one electron per incident electron;
- the electrons will be separated from the positrons and will also have some spread due a magnetic spectrometer;
- typical energy will be 1 – 10 GeV.

# Final-state electrons

Some issues/questions:

- Provides a cross-check of the photon signal (and vice-versa).
- Could we use the same type of detector for electrons and photons ?
- Would this be a calorimeter or (silicon) trackers or a combination of both ?
- To what extent does a magnetic spectrometer simplify the system ?
- We want to distinguish electrons in pair production from those in Compton scattering.



# Final-state positrons

The number of  $e^+e^-$  pairs depends strongly on the input parameters. We expect:

- $1 - 10^9$  positrons, i.e. up to 0.1 electron-positron pair per incident electron;
- the positrons will be separated from the electrons and will also have some spread due a magnetic spectrometer;
- typical energy will be  $1 - 10$  GeV.

We could have a low number of pairs where we measure  $e^+$  and  $e^-$  separately and correlate them. Then at higher rates, we would need to sum as for electrons and photons in  $e\gamma$  collisions.

- Can we have a detector that can do both ?
- What resolution is required to associate pairs ?
- Is timing important ?