

LUXE Participation in FCAL Beam Test

Oleksandr Borysov

DESY, September 23, 2019



Bremsstrahlung production: Geant4 vs PDG formula

PDG recommended formula for thin targets for bremsstrahlung production:

$$\omega_i \frac{dN_\gamma}{d\omega_i} \approx \left[\frac{4}{3} - \frac{4}{3} \left(\frac{\omega_i}{E_e} \right) + \left(\frac{\omega_i}{E_e} \right)^2 \right] \frac{X}{X_0}$$

It is used to calculate integral on slide 3 to get the pair production rate.

- The formula does not take into account angular distribution of bremsstrahlung photons
- Geant4 simulation:
 - accounts for laser beam transverse size
 - and thick targets to optimize the photon flux.

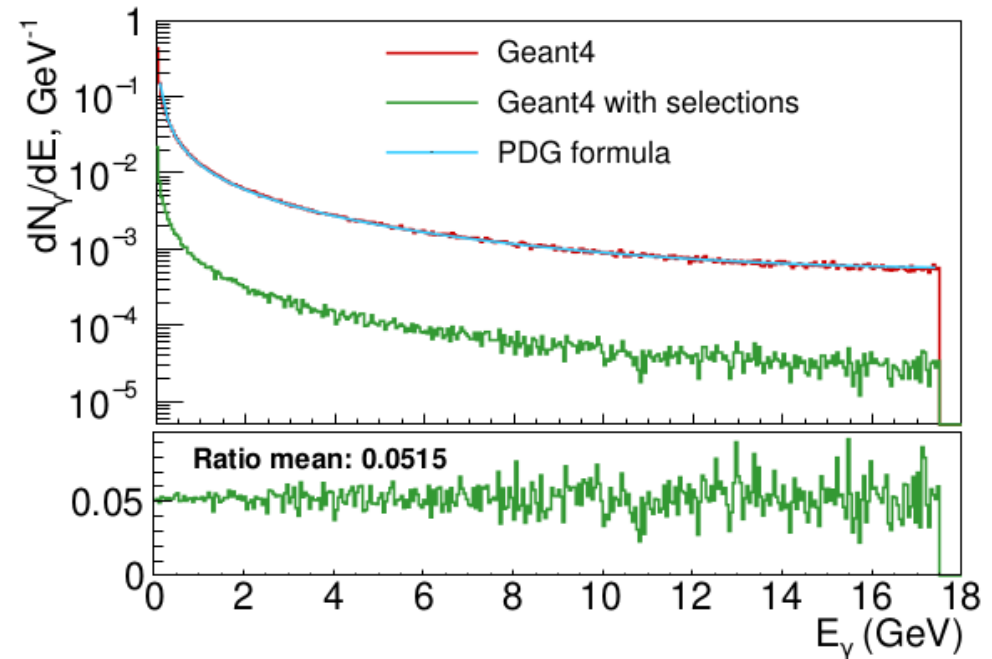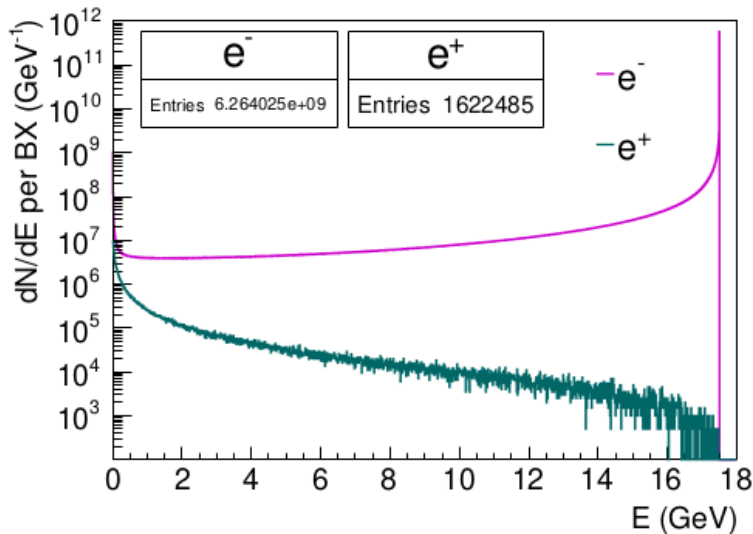

- Gaussian beam;
- Tungsten target 1%X₀ (35um), 2m from IP;
- 10M electrons
- Two histograms are compared:
 - $|x| < 1\text{mm}$ and $|y| < 1\text{mm}$;
 - $|x| < 25\text{um}$ and $|y| < 25\text{um}$.


Geant4 simulation with different target thickness and different physics lists

- Gaussian beam, focused on IP;
- Tungsten target 1%X0 (35um) thickness
- 5 m from IP;
- 6.25 M electrons (BX/1000);
- Production cut: 1 μm .


Number of photons inside
 $|x| < 25\mu\text{m}$ and
 $|y| < 25\mu\text{m}$;

Ny	4.91E+06
Ny, E > 7GeV	4.66E+05


Different target thickness

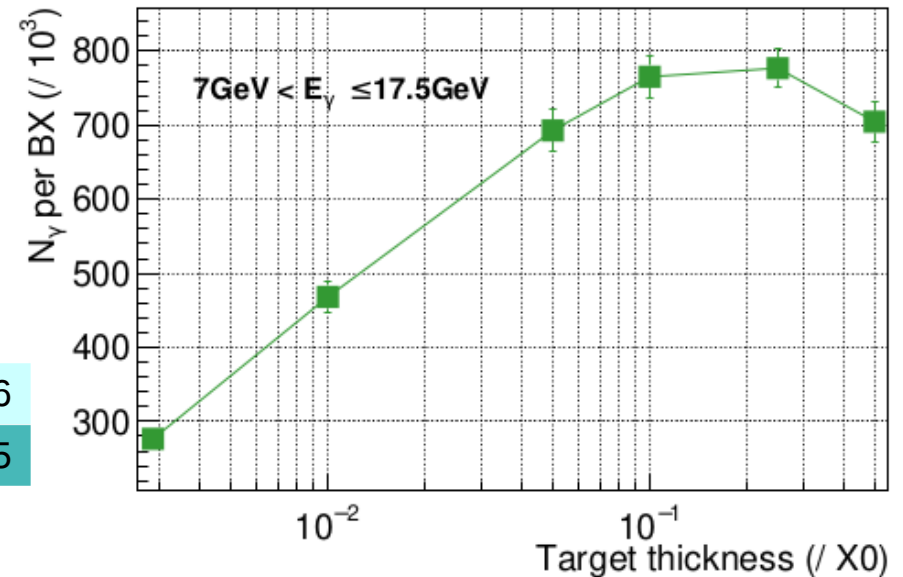



Different physics lists

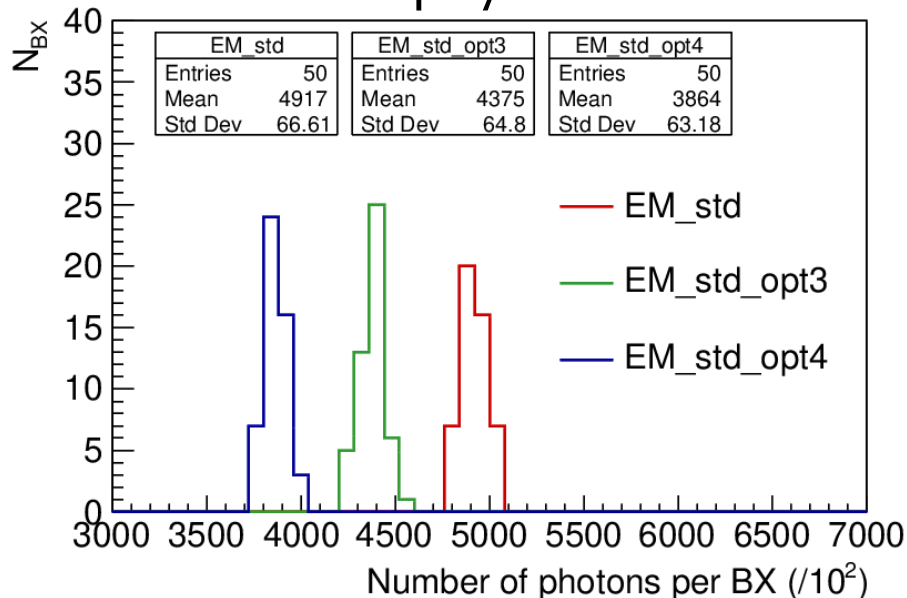

Position distribution

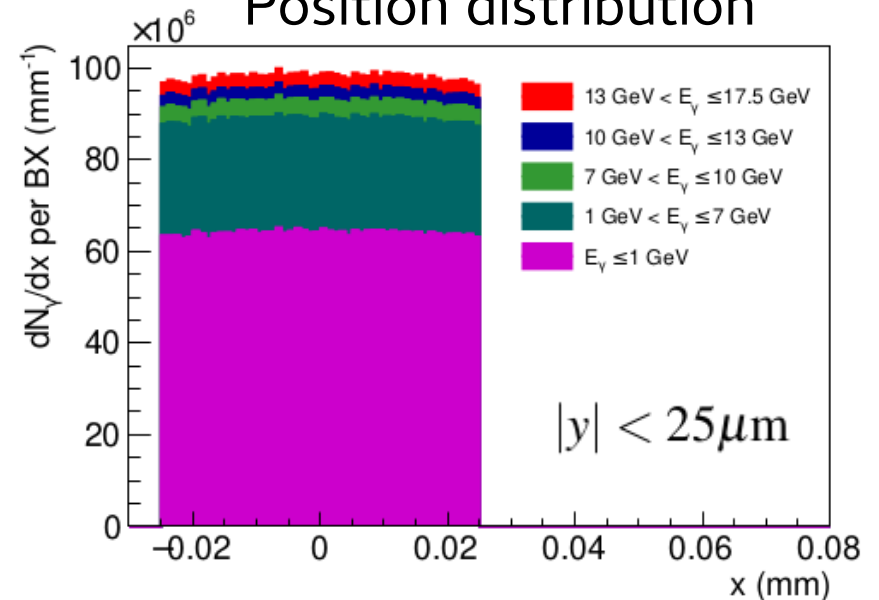


γ angular distribution for different physics lists

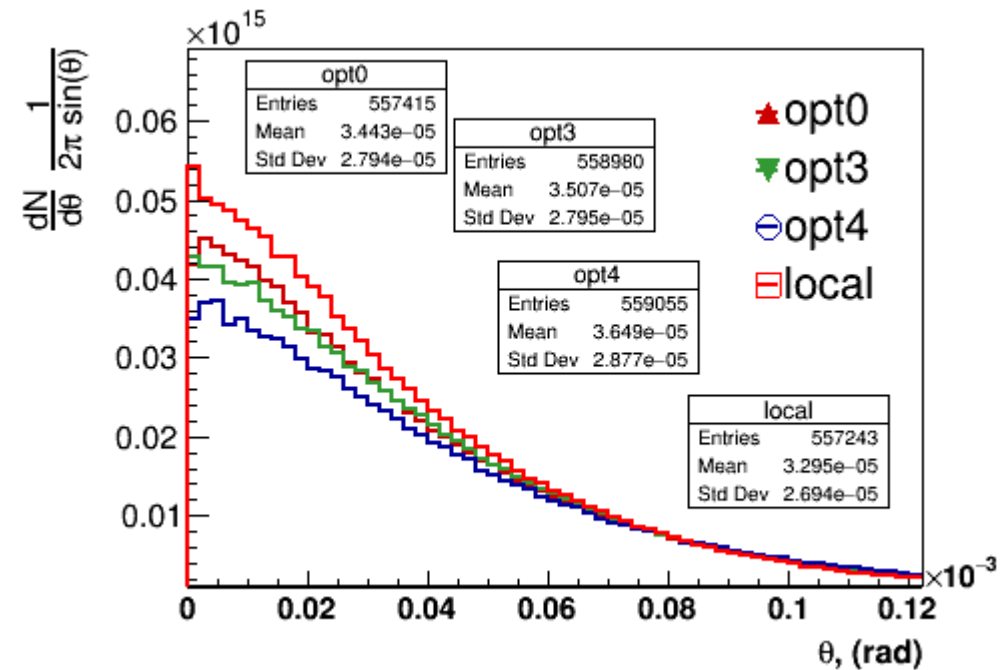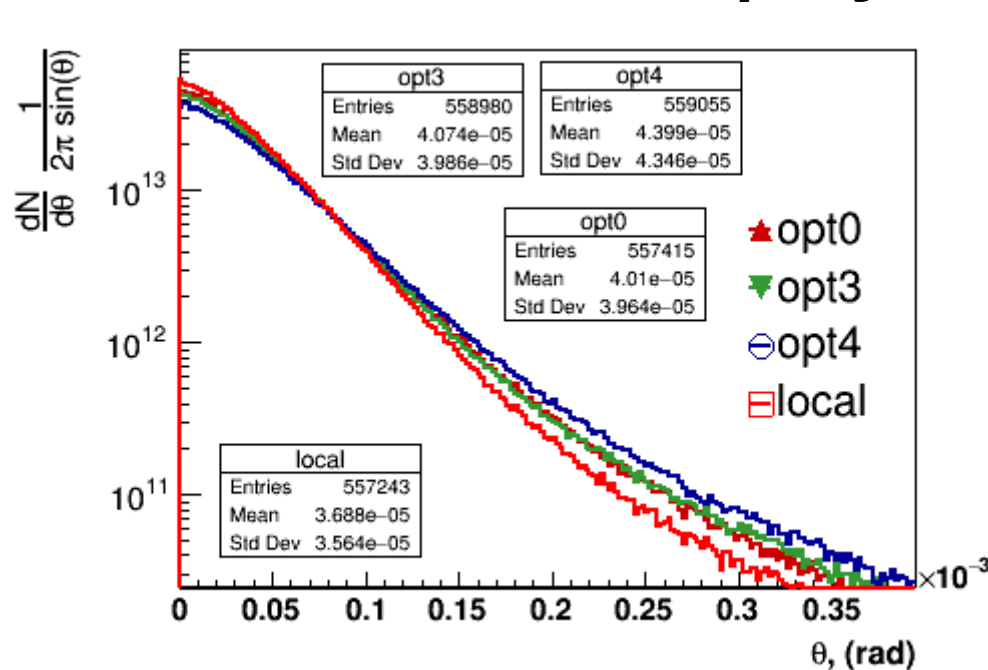


- Angular distribution is the widest for option_4 physics list and the narrowest for the local one.
- Angular distribution explains bottom right plot on previous slide.
- Total number of photons in forward region is identical for all physics lists.



Number of photons inside
 $|x| < 1.5$ m and
 $|y| < 1.5$ m

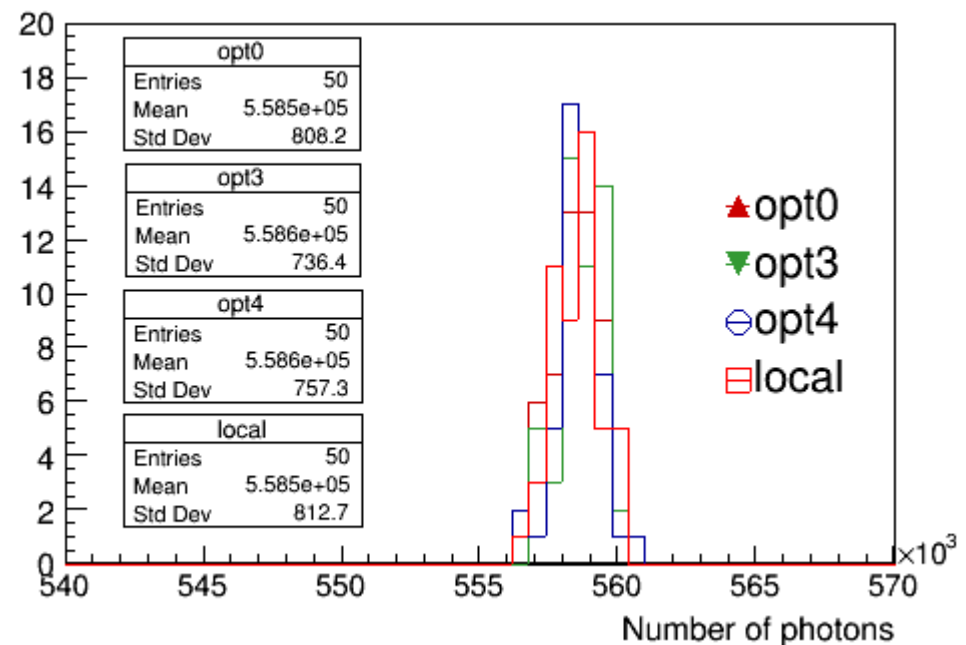

Polar angle distribution and spectra

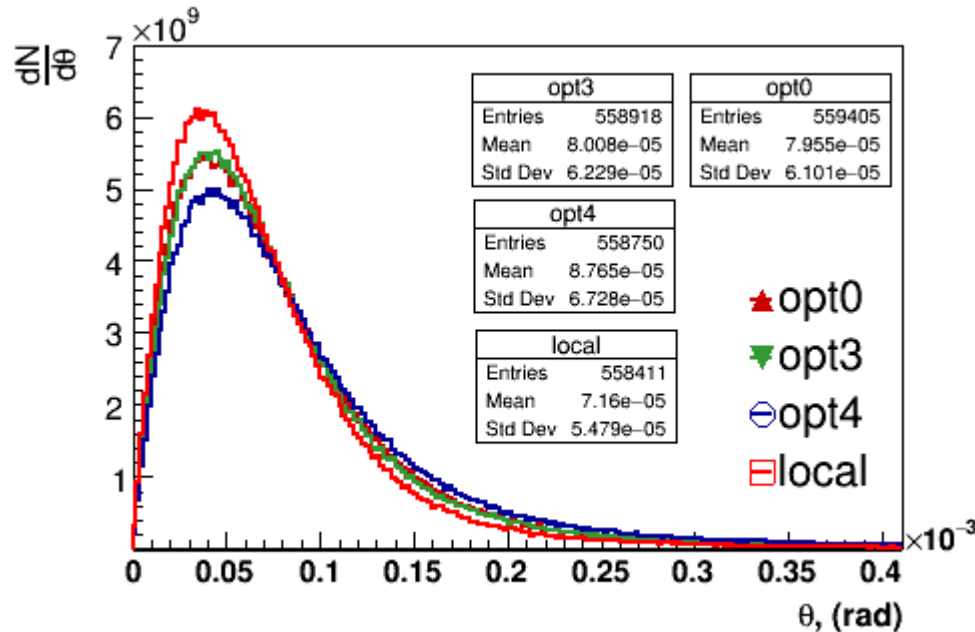


Unidirectional beam:
 $x=y=p_x=p_y=0$



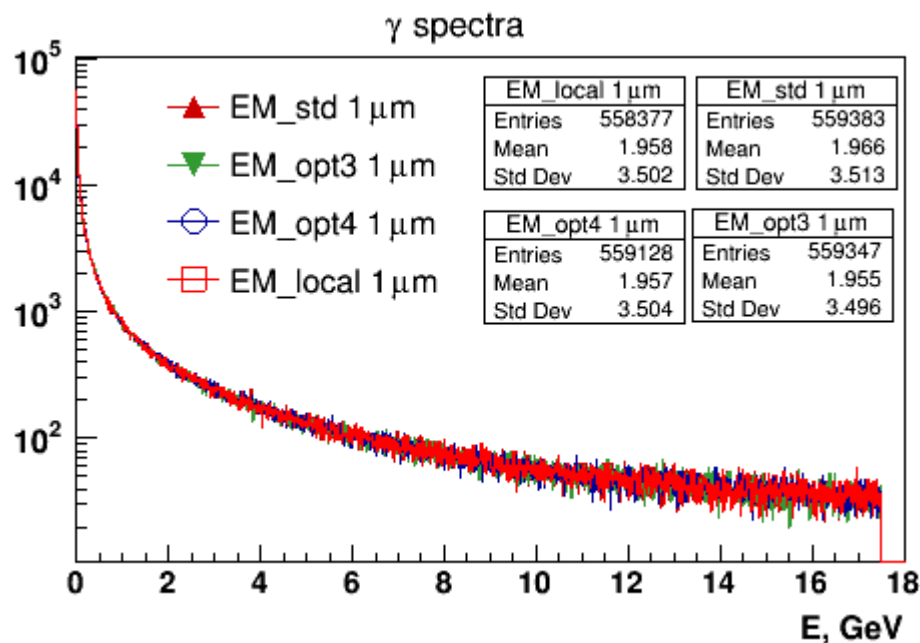
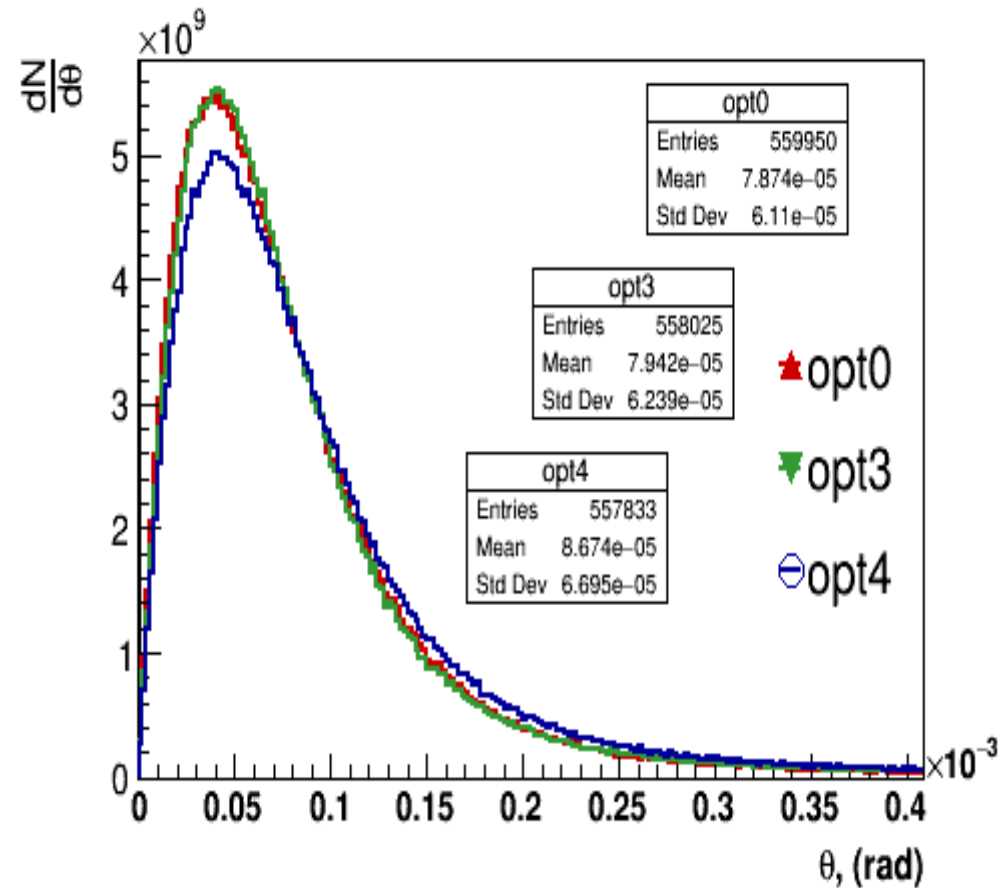


W, 17.5 GeV. Photons

- Beam, $x=y=p_x=p_y=0$;
- Tungsten target 1%X0 (35 μ m) thickness
- 2 m from IP;
- Production cut: 1 μ m.

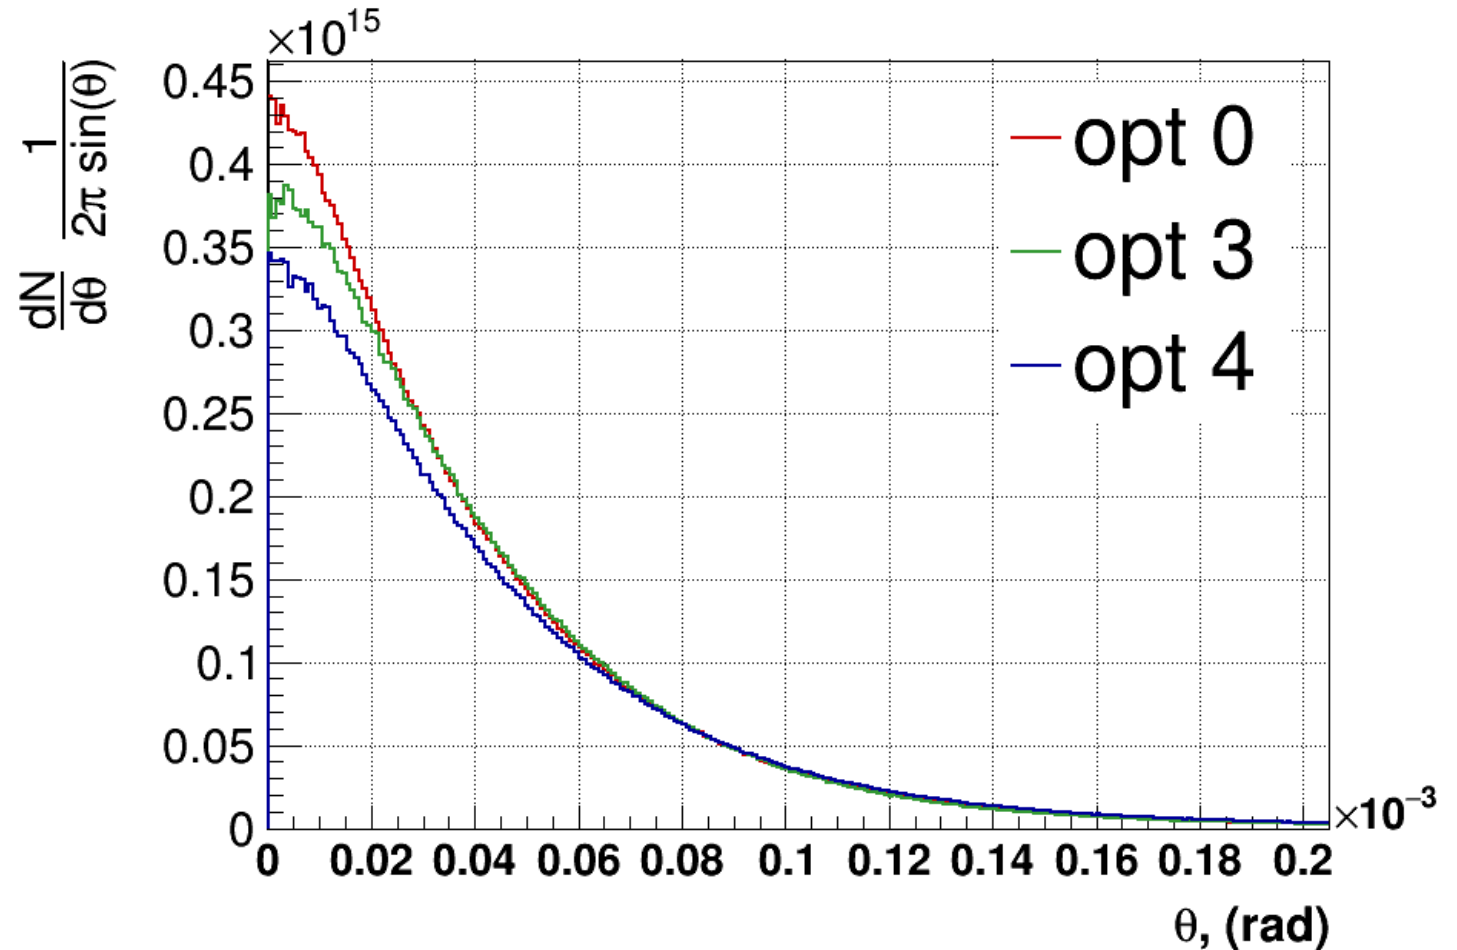


Copper targets 1 mm and 2.5 mm. Photons

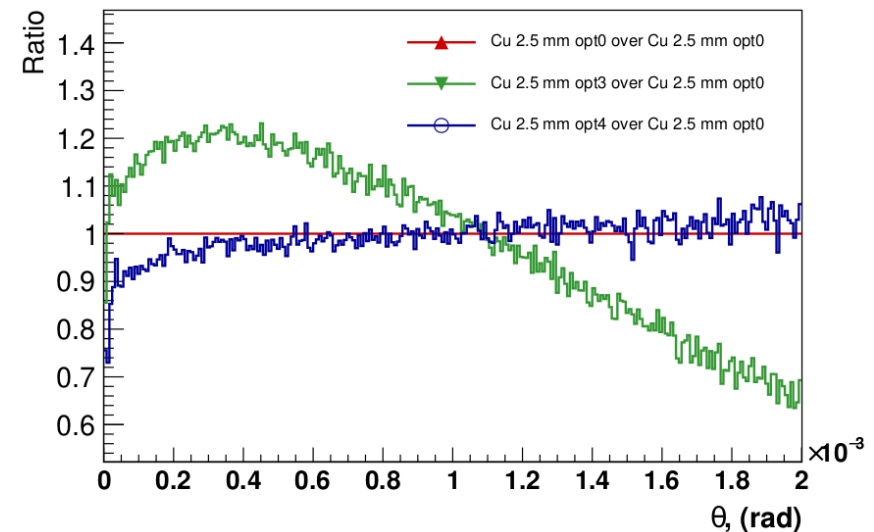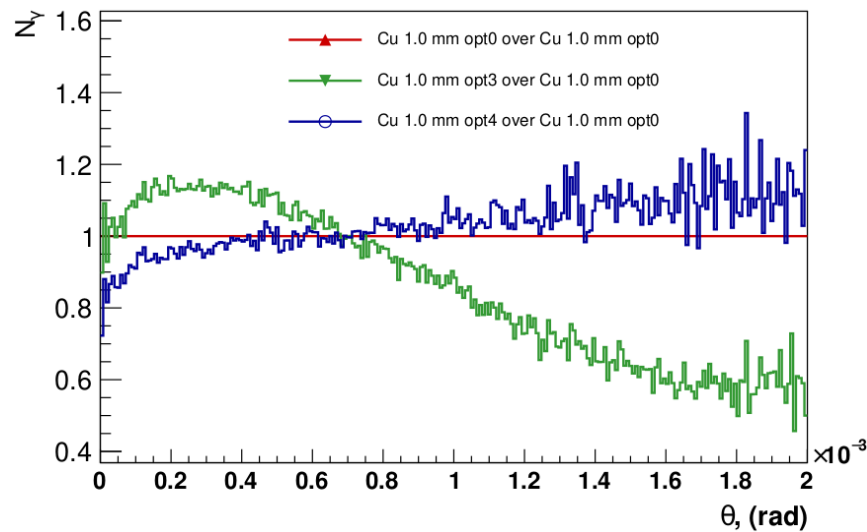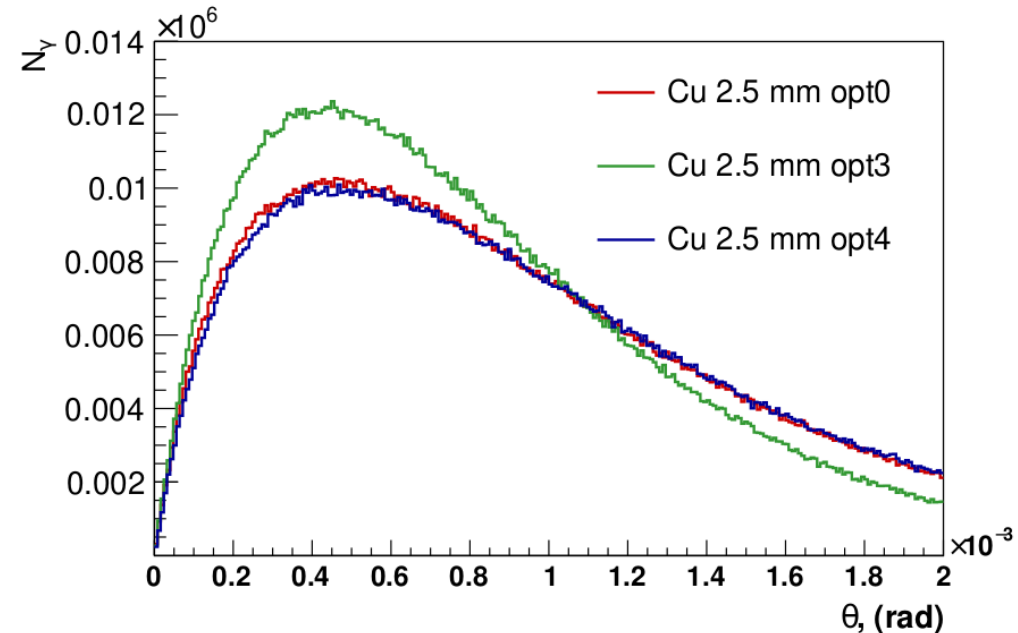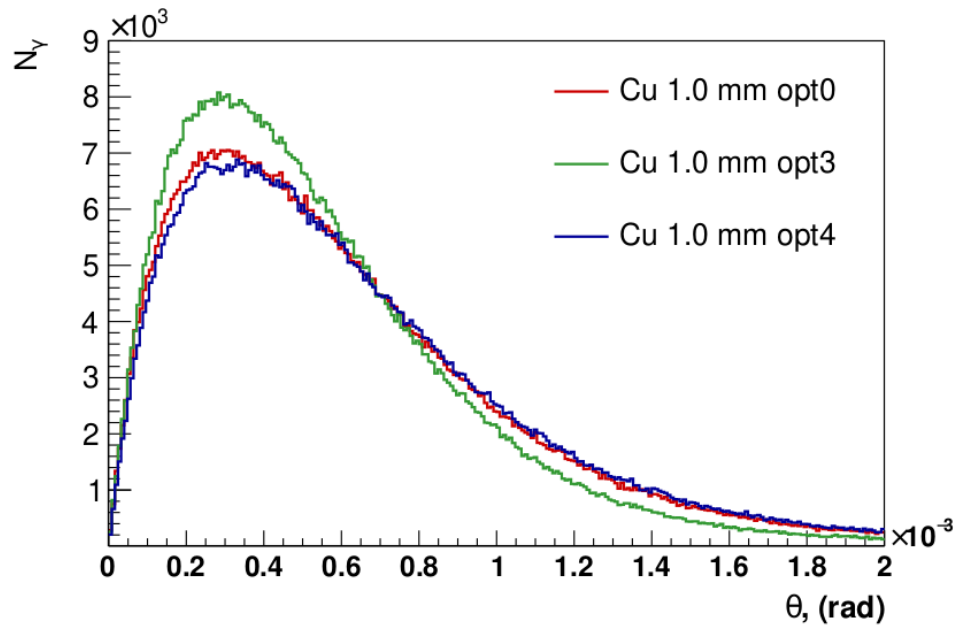


$$\frac{\int_0^{\theta_0} N(\theta) d\theta}{\int_{\theta_0}^{1.8 \times 10^{-3}} N(\theta) d\theta}$$

Copper 2.5 mm, Electrons 5 GeV

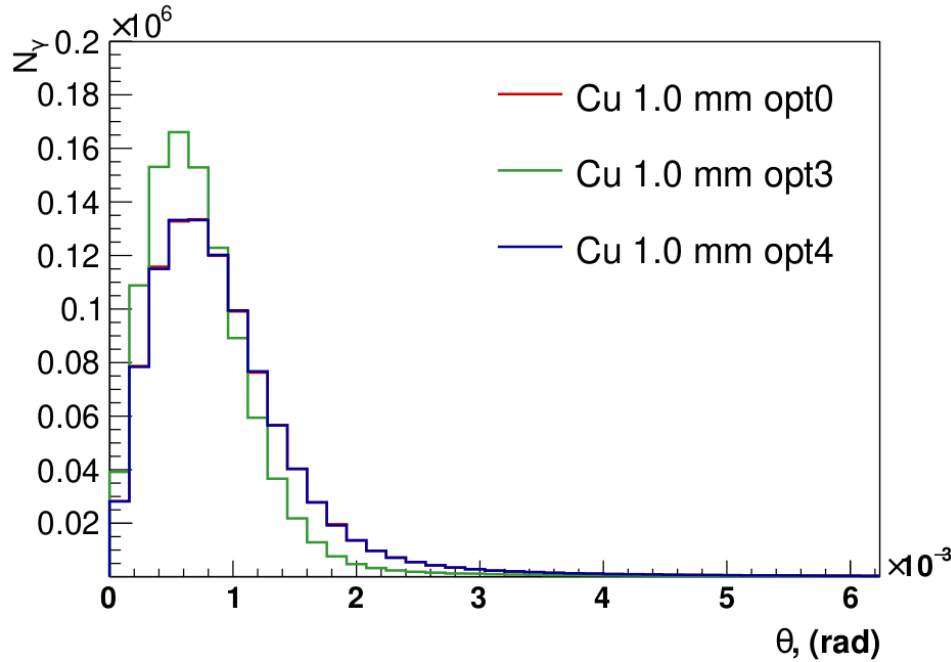


Ratio: 0.39941
Ratio: 0.195003
Ratio: 0.399752

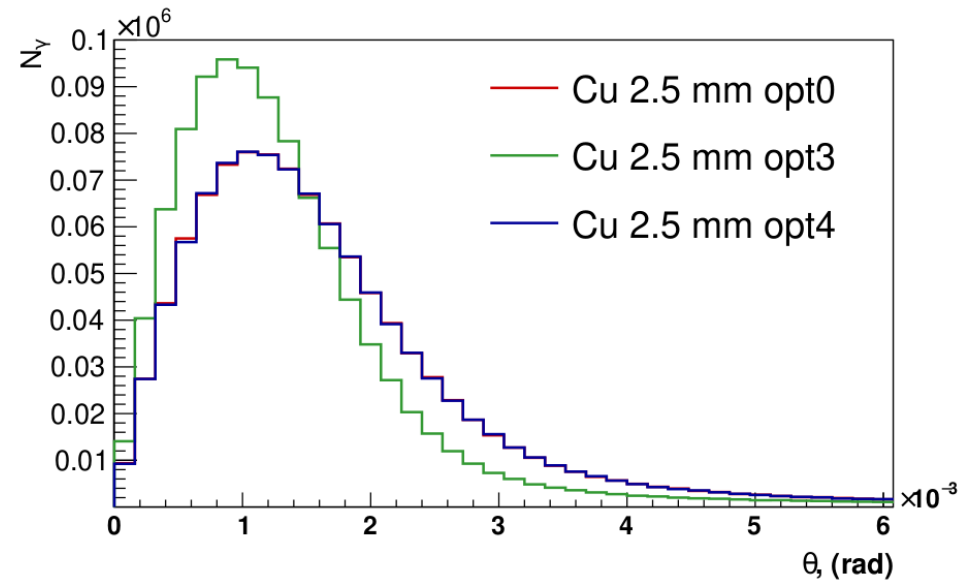



Ratio: 0.692759
Ratio: 0.37029
Ratio: 0.693171

$$\frac{\int_0^{\theta_0} N(\theta) d\theta}{1.8 \times 10^{-3} \int_{\theta_0} N(\theta) d\theta}$$

TB Magnet

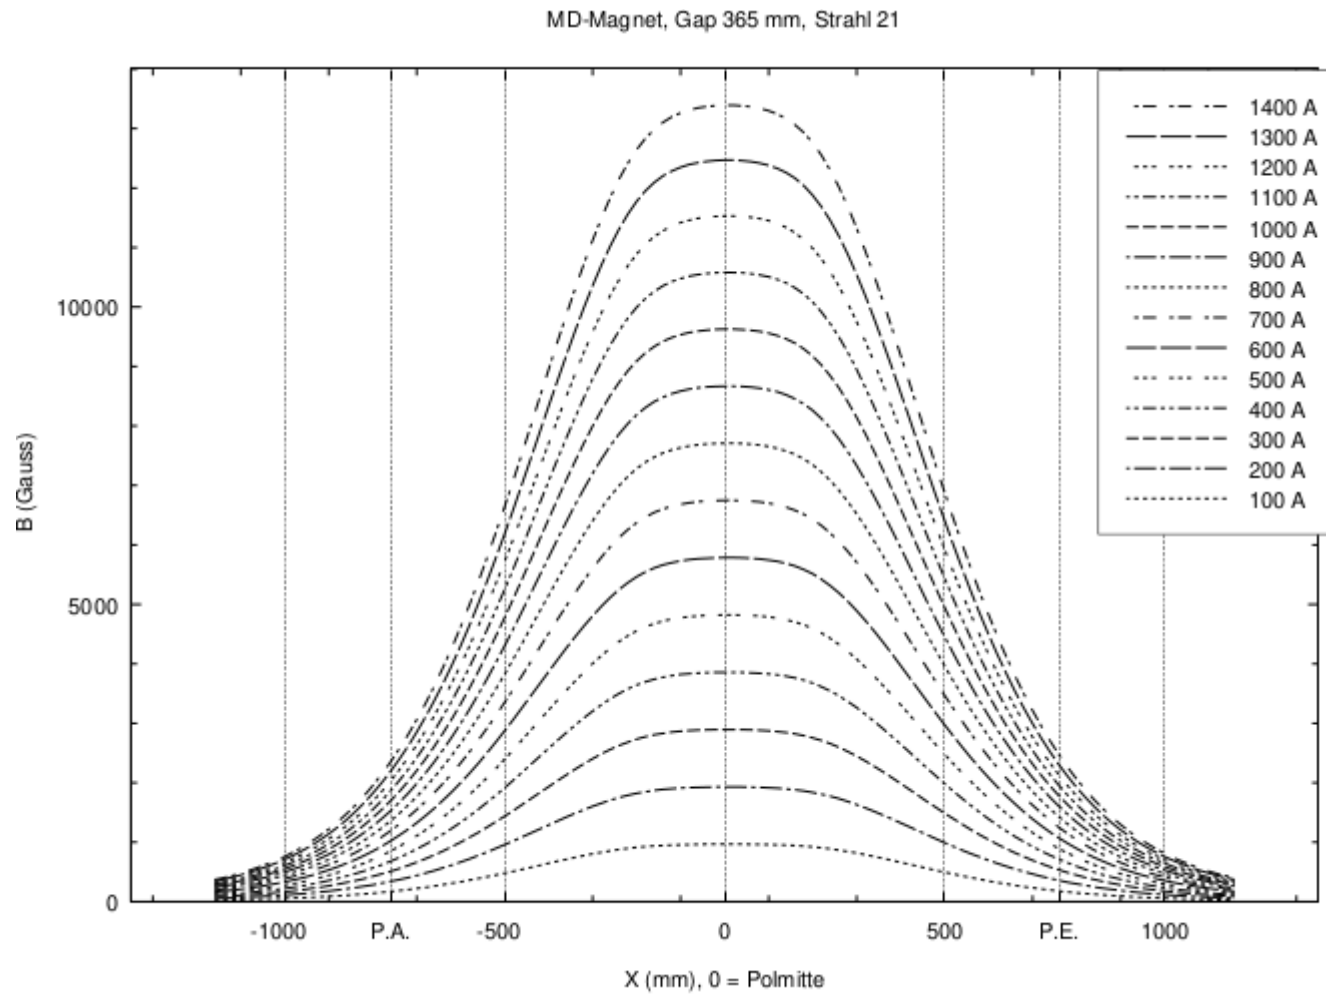

TB Magnet Drawing

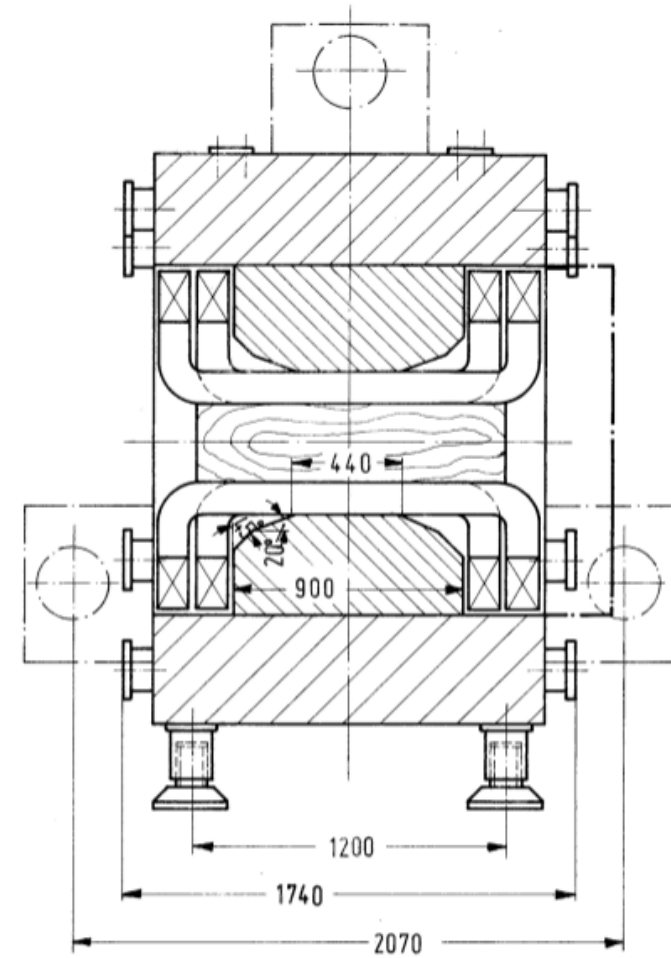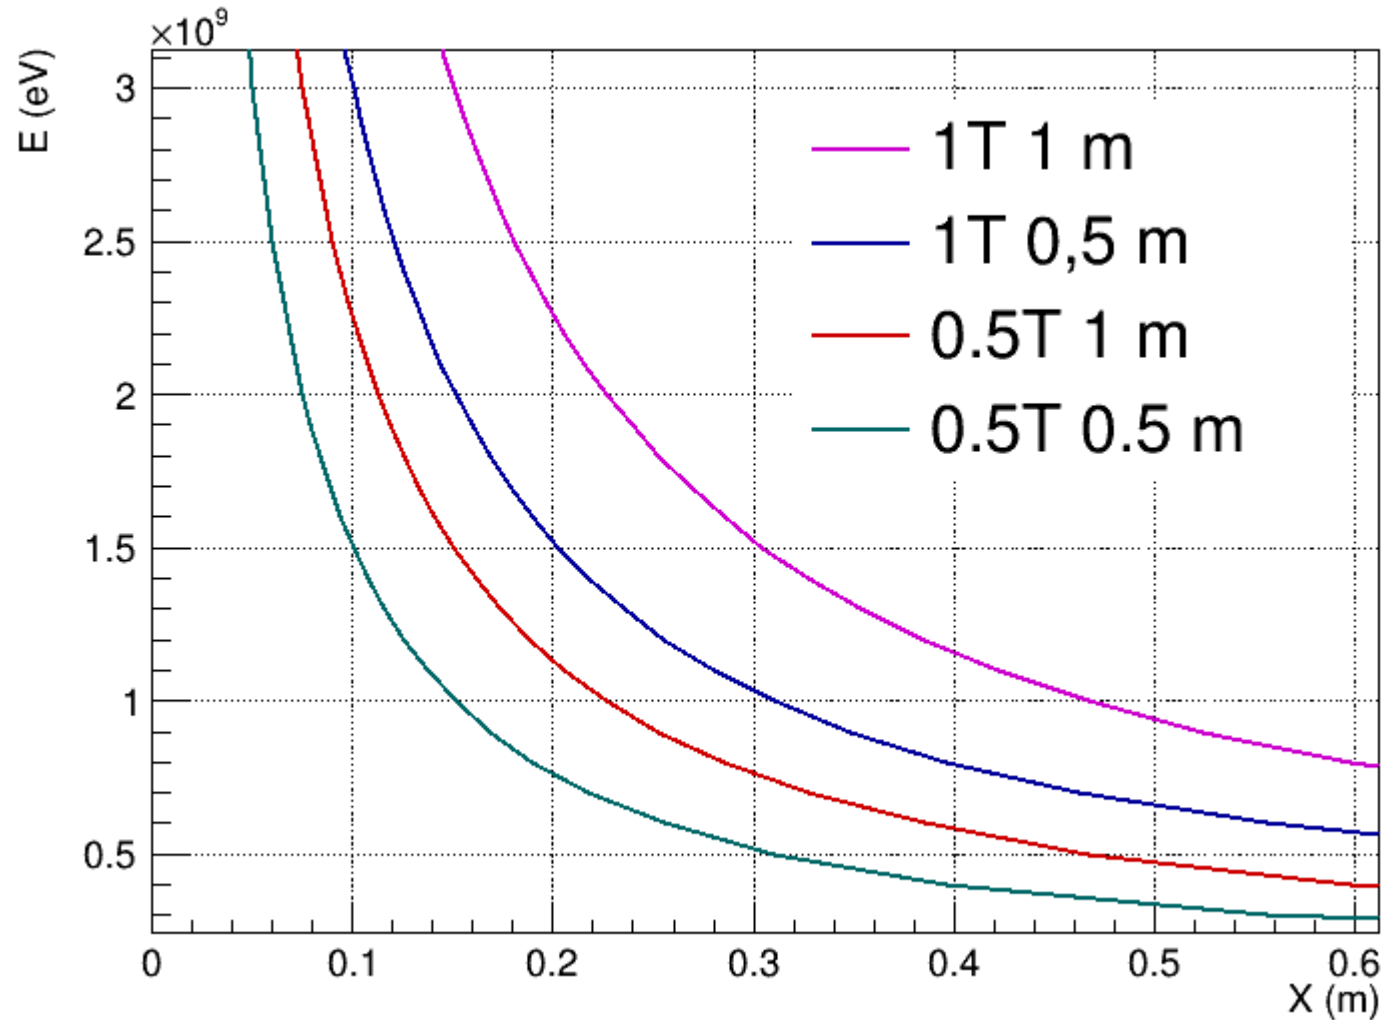

Back up




Initial electron phase space distribution.

Target 2 m, 5 m and 12 m upstream of IP

- 2 m: $\sigma_x = 19 \mu\text{m}$;
- 5 m: $\sigma_x = 43 \mu\text{m}$;
- 12 m: $\sigma_x = 100 \mu\text{m}$;

$\sigma_{x,y}$ at IP: $5 \mu\text{m}$;

Normalized emittance 1.4 mm mrad;

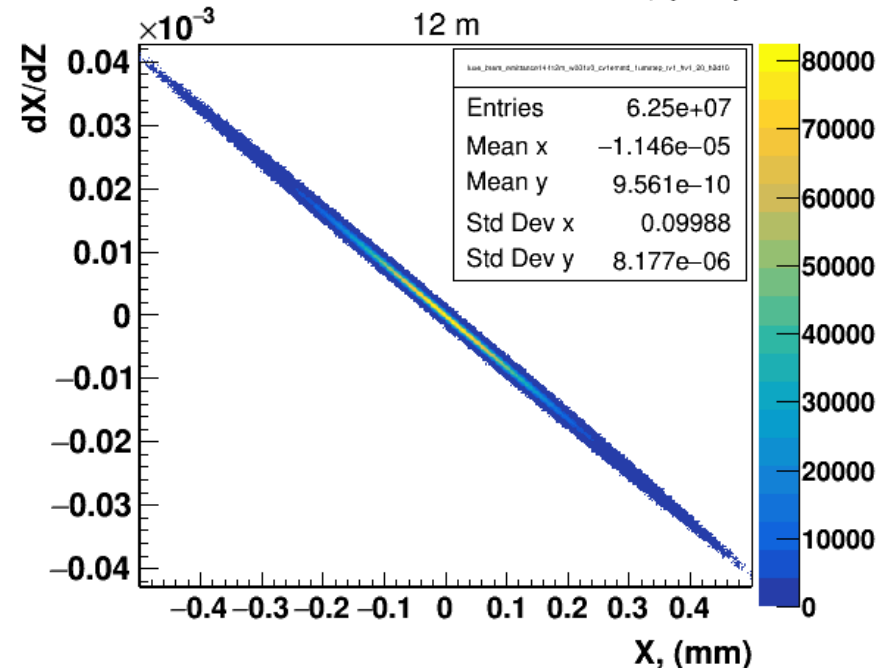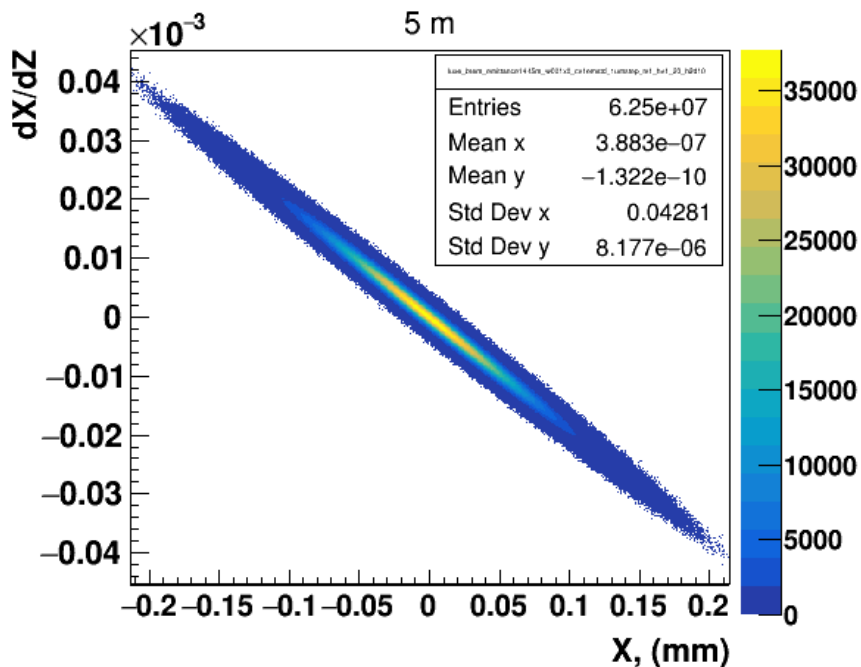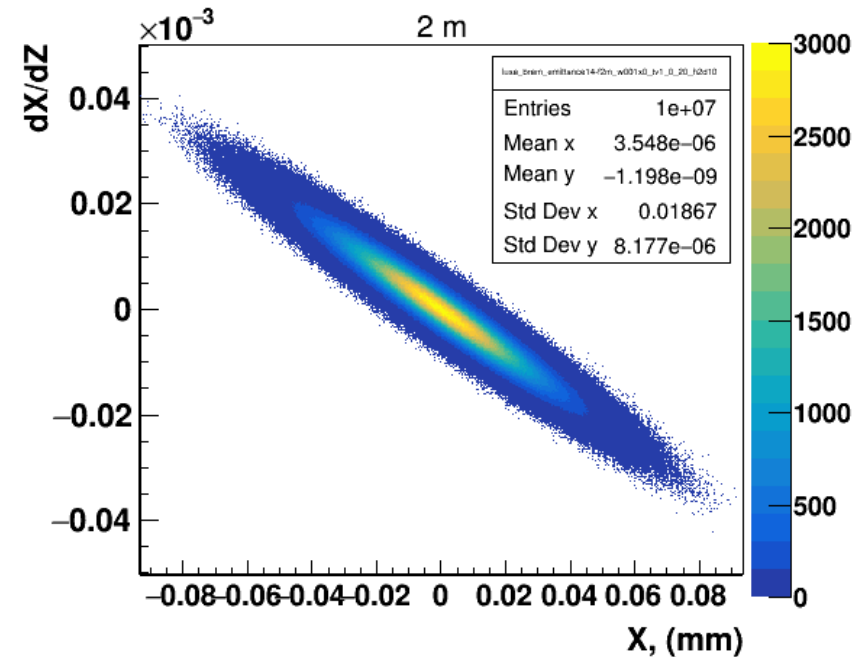

Electron and laser beam parameters

E_pulse, μJ	Crossing angle, rad	Laser σ_{xy} , μm	Laser σ_z , ps	N Electrons	Electron σ_x , mm	Electron σ_y , mm	Electron σ_z , ps
3.5×10^6	0.3	10	0.035	6.25×10^9	0.005	0.005	0.08

- Laser wavelength = 800.00 nm (1.5498 eV);
- Circular polarized.