


# Gamma Monitor using backscatters

Borysova Maryna (KINR)

LUXE technical meeting


DESY Hamburg

26/03/20

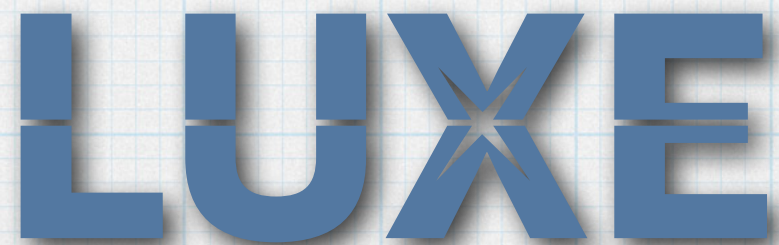
The logo for the LUXE experiment, featuring the word "LUXE" in a bold, blue, sans-serif font. A stylized, multi-pointed star or spark is positioned at the intersection of the 'X'.



# Gamma Monitor

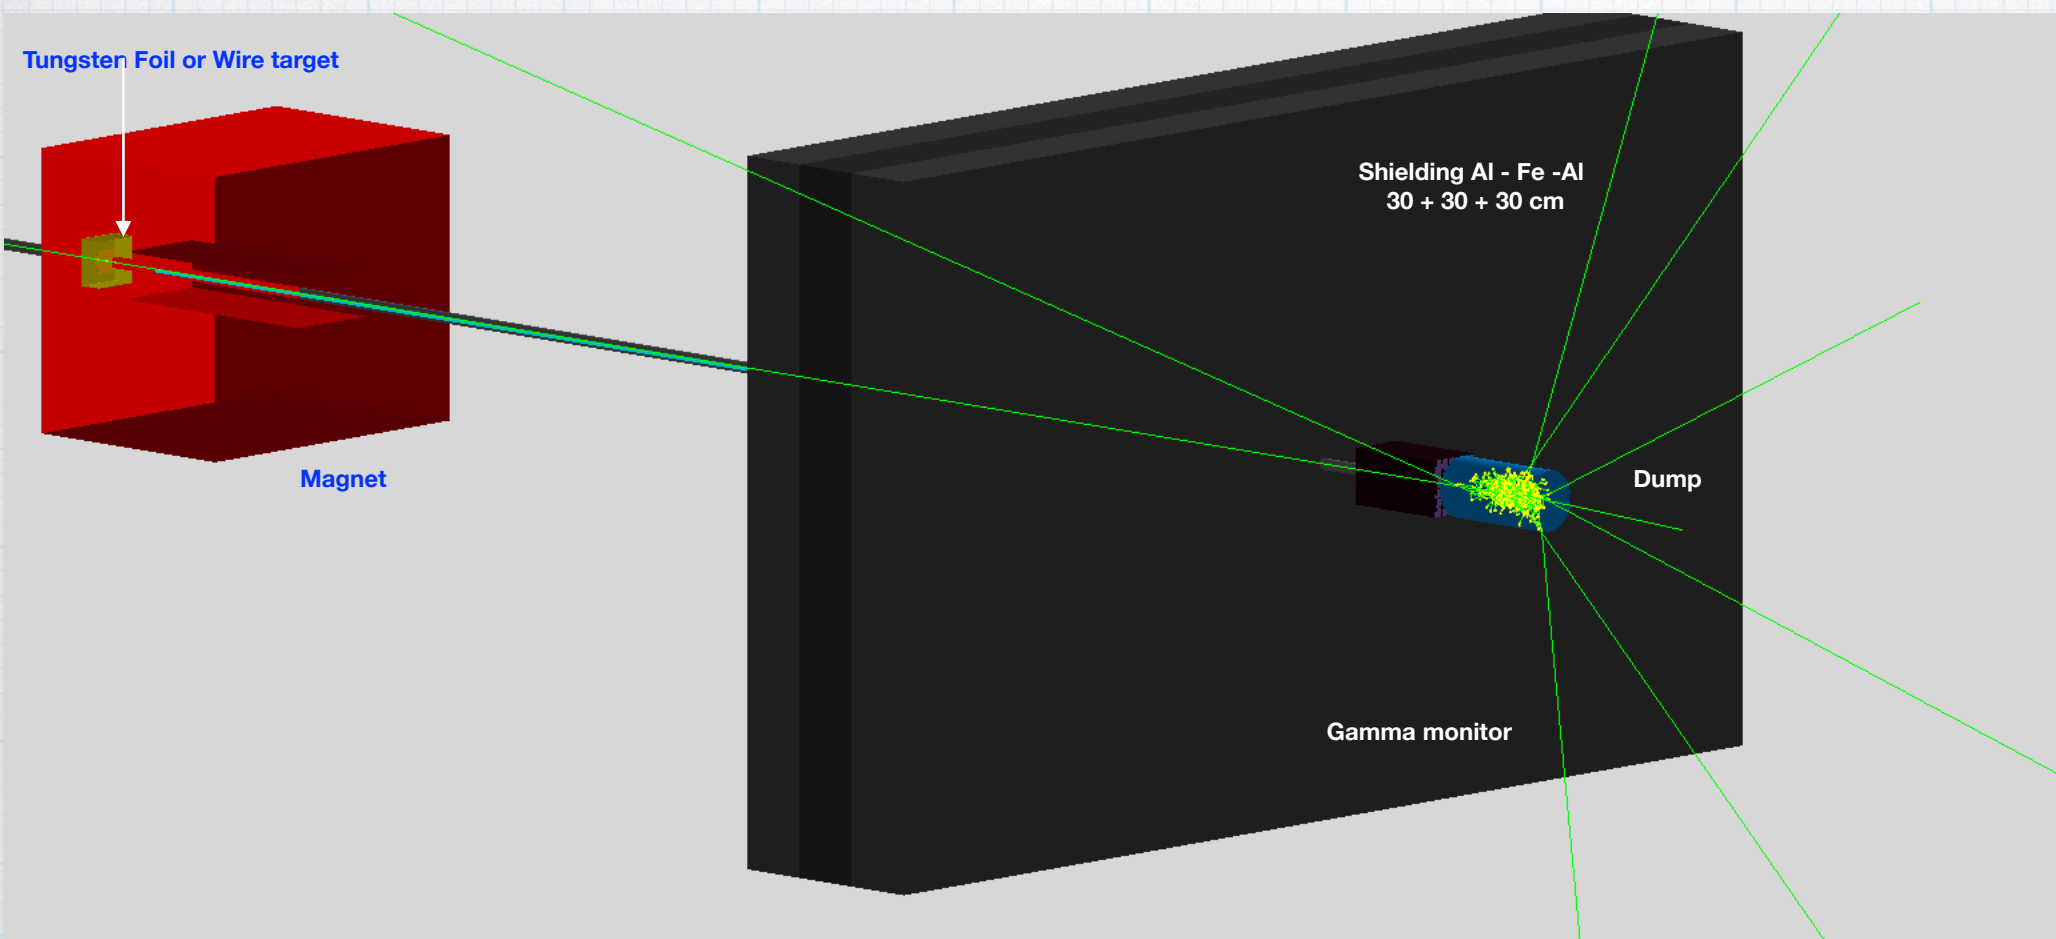


- \* The implementation of FDS in Luxe geometry with the LG Gamma Monitor made of new LG blocks in front of Al-Cu Dump,
- \* LG w/ measures  $3.8 \times 3.8 \text{ cm}^2$ , length is 45 cm
- \* Wrapped with Aluminium foil of 0.016 mm (typical household foil; no account for air)


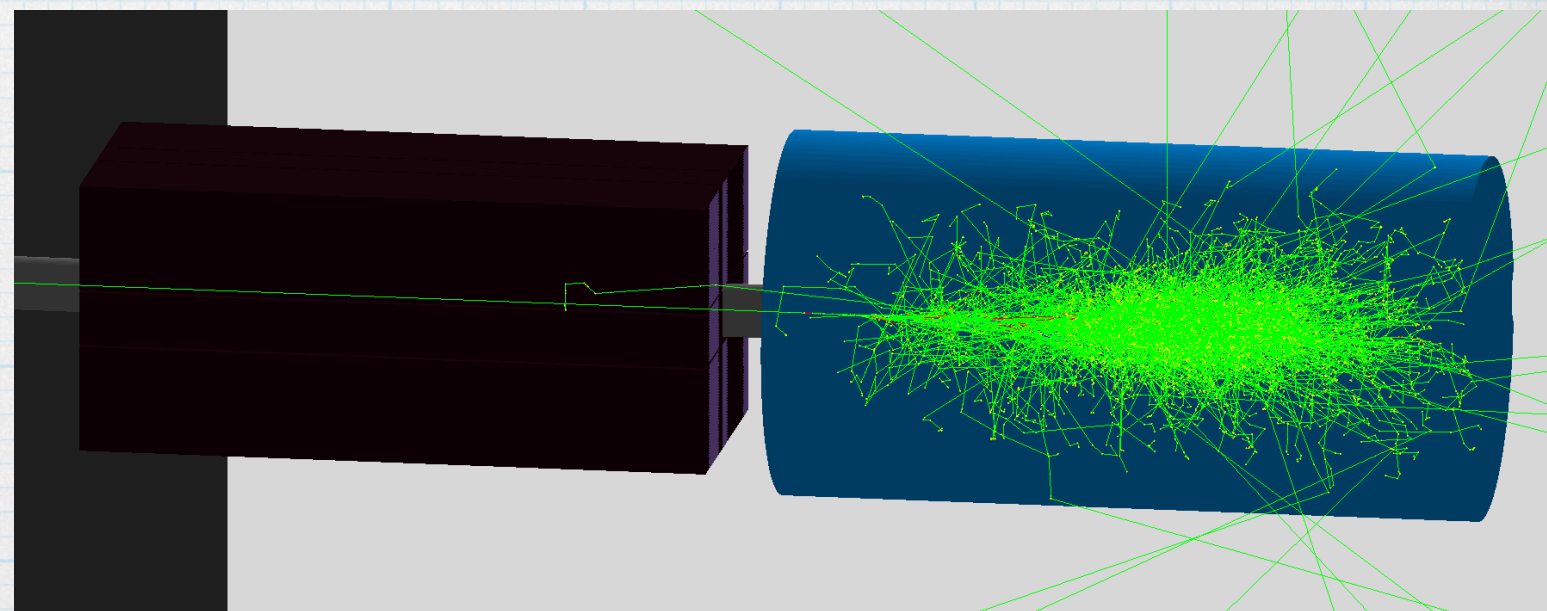




# 2 configurations: 48 vs 32 LG blocks

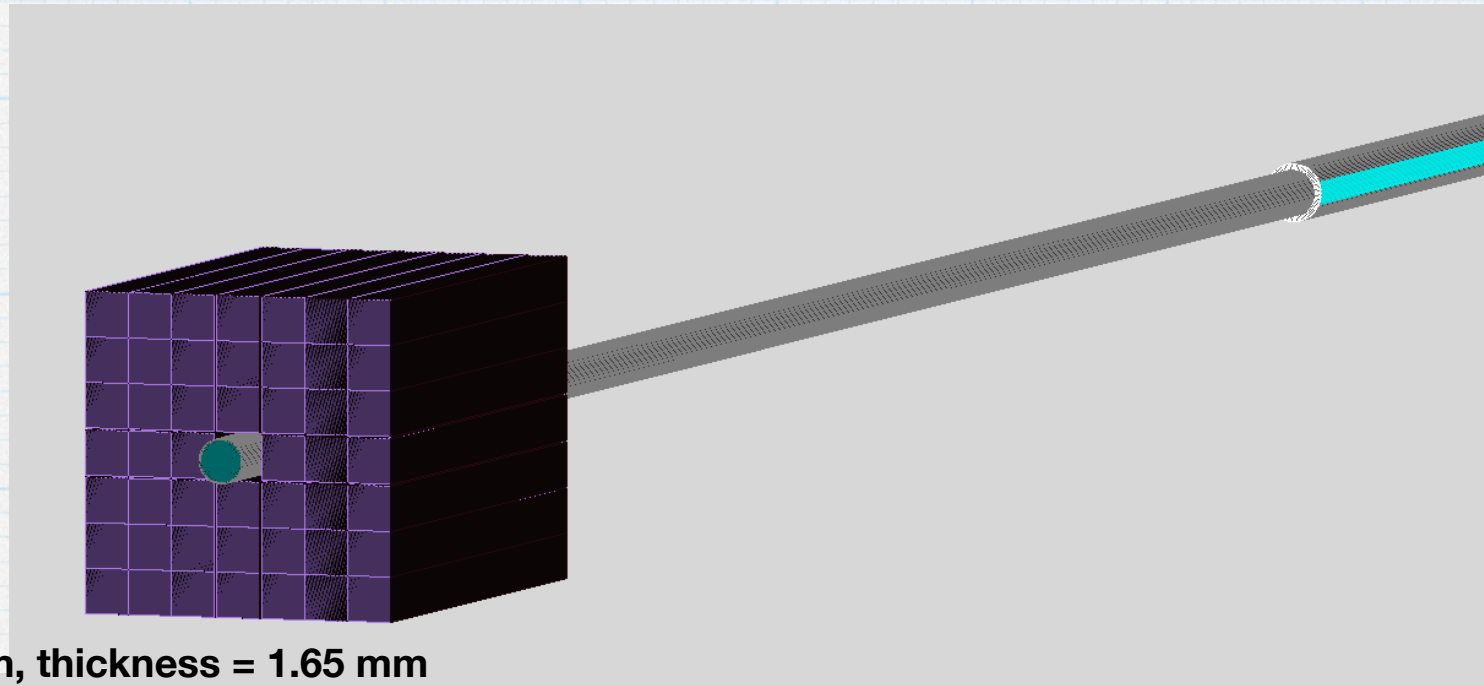

Beam Pipe ,  $R = 19.0$  \*mm, thickness = 1.65 mm

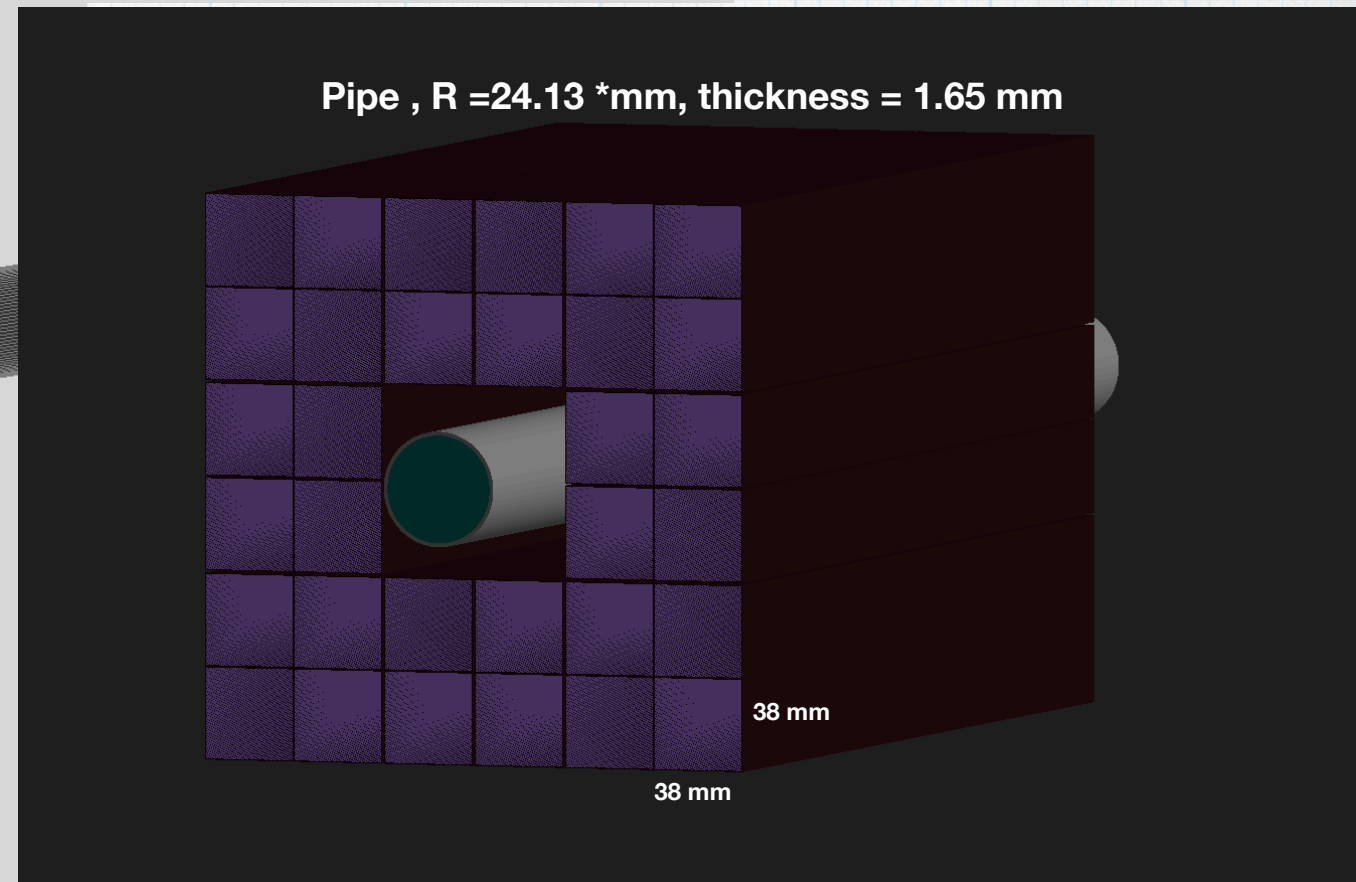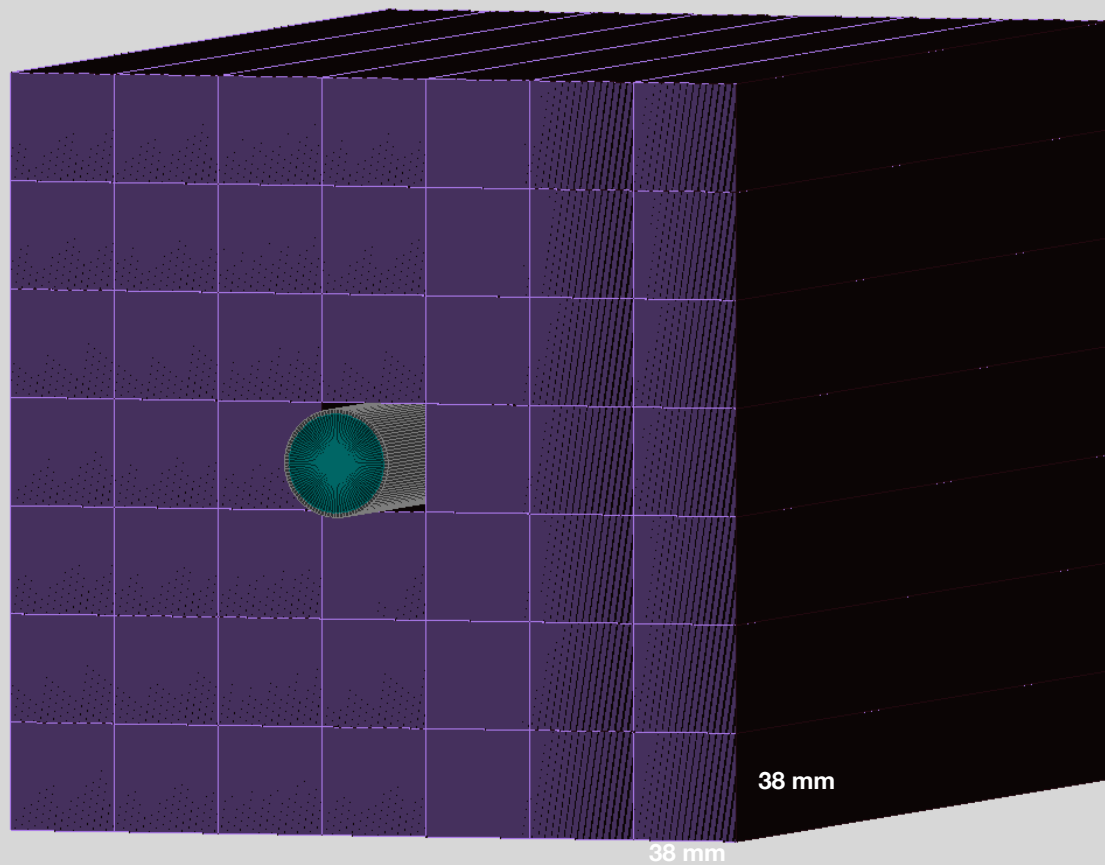

Reduced the size of the beam pipe to be consistent with the blocks size and to be able to monitor the area close to the beam pipe.



# Outlook

- **Gamma monitor studies:**

- ✱ **New, irradiated LG block are found and could be wrapped and used for GM.**
- ✱ **The implementation of two different configurations in Luxe geometry**
- ✱ **running the simulation with new geometry implementation**

**Further studies:**

**run the simulation and to compare to the previous one.**



Back up



# Lead glass blocks found in Hera West

- \* New TF-1 LG blocks! Not irradiated, w/ measures  $3.8 \times 3.8 \text{ cm}^2$ , length is 45 cm , ~50
- \* Will give the possibility to determine precisely coordinates and energies
- \* Spare modules for GAMS found in Hera West thanks to Sergey Schuwalow
- \* There is a preliminary agreement to move it to the LUXE Lab





# Chemical Composition of TF-1 IG


Table 1. Chemical composition and physical properties of the TF-1<sup>[10]</sup>.

Chemical composition (weight %)		Fractions atomic units
PbO	51.2	Pb-0.082232
SiO <sub>2</sub>	41.3	Si-0.246406
K <sub>2</sub> O	3.5	O-0.608358
Na <sub>2</sub> O	3.5	K-0.038057
As <sub>2</sub> O <sub>3</sub>	0.5	NA-0.023135
Radiation length (cm)	2.50	AS-0.001812
Density (g/cm <sup>3</sup> )	3.86	
Critical energy (MeV)	15.57	
Refraction index	1.6476	

Used previously in  
GAMS-2000 spectrometer (Serpuchov)  
GAMS-4000 spectrometer (NA-12 experiment, CERN)

The measured energy resolution of the GAMS-4000 spectrometer for a single photon is  $\sigma_E/E = 0.011 + 0.053 / \sqrt{E(\text{GeV})}$ .




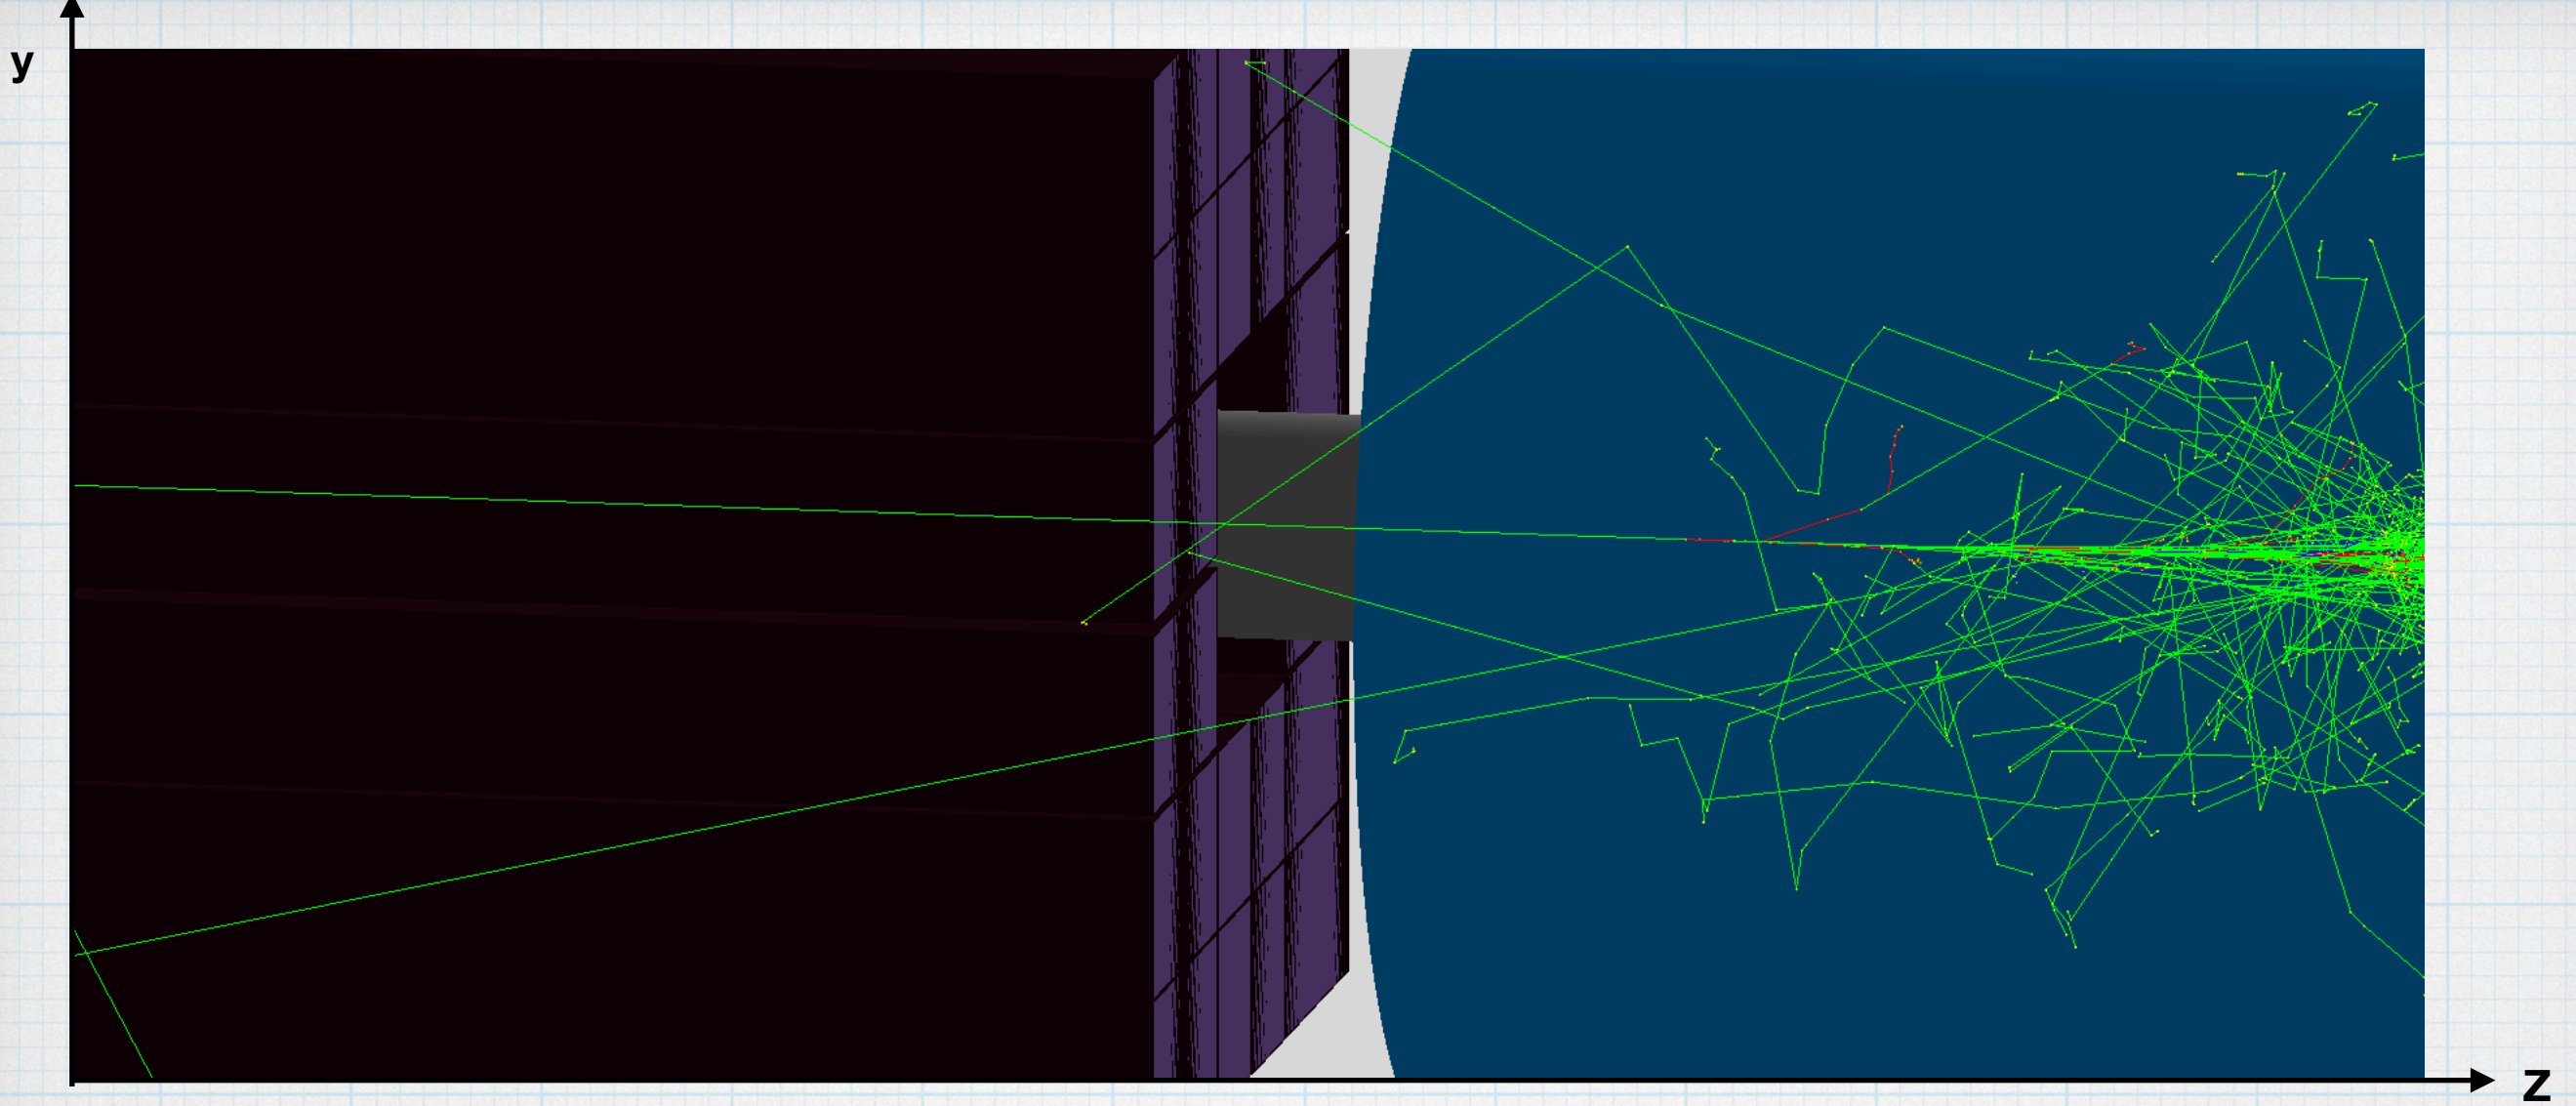

✱ The implementation in Luxe geometry of the LG Gamma Monitor made of 32 new LG blocks in front of Al-Cu Dump ( $R(\text{Cu}) = 13.0 \text{ cm}$ ;  $R(\text{Al}) = 6.5 \text{ cm}$  &  $L(\text{Al}) = 20 \text{ cm}$ )

✱ 32 LG w/ measures  $3.8 \times 3.8 \text{ cm}^2$ , length is 45 cm



✱ Each block is wrapped with Aluminium foil of 1 mm

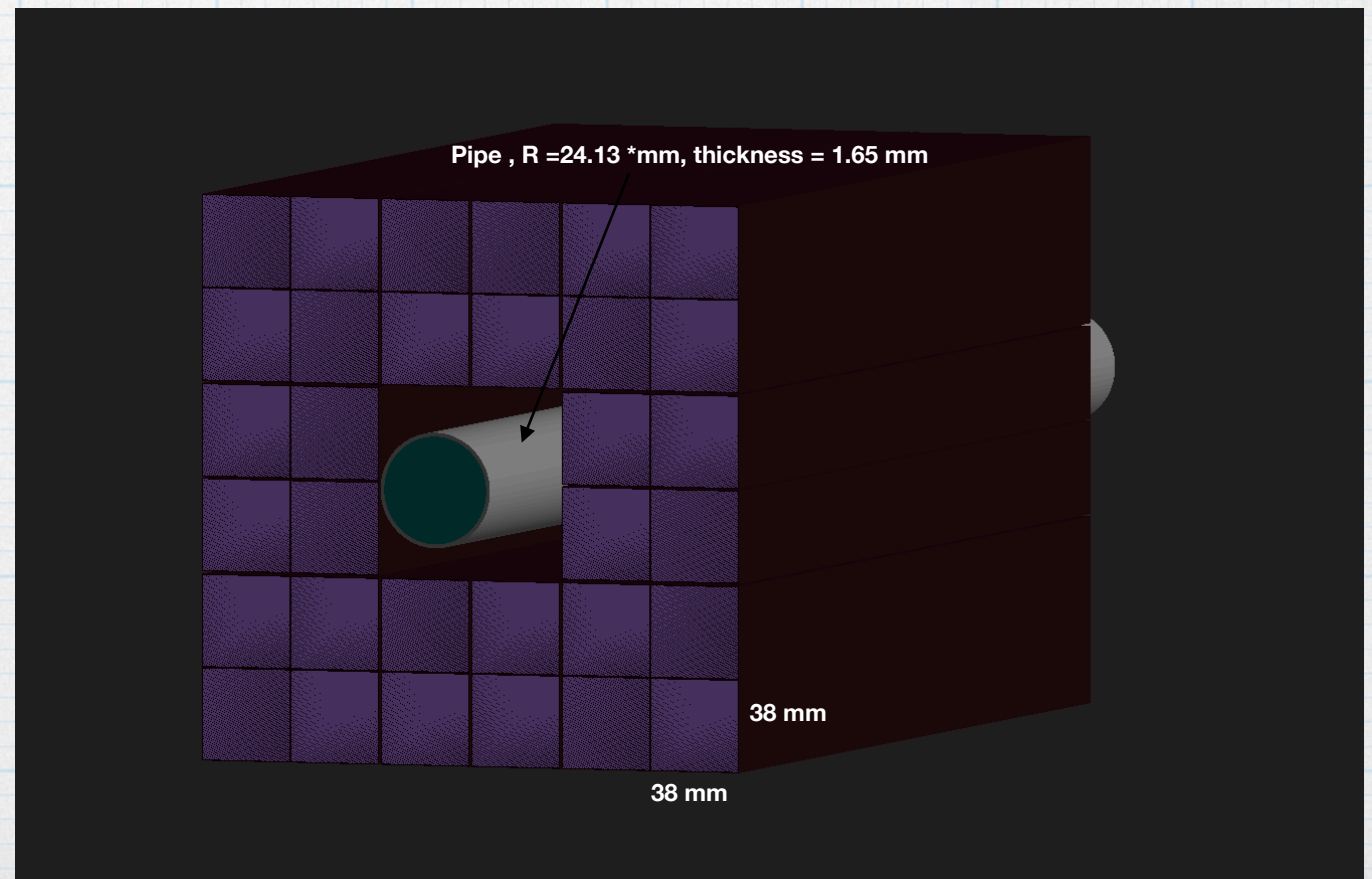




# Simulation and Performance

Track density on the surface of LG blocks in XY and XZ planes

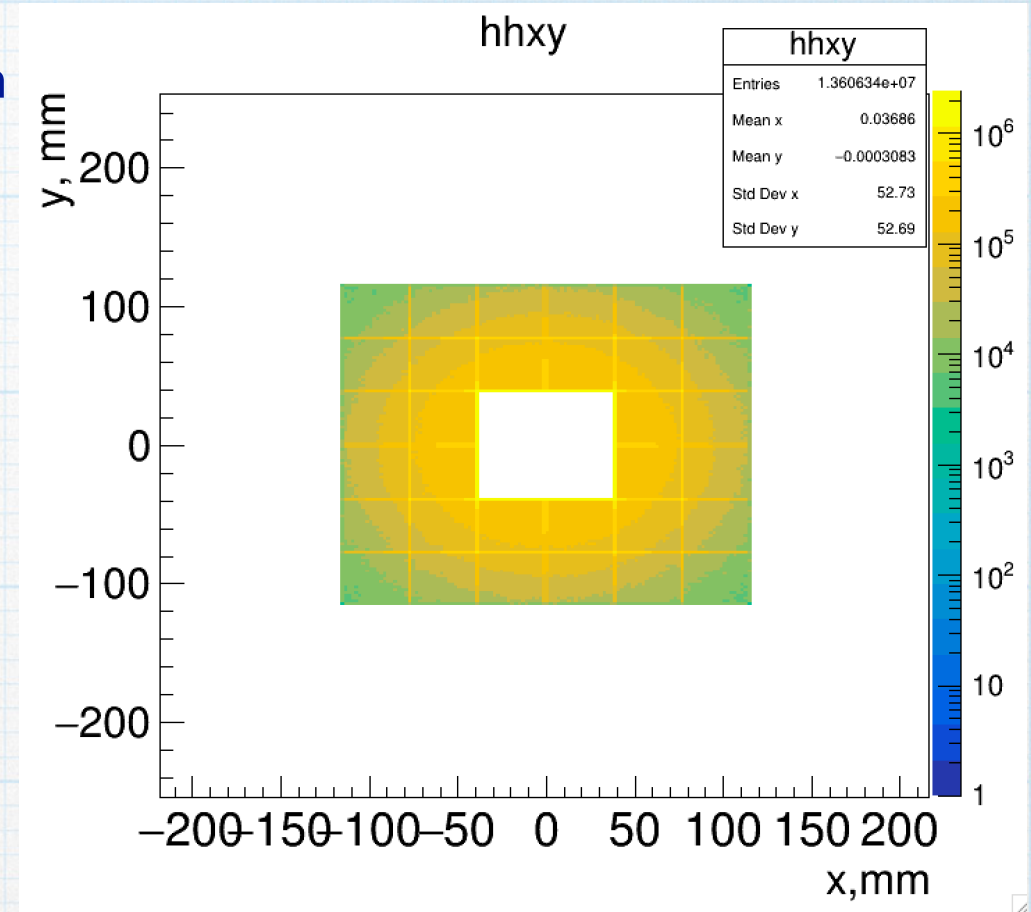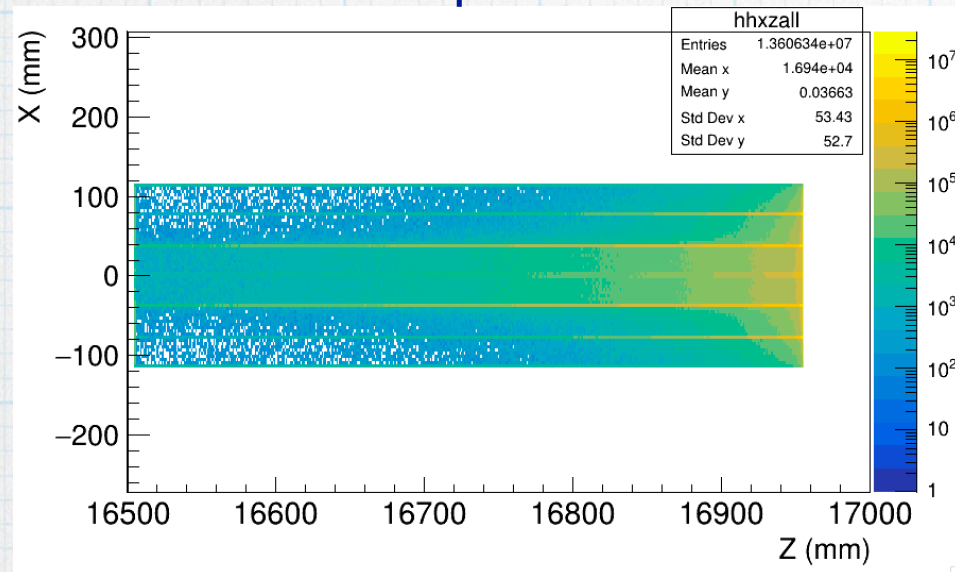


Deposited energy versus true number of photons. Each point is one BX

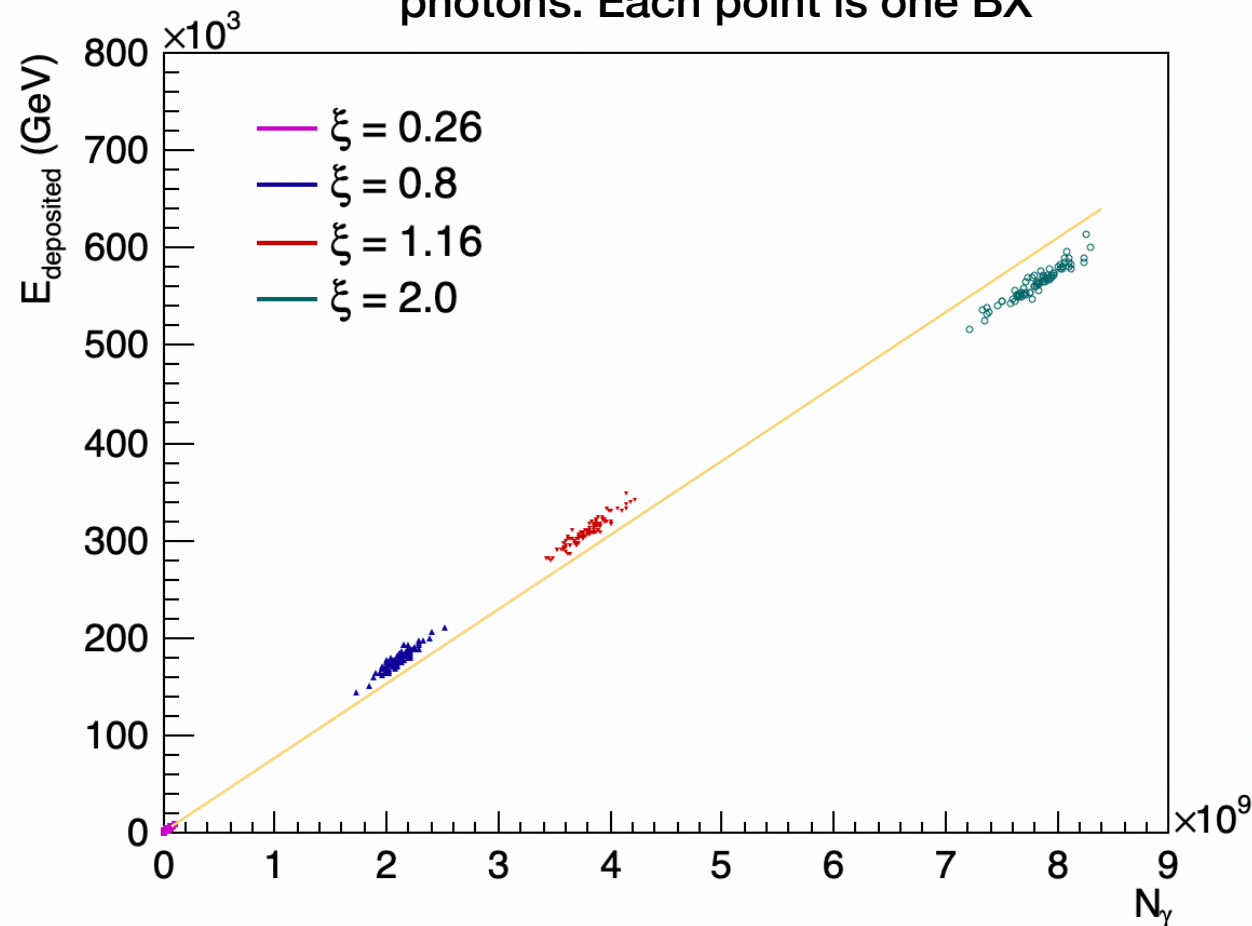

- The (almost) linear dependence of deposited energy on number of incoming photons in GM allows the usage of backscatters for monitoring the photon flux
- For small  $\xi$  the HICS spectrum is softer and soft photons produce less backscatters. This is the reason of small deviation from linearity in Edep on  $E_\gamma$  dependence








# The distribution of particles tracks entering LG Gamma monitor in XY and XZ planes

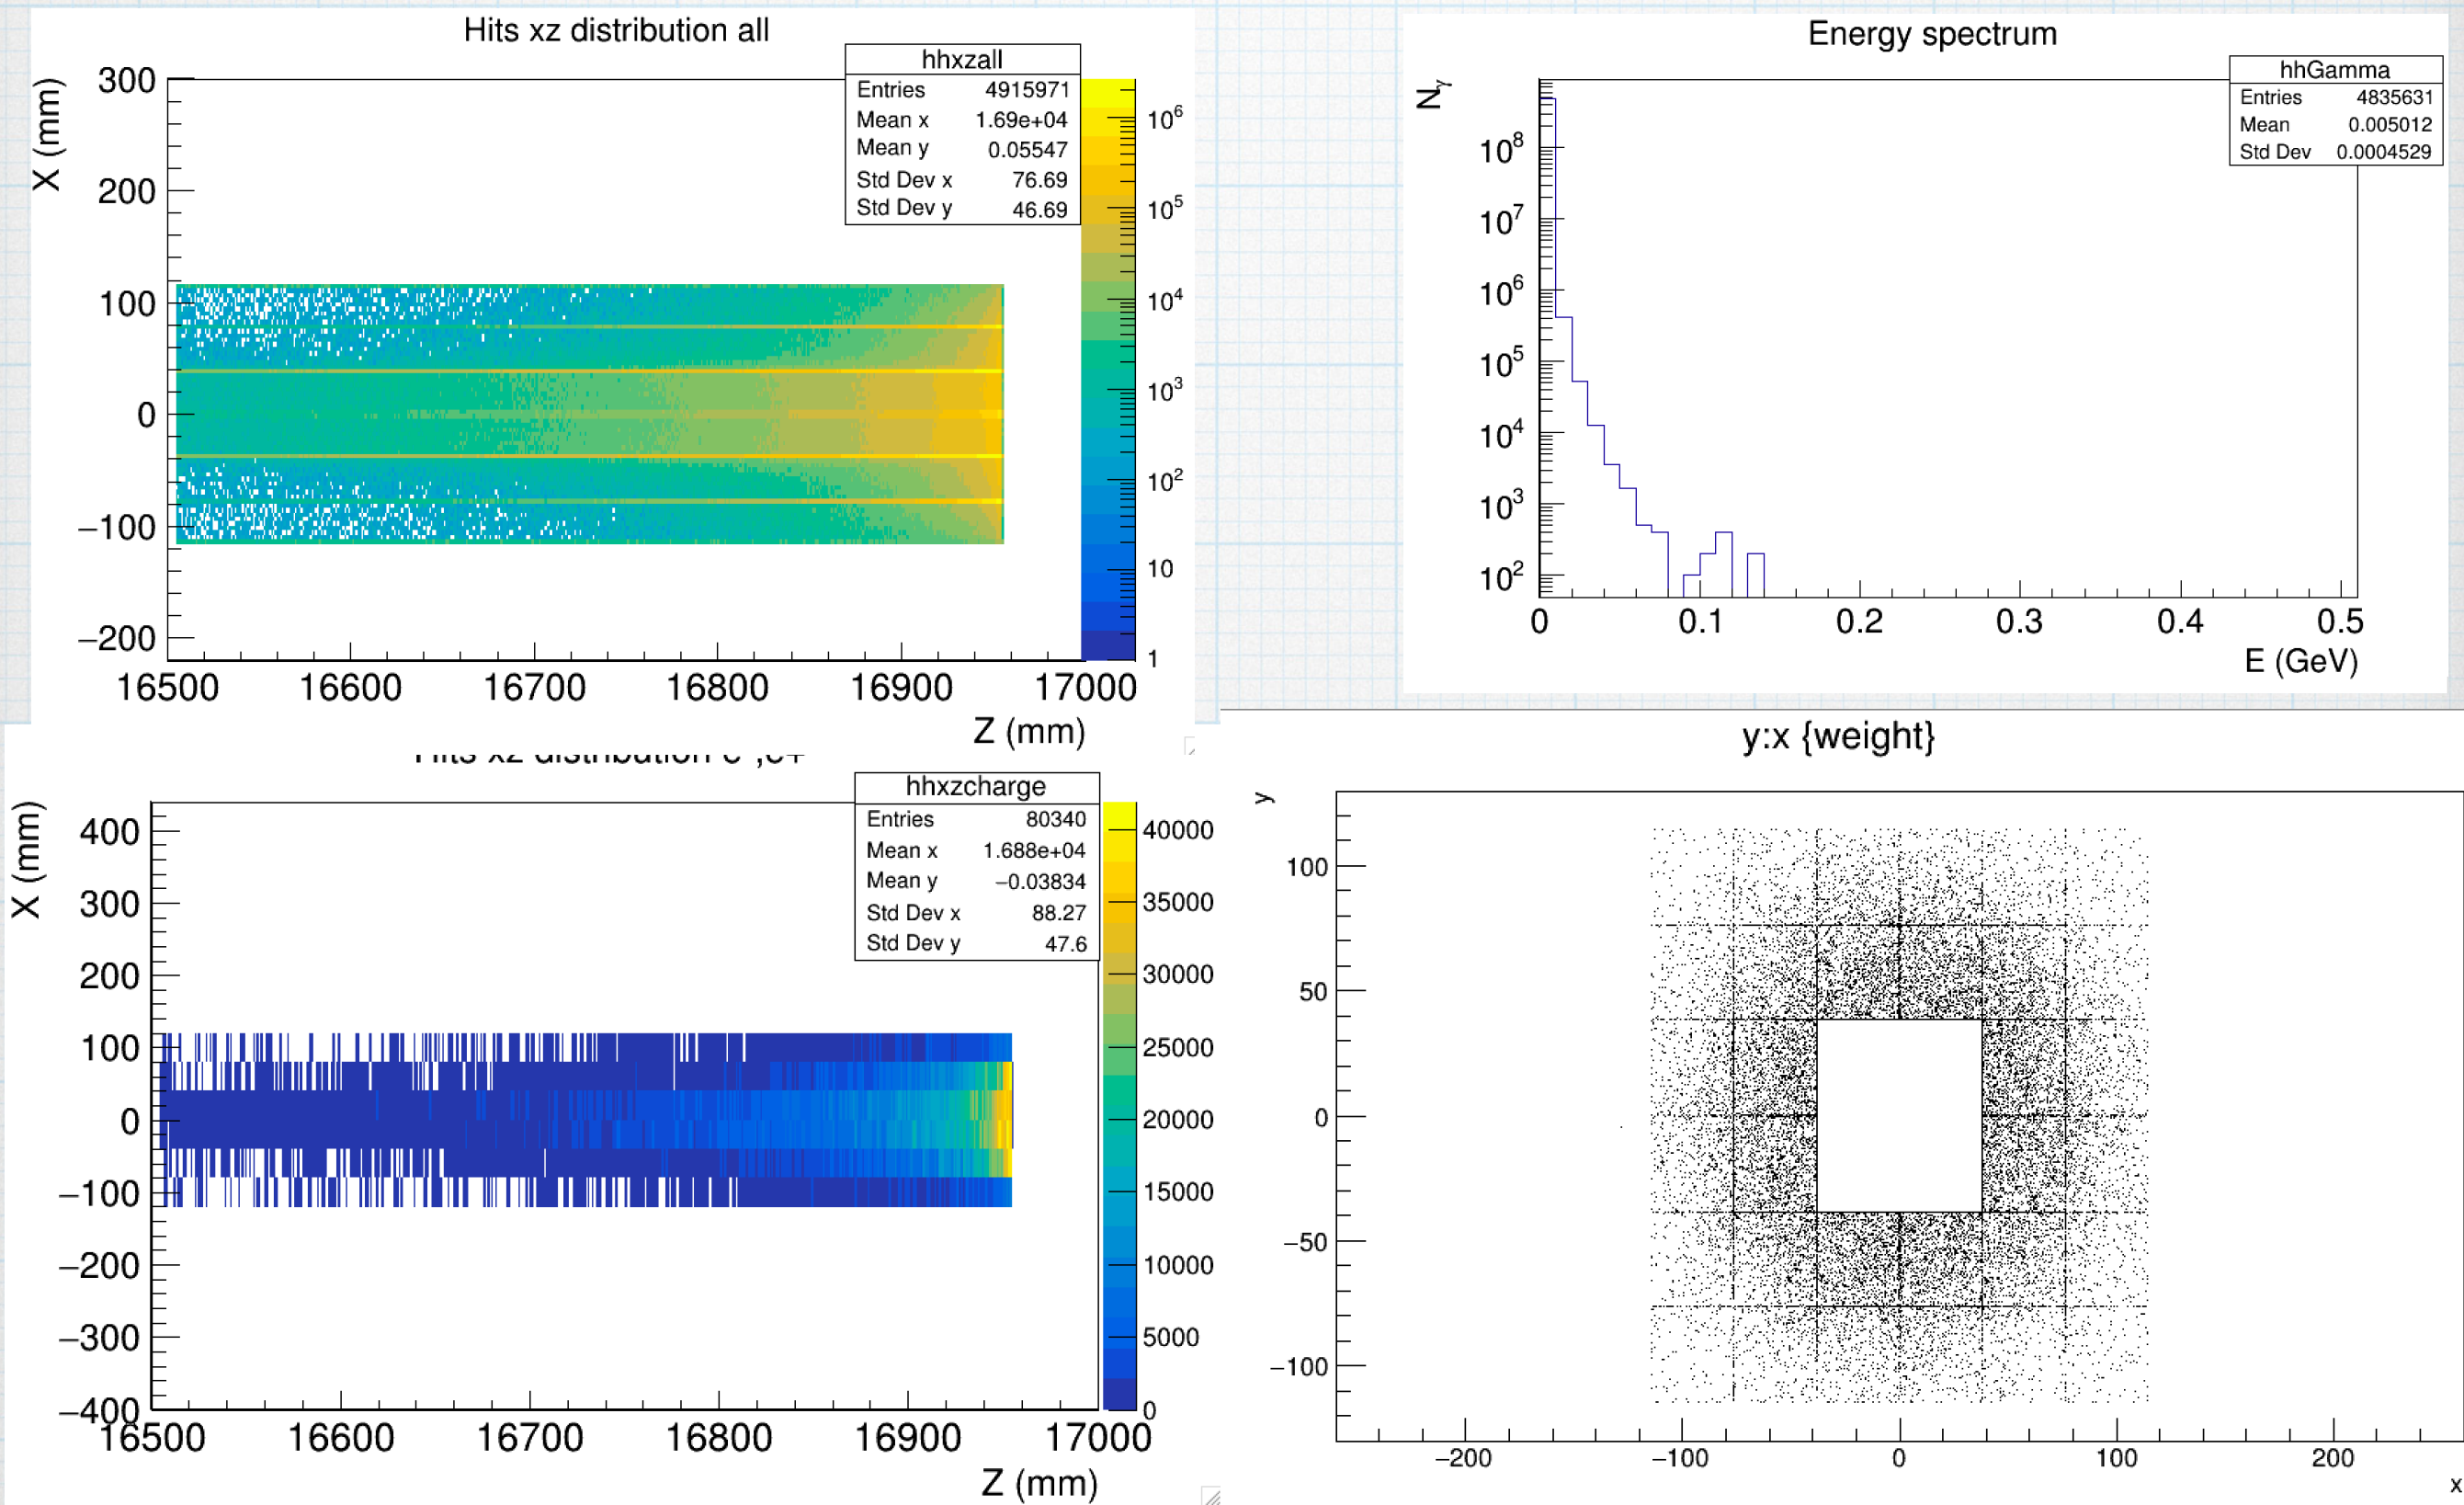





Required all the vertices to be from Beam Dump

Vertex Z

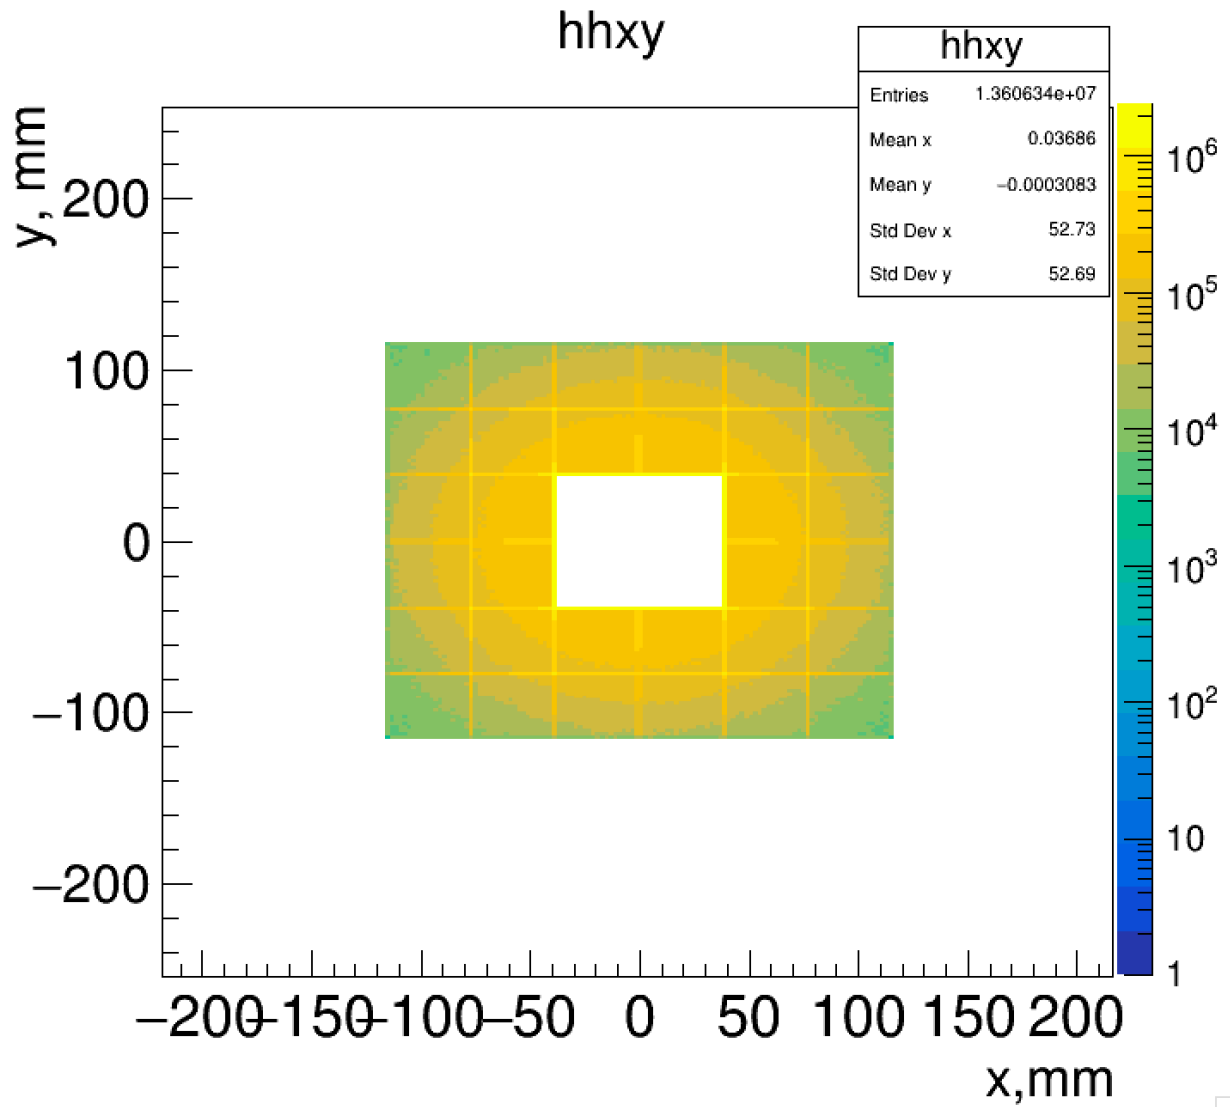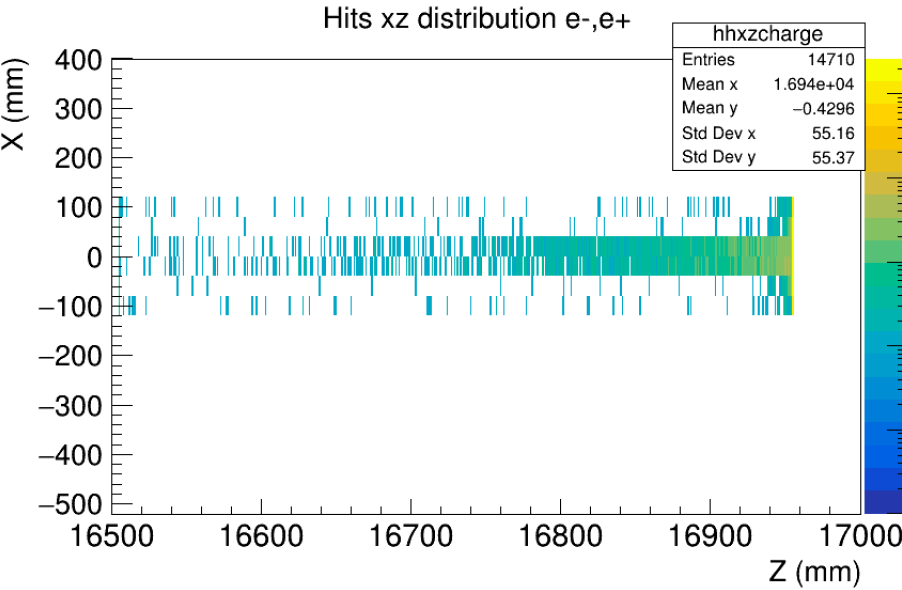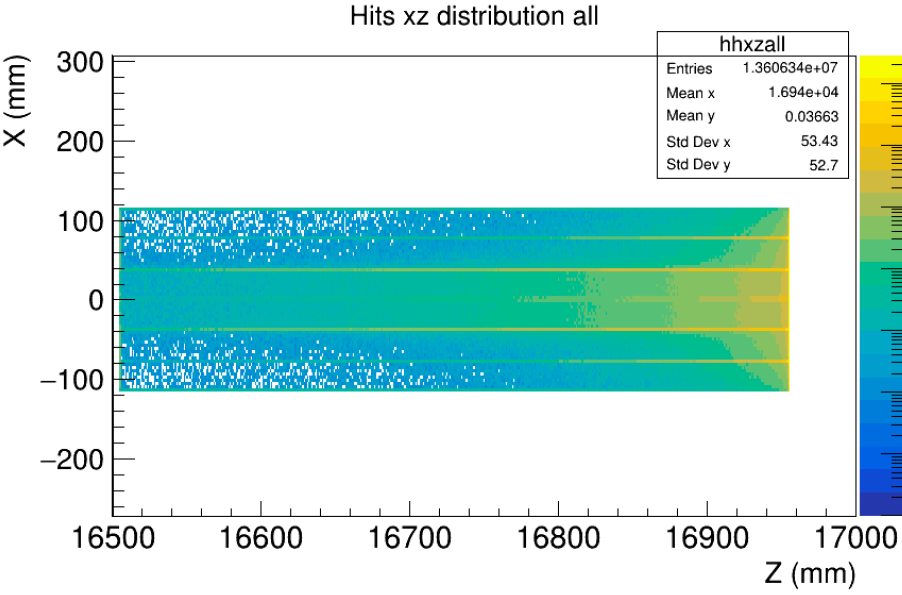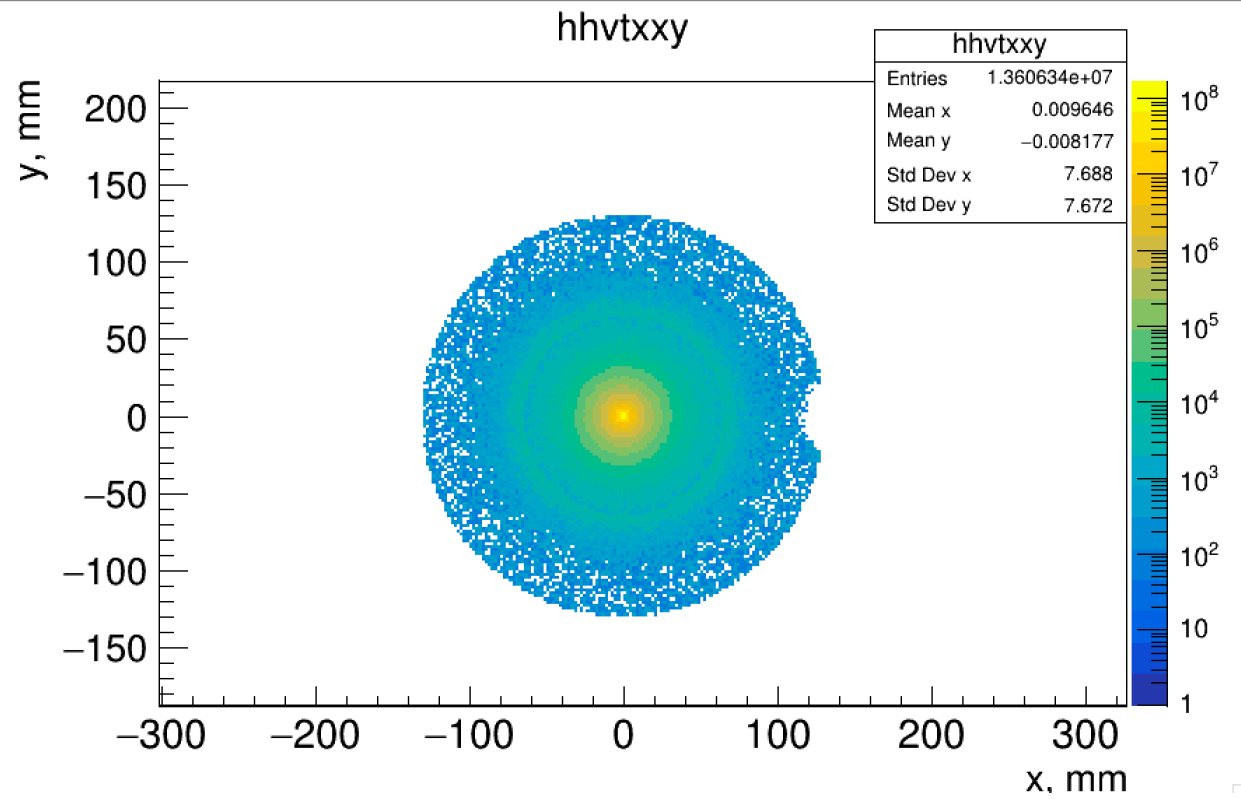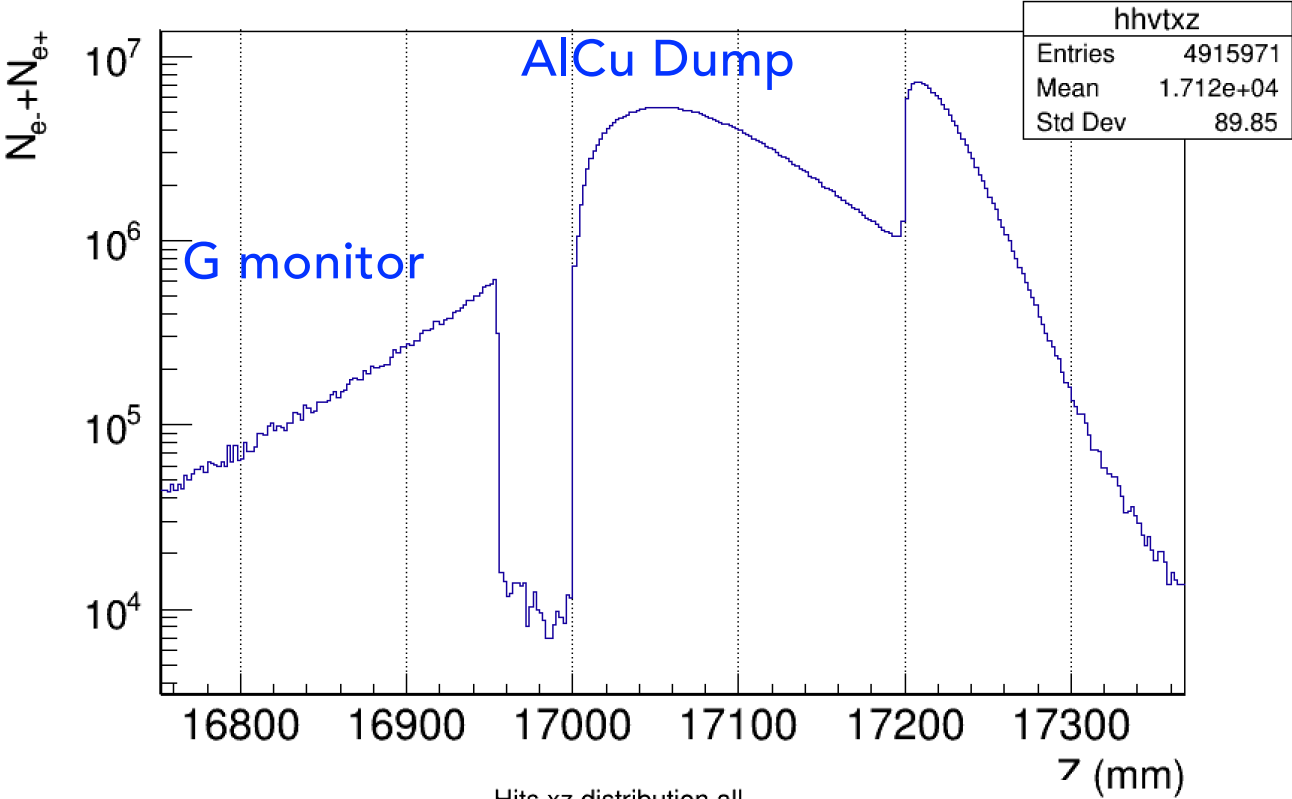



# The dependence of deposited energy on number of incoming photons per BX for LG Gamma monitor and AlCu dump

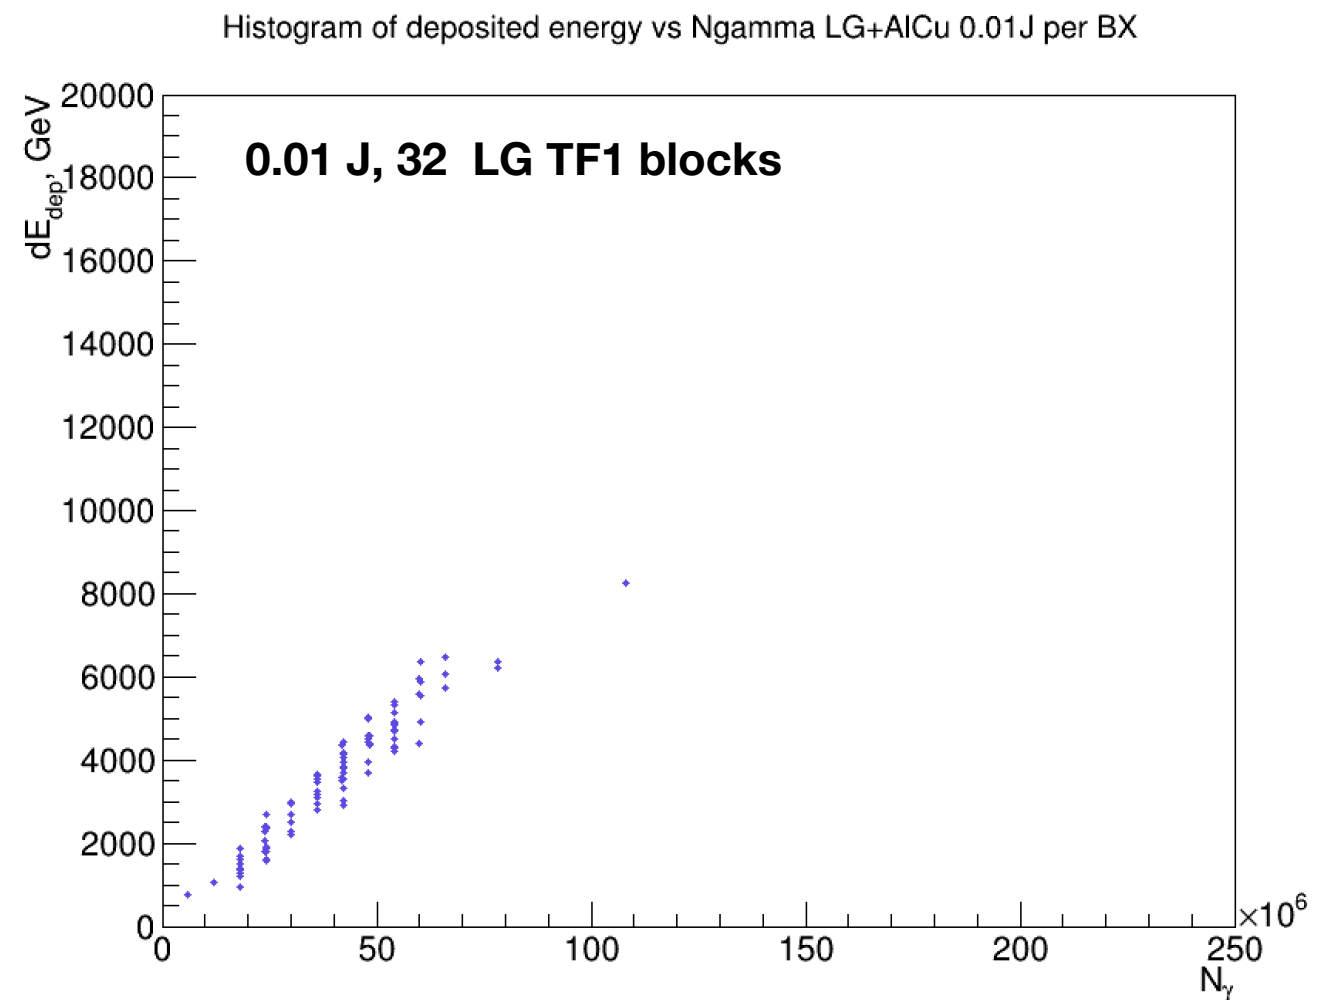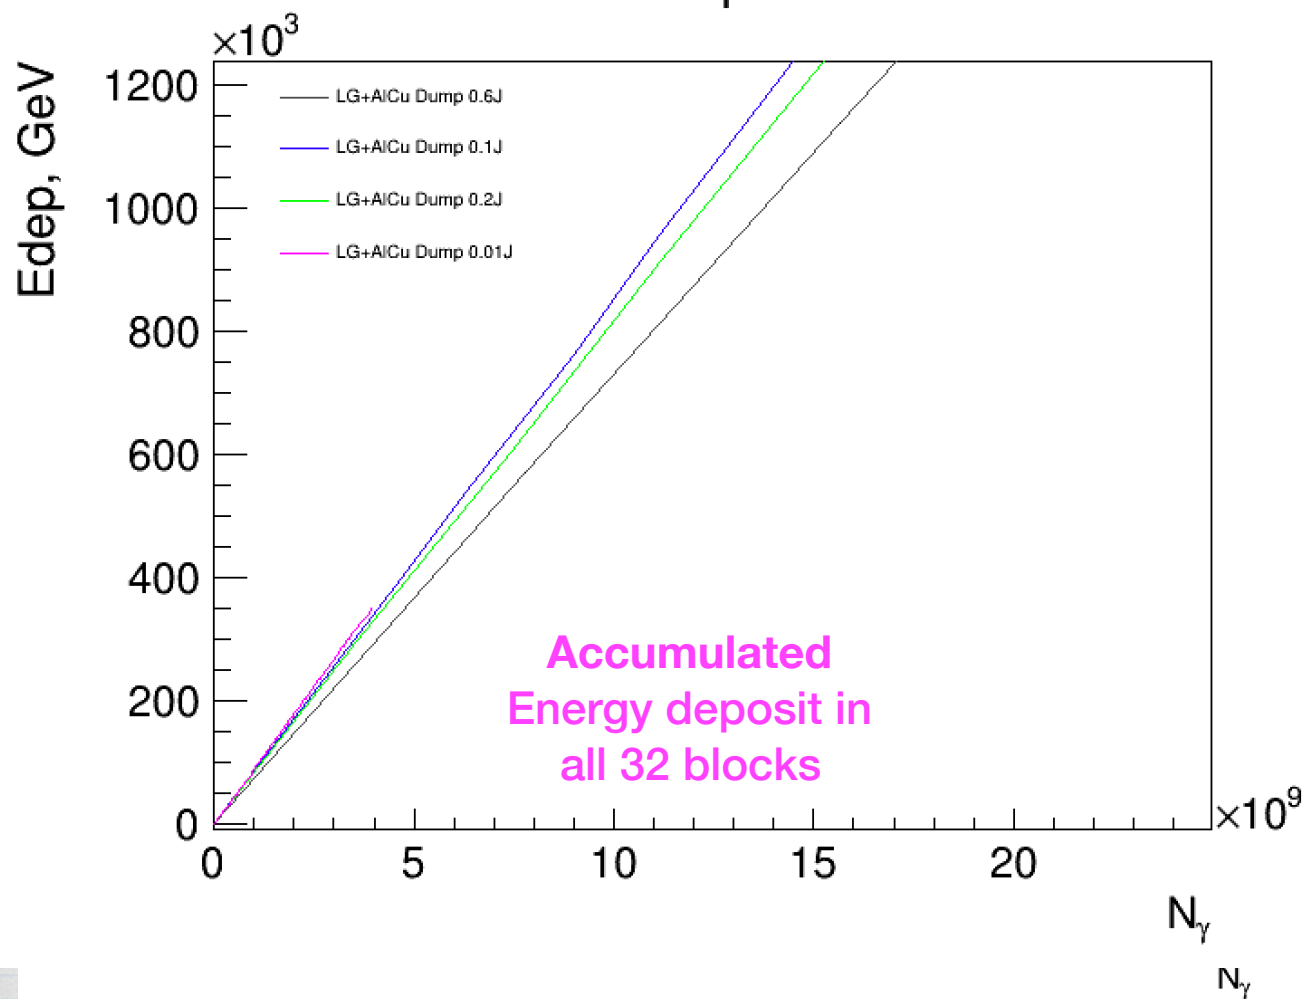

Energy deposit on Ngamma  
Each point is one BX, xi=0.26