

Physics Performance and Detector Requirements at an Asymmetric Higgs Factory

Antoine Laudrain (he/him)

& Ties Behnke, Mikael Berggren, Karsten Büsser, Frank Gaede, Christophe Grojean,
Benno List, Jenny List, Jürgen Reuter, Christian Schwanenberger



EPS-HEP Conference — Hamburg, 23/08/2023

Parallel session: Detector R&D and Data Handling

HELMHOLTZ

antoine.laudrain@desy.de

CLUSTER OF EXCELLENCE
QUANTUM UNIVERSE



Future lepton colliders landscape

Circular



(?)

Linear



...



- **Very expensive: O(>10B)**
- **Large environmental impact**
- Power hungry
- High lumi
- Upgradable to hadron collider

- **Expensive: very roughly O(5B)**
- **Slightly lower environmental impact**
- Less power hungry
- Extendable to higher energy

Cost (€ and environmental) driven by length, not operation

How to reduce the cost?

"Simply" decrease the size of the tunnel...

- But **shorter tunnel = lower beam energy** => physicists 😭

How to reduce the cost?

"Simply" decrease the size of the tunnel...

- But **shorter tunnel = lower beam energy** => physicists 😭
- Except if you can get higher gradients!
 - RF: ~30 MV/m (ILC)
 - **Plasma wake field acceleration** (PWFA) cavities ~ expected O(1000 MV/m) — ie x30!

How to reduce the cost?

"Simply" decrease the size of the tunnel...

- But **shorter tunnel = lower beam energy** => physicists 😭
- Except if you can get higher gradients!
 - RF: ~30 MV/m (ILC)
 - **Plasma wake field acceleration** (PWFA) cavities ~ expected O(1000 MV/m) — ie x30!
- **PWFA** not yet available: **requires ~10 years of development...**
 - ... but fits the current timescales for future accelerators.
 - **Only for electron acceleration.**

How to reduce the cost?

"Simply" decrease the size of the tunnel...

- But **shorter tunnel = lower beam energy** => physicists 😭
- Except if you can get higher gradients!
 - RF: ~30 MV/m (ILC)
 - **Plasma wake field acceleration** (PWFA) cavities ~ expected O(1000 MV/m) — ie x30!
- **PWFA** not yet available: **requires ~10 years of development...**
 - ... but fits the current timescales for future accelerators.
 - **Only for electron acceleration.**
- => **Size of the facility could be reduced by a factor ~2** (on the electron side):
 - ILC(250 GeV): 10 km (e⁻, SRF) + 10 km (e⁺, SRF)
 - Hybrid: <1 km (e⁻, PWFA) + 10 km (e⁺, SRF)
 - Not yet attractive enough regarding cost saving vs added complexity.

How to reduce the cost?

"Simply" decrease the size of the tunnel...


- But **shorter tunnel = lower beam energy** => physicists 😭
- Except if you can get higher gradients!
 - RF: ~30 MV/m (ILC)
 - **Plasma wake field acceleration** (PWFA) cavities ~ expected O(1000 MV/m) — ie x30!
- **PWFA** not yet available: **requires ~10 years of development...**
 - ... but fits the current timescales for future accelerators.
 - **Only for electron acceleration.**
- => **Size of the facility could be reduced by a factor ~2** (on the electron side):
 - ILC(250 GeV): 10 km (e⁻, SRF) + 10 km (e⁺, SRF)
 - Hybrid: <1 km (e⁻, PWFA) + 10 km (e⁺, SRF)
 - Not yet attractive enough regarding cost saving vs added complexity.
- **Can we do better than 1 km + 10 km?**

The HALHF concept

arxiv:2303.10150

See talk by B. Foster
this afternoon
(T13 - Accelerators for HEP)

Hybrid : mix of plasma (e^-) and SRF (e^+) acceleration
Asymmetric : **500 GeV e^- & 31.3 GeV e^+** (also gives $\sqrt{s} = 250$ GeV)
Linear : (not circular)
Higgs : (but could go up to $t\bar{t}$ threshold)
Factory

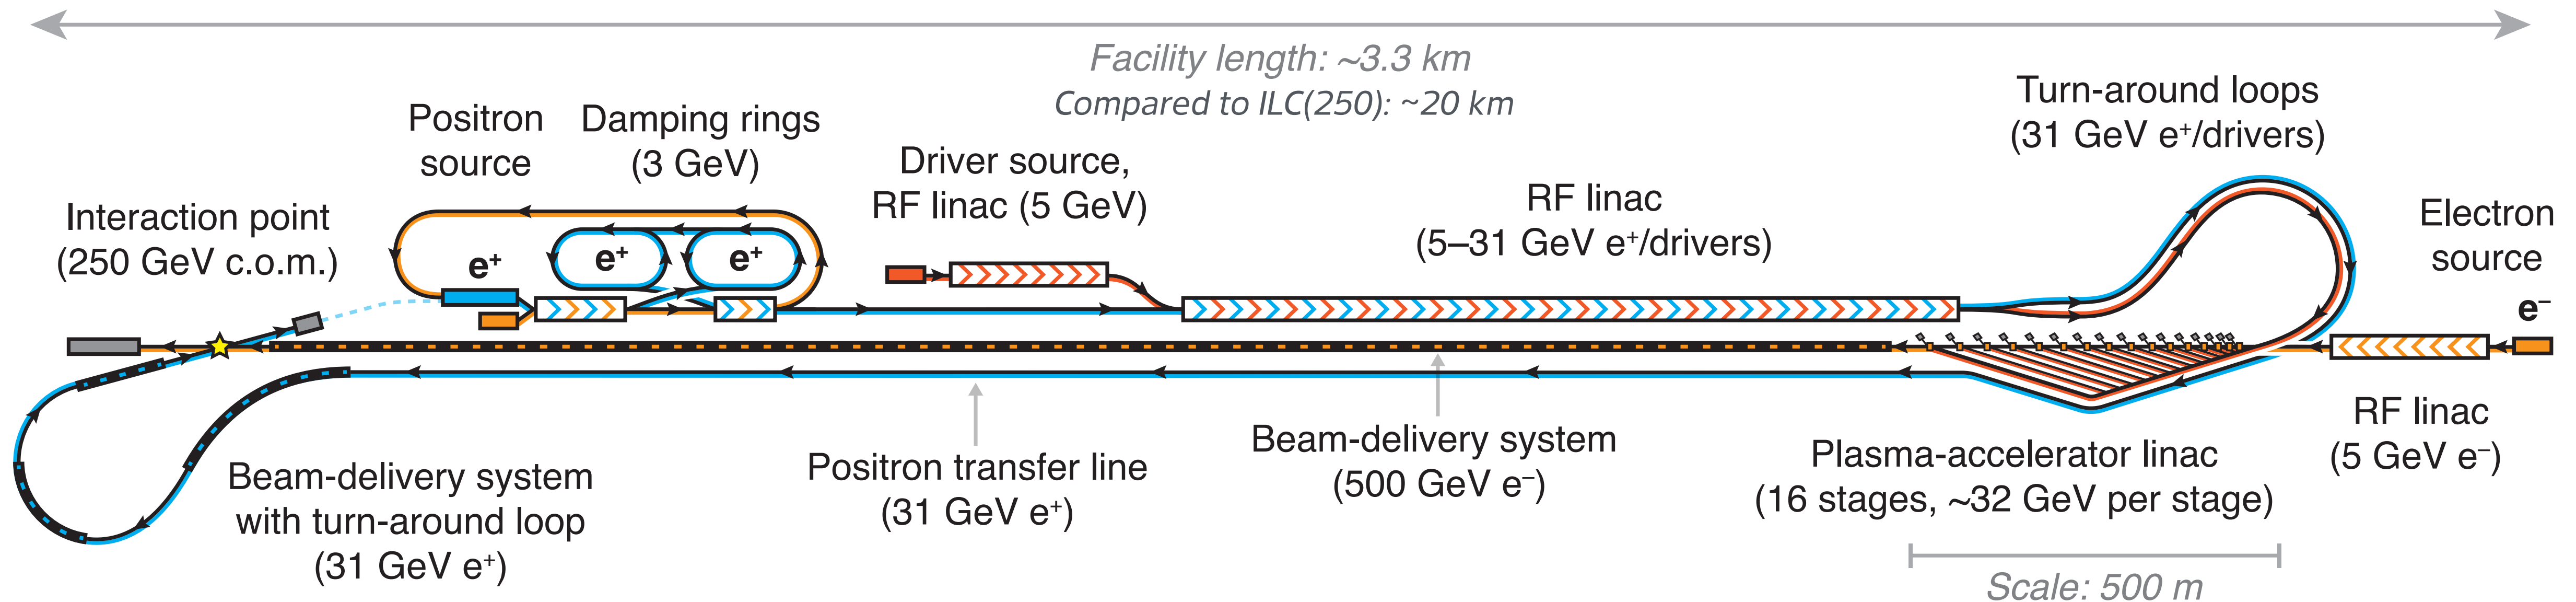

Length = ~ 3.3 km: similar to XFEL@DESY
 Cost = ~ 2.1 B€ $\pm 25\%$ = \sim ILC/4 = \sim EIC



Length dominated by e^- BDS
 Cost still dominated by tunnel and RFL

Now the questions arise

- Asymmetric beam energies => boosted topologies ($\gamma \sim 2.1$)
 - **Can we still do physics in such conditions?**
 - Not scary for anyone who worked at HERA ($\gamma = 3$)...
 - ... Yet, it's not quite the same physics 🤔
- Study cases:
 - **Higgs mass** measurement.
 - **Forward/backward asymmetry** measurement.
- Other question: how does it impact the energy efficiency?
- Not studied here: boost most likely improves jet flavour-tagging.



Impact on physics: Higgs

- Process: $e^+e^- \rightarrow Z(\mu^+\mu^-)H$
- Measure Higgs mass via recoil mass.
- Detector: ILD with fast simulation (SGV), including correct tracking.
- **Resolution loss due muons being boosted forward:**
 - less lever arm => lower muon momentum resolution.
 - $\sigma_{\text{ILD@HALHF}} = 2.2 \times \sigma_{\text{ILD@ILC}}$

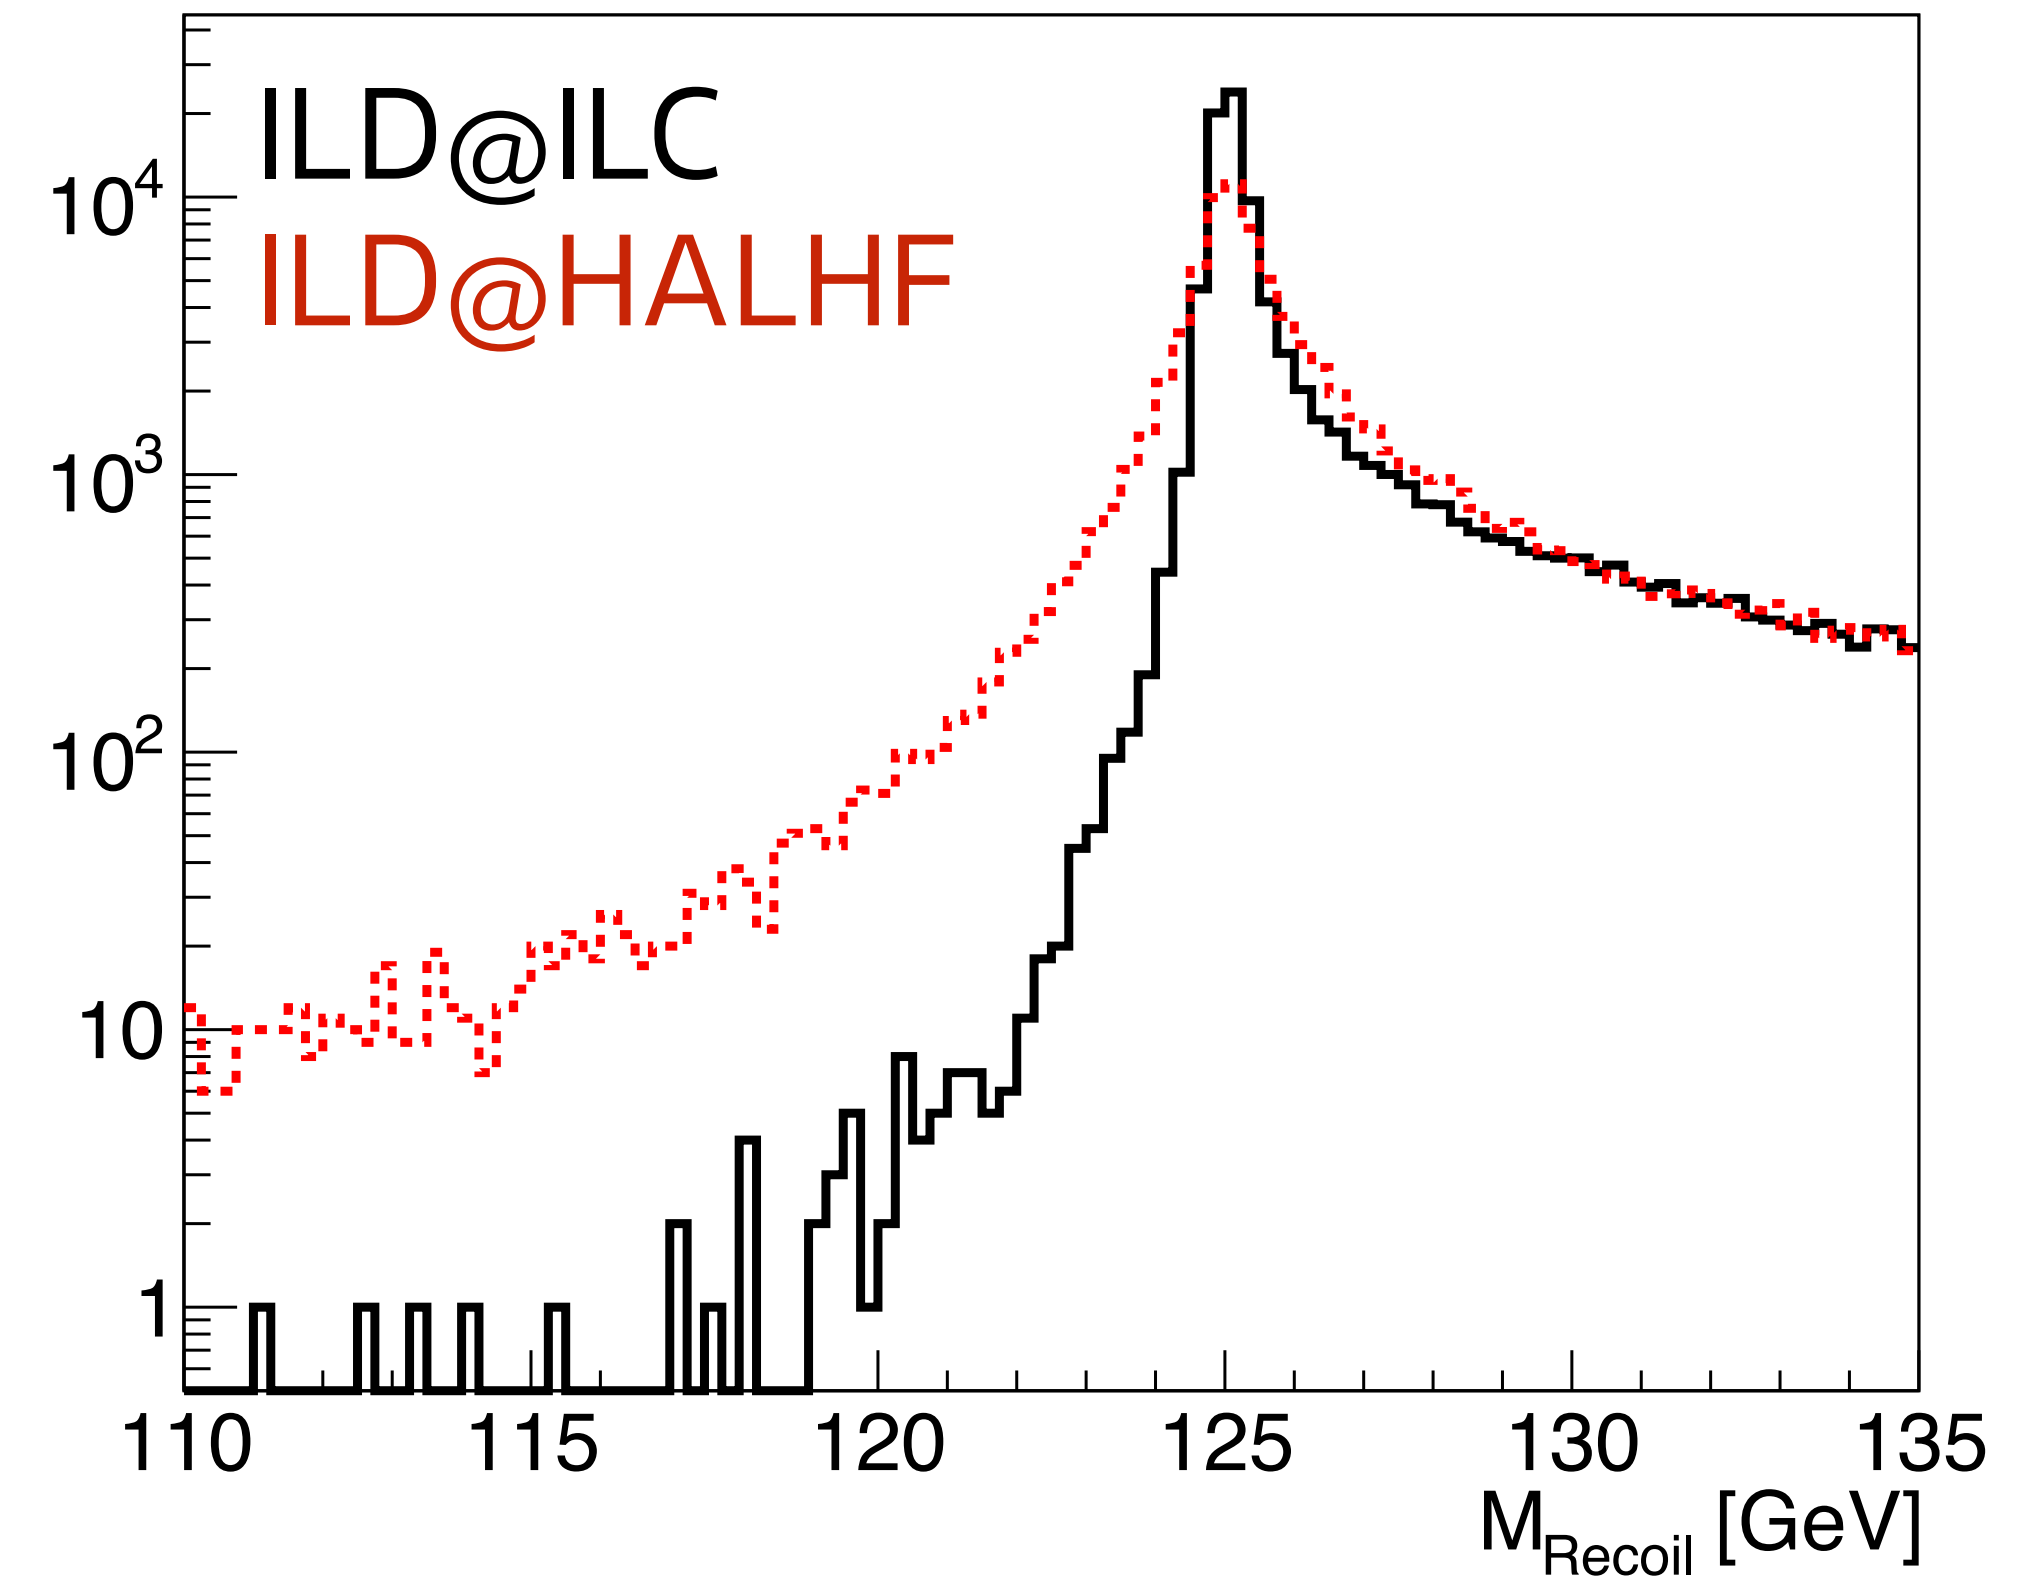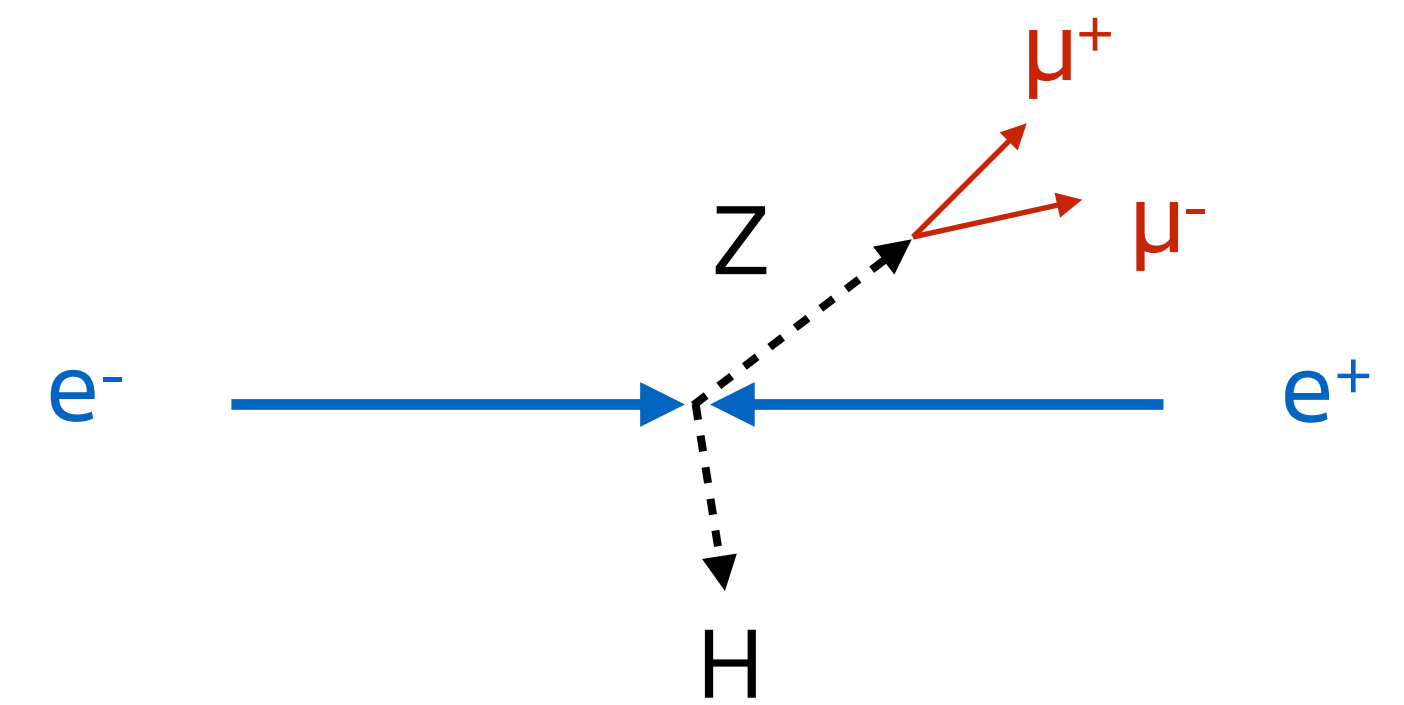


Impact on physics: Higgs

- Process: $e^+e^- \rightarrow Z(\mu^+\mu^-)H$
- Measure Higgs mass via recoil mass.
- Detector: ILD with fast simulation (SGV), including correct tracking.
- **Resolution loss due muons being boosted forward:**
 - less lever arm => lower muon momentum resolution.
 - $\sigma_{\text{ILD@HALHF}} = 2.2 \times \sigma_{\text{ILD@ILC}}$
- Mitigation: **extend the barrel in the forward region!**
 - $\sigma_{\text{e-ILD@HALHF}} = 1.2 \times \sigma_{\text{ILD@ILC}}$
 - => loss of only 20% on recoil mass.

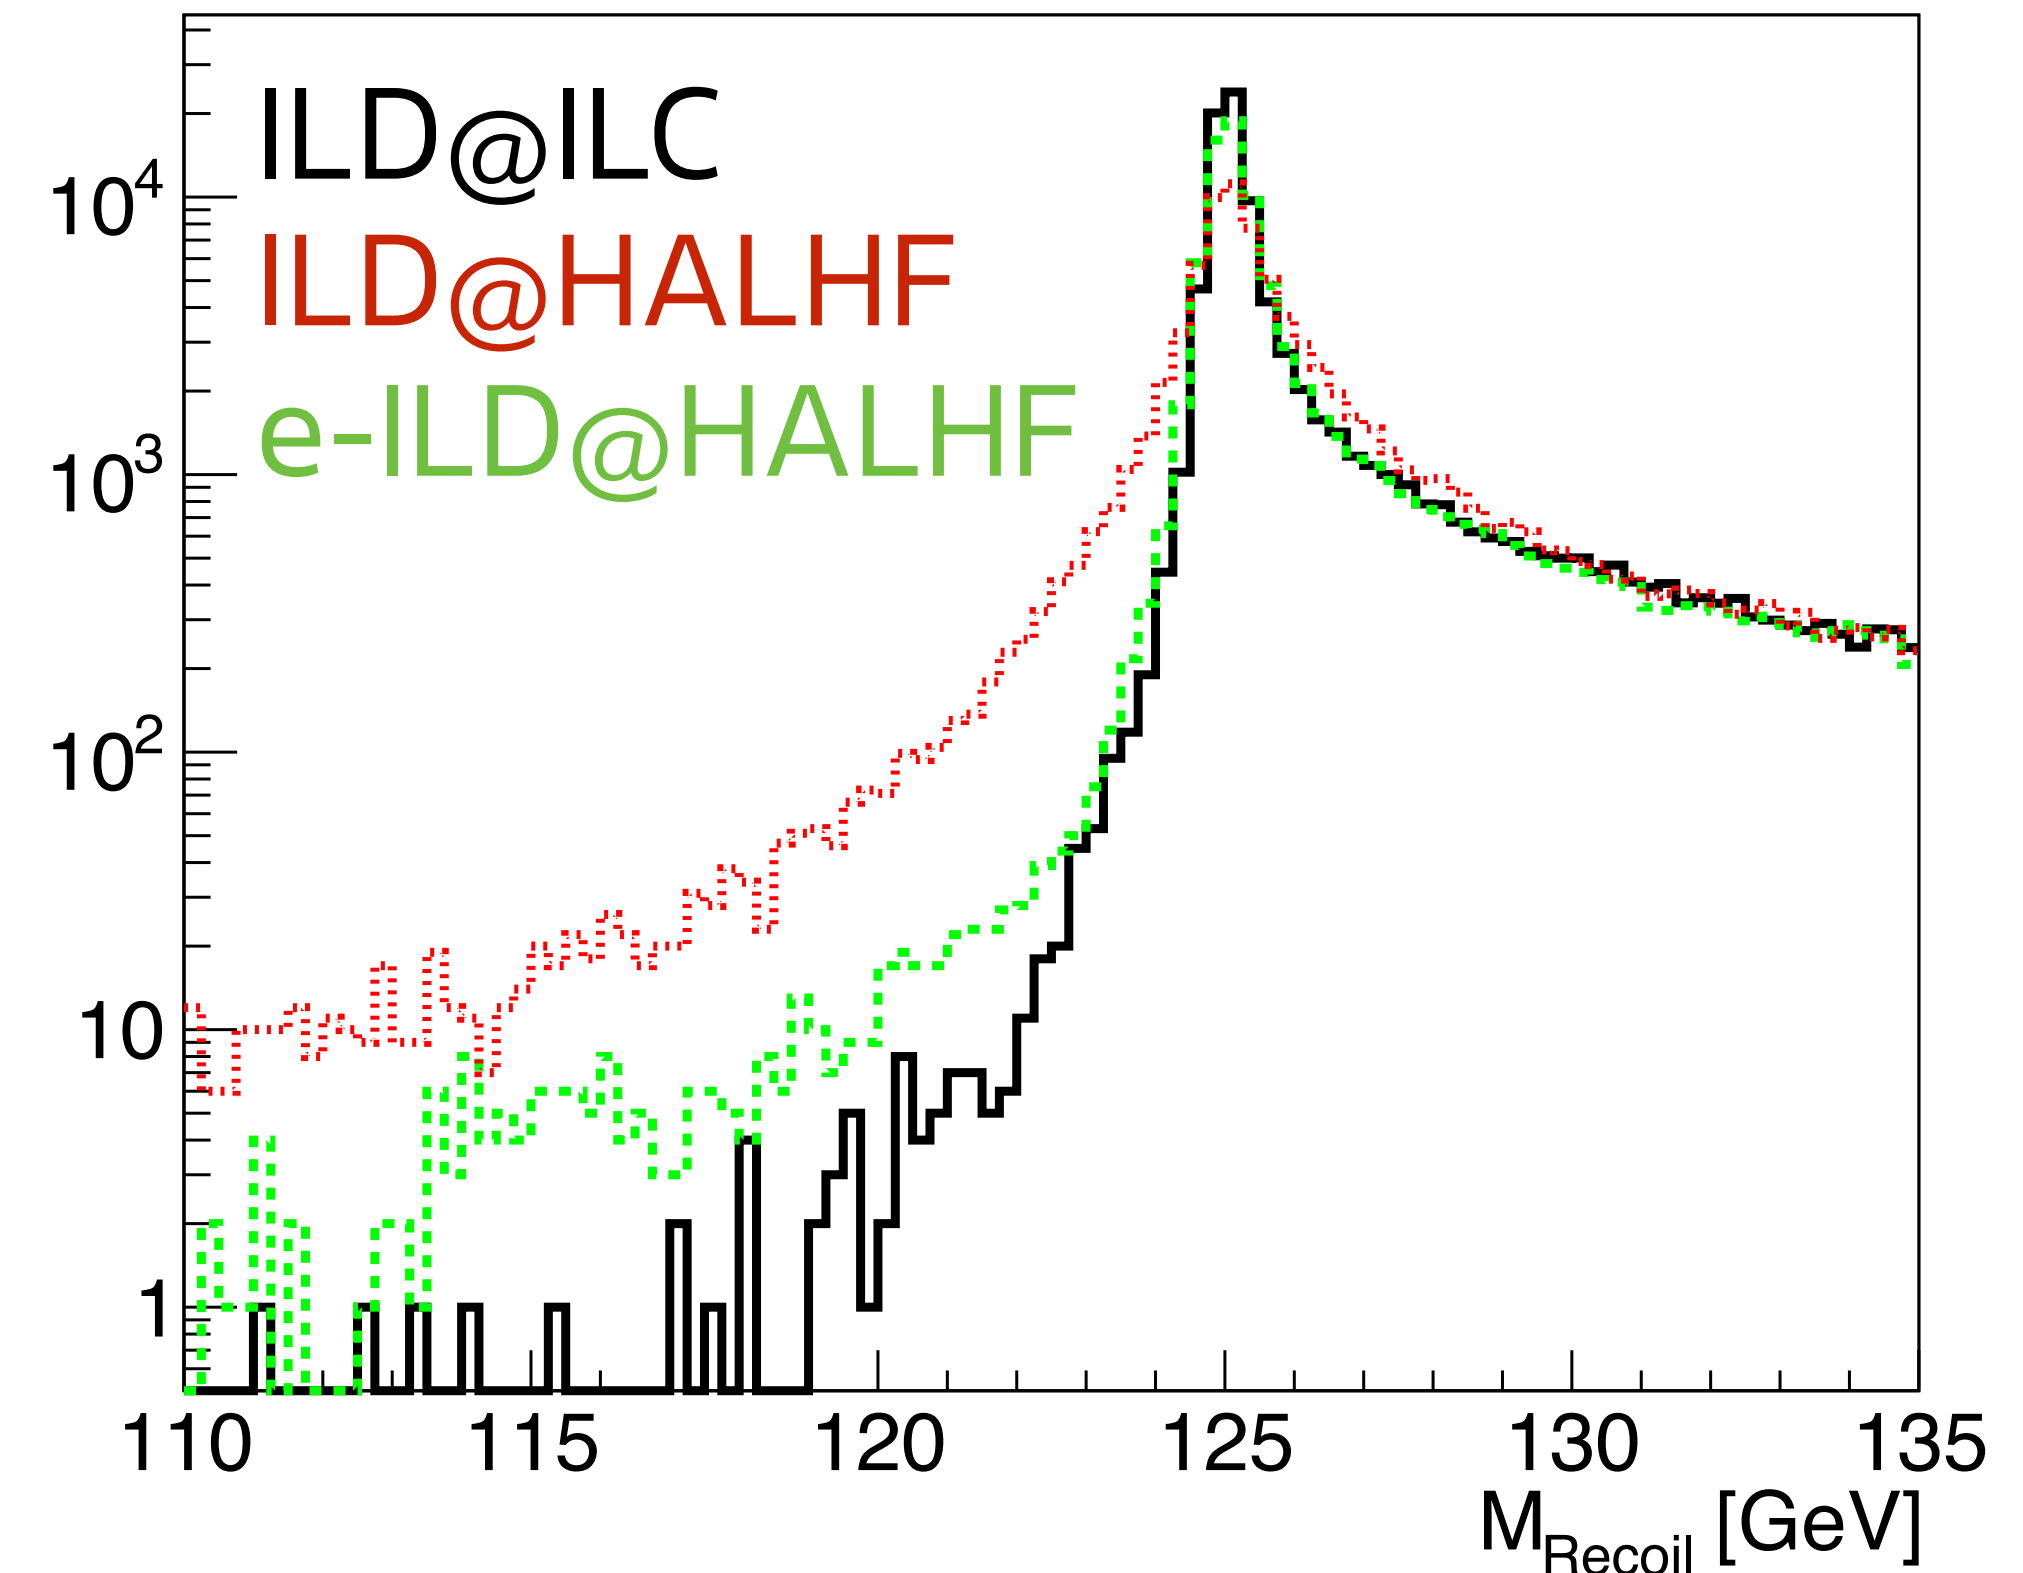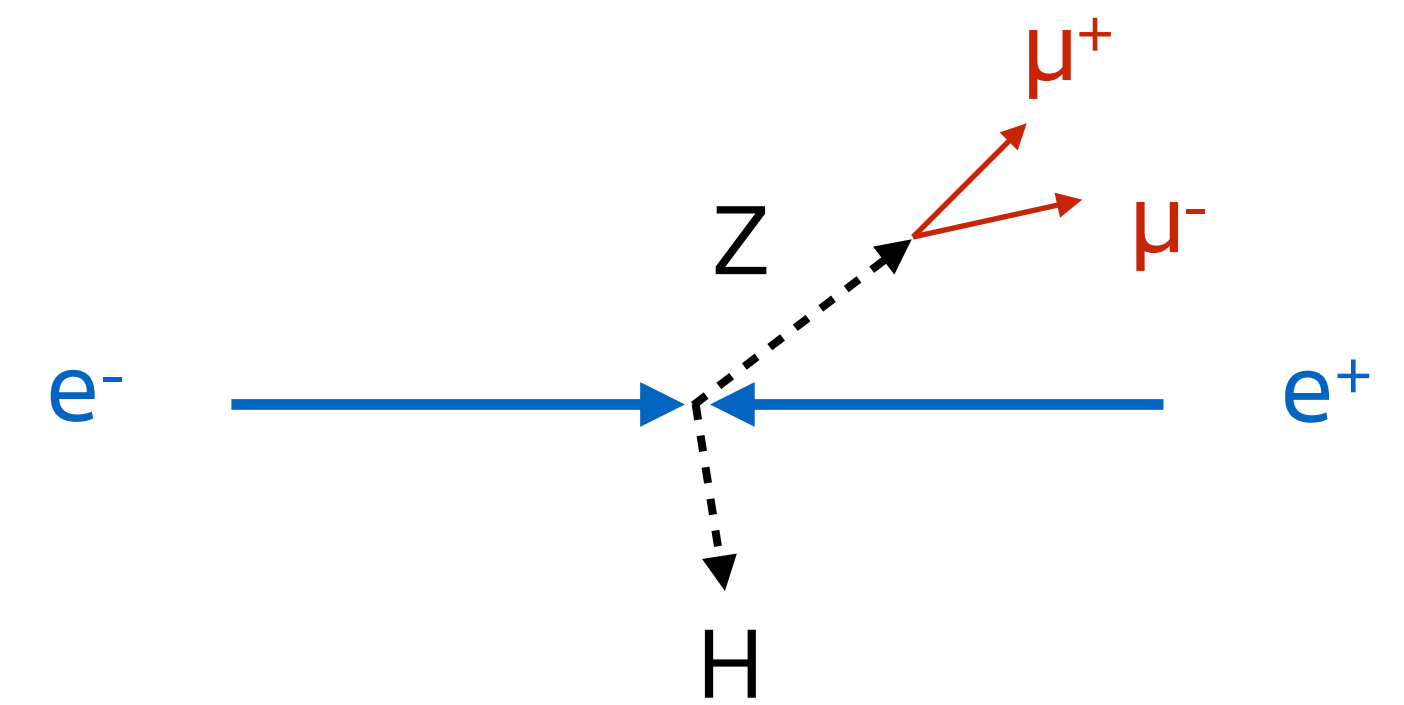



Impact on physics: F/B asymmetry

- Process: $e^+e^- \rightarrow \mu^+\mu^-$
 - [black] ILD@ILC
 - [red] extended ILD @ HALHF

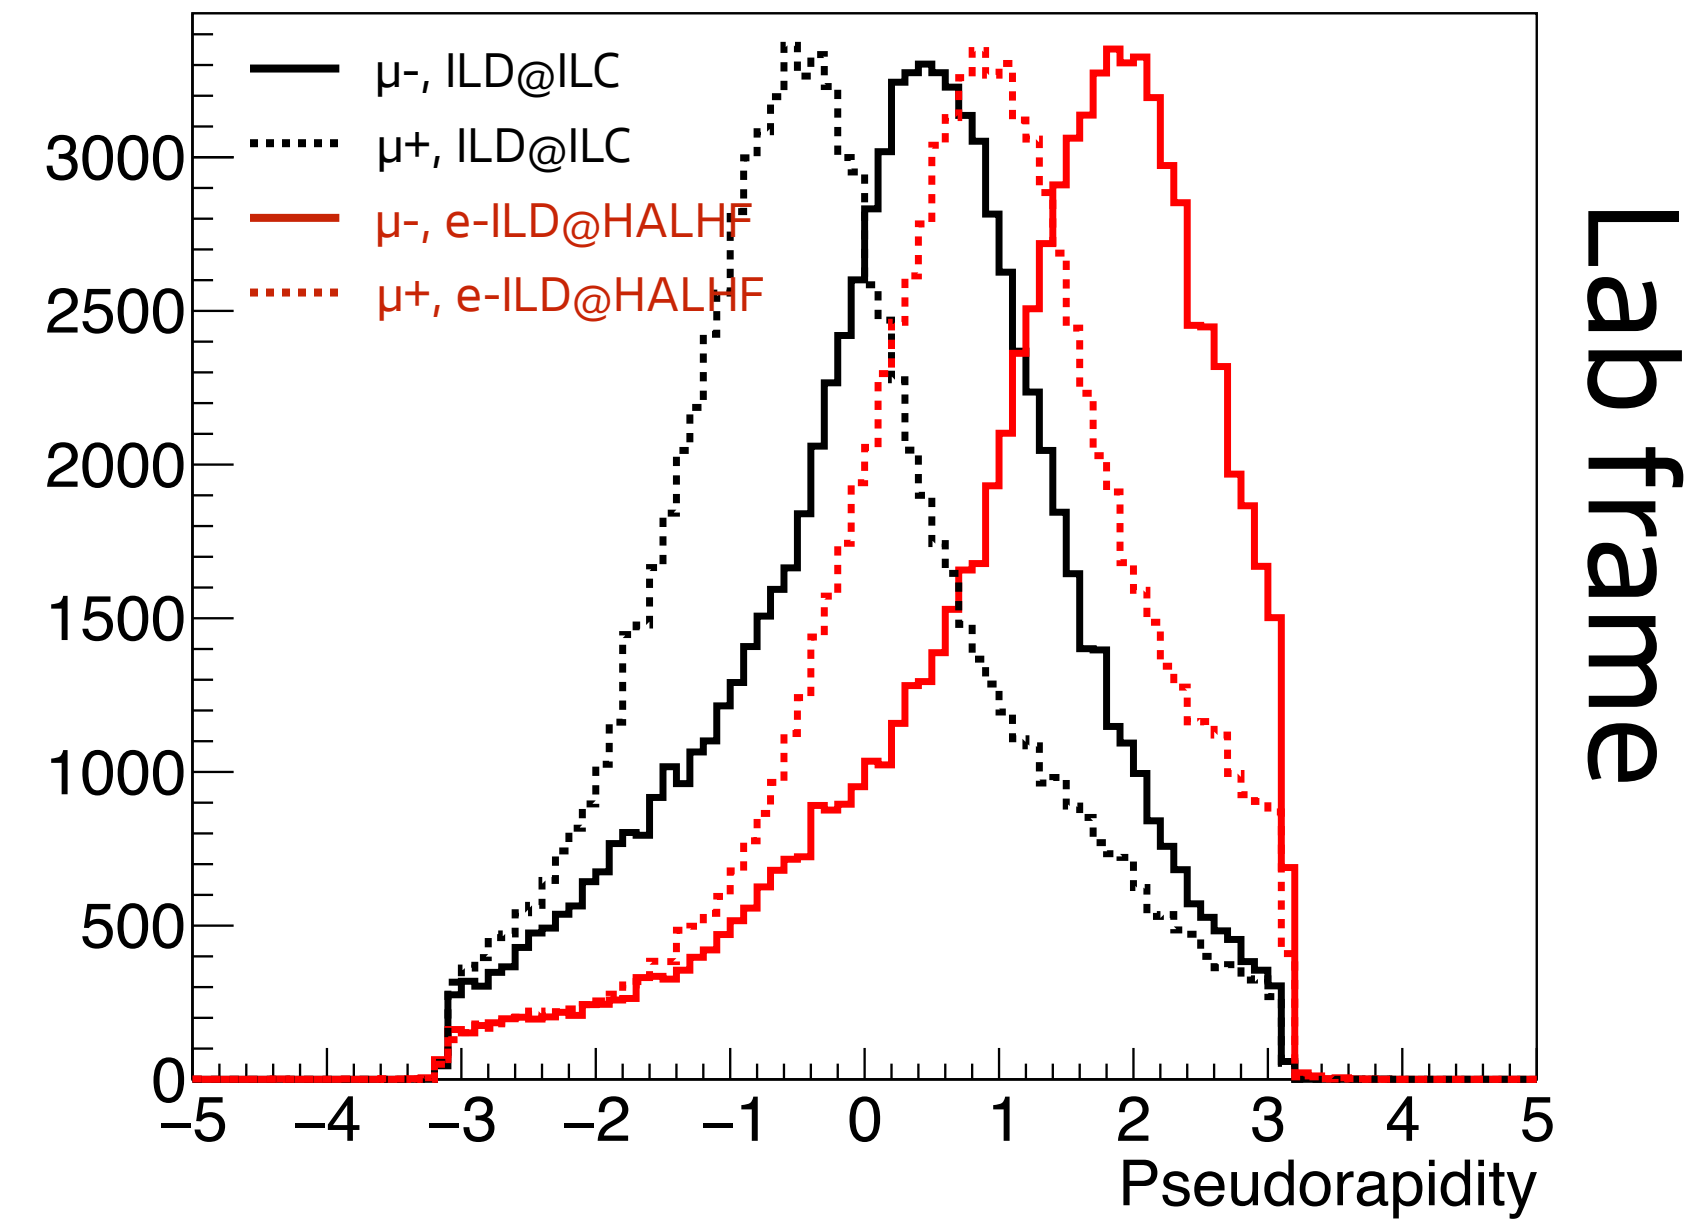

Impact on physics: F/B asymmetry

- Process: $e^+e^- \rightarrow \mu^+\mu^-$
 - [black] ILD@ILC
 - [red] extended ILD @ HALHF
- Move to the CM frame to ease the comparison:
 - Core of distribution is the same (as expected)
 - **Tail extends on one side and is cut on the other.**
- Lose on one side, but gain on the other.
- => **Need more studies, especially for systematic uncertainties** (since setup itself is asymmetric).

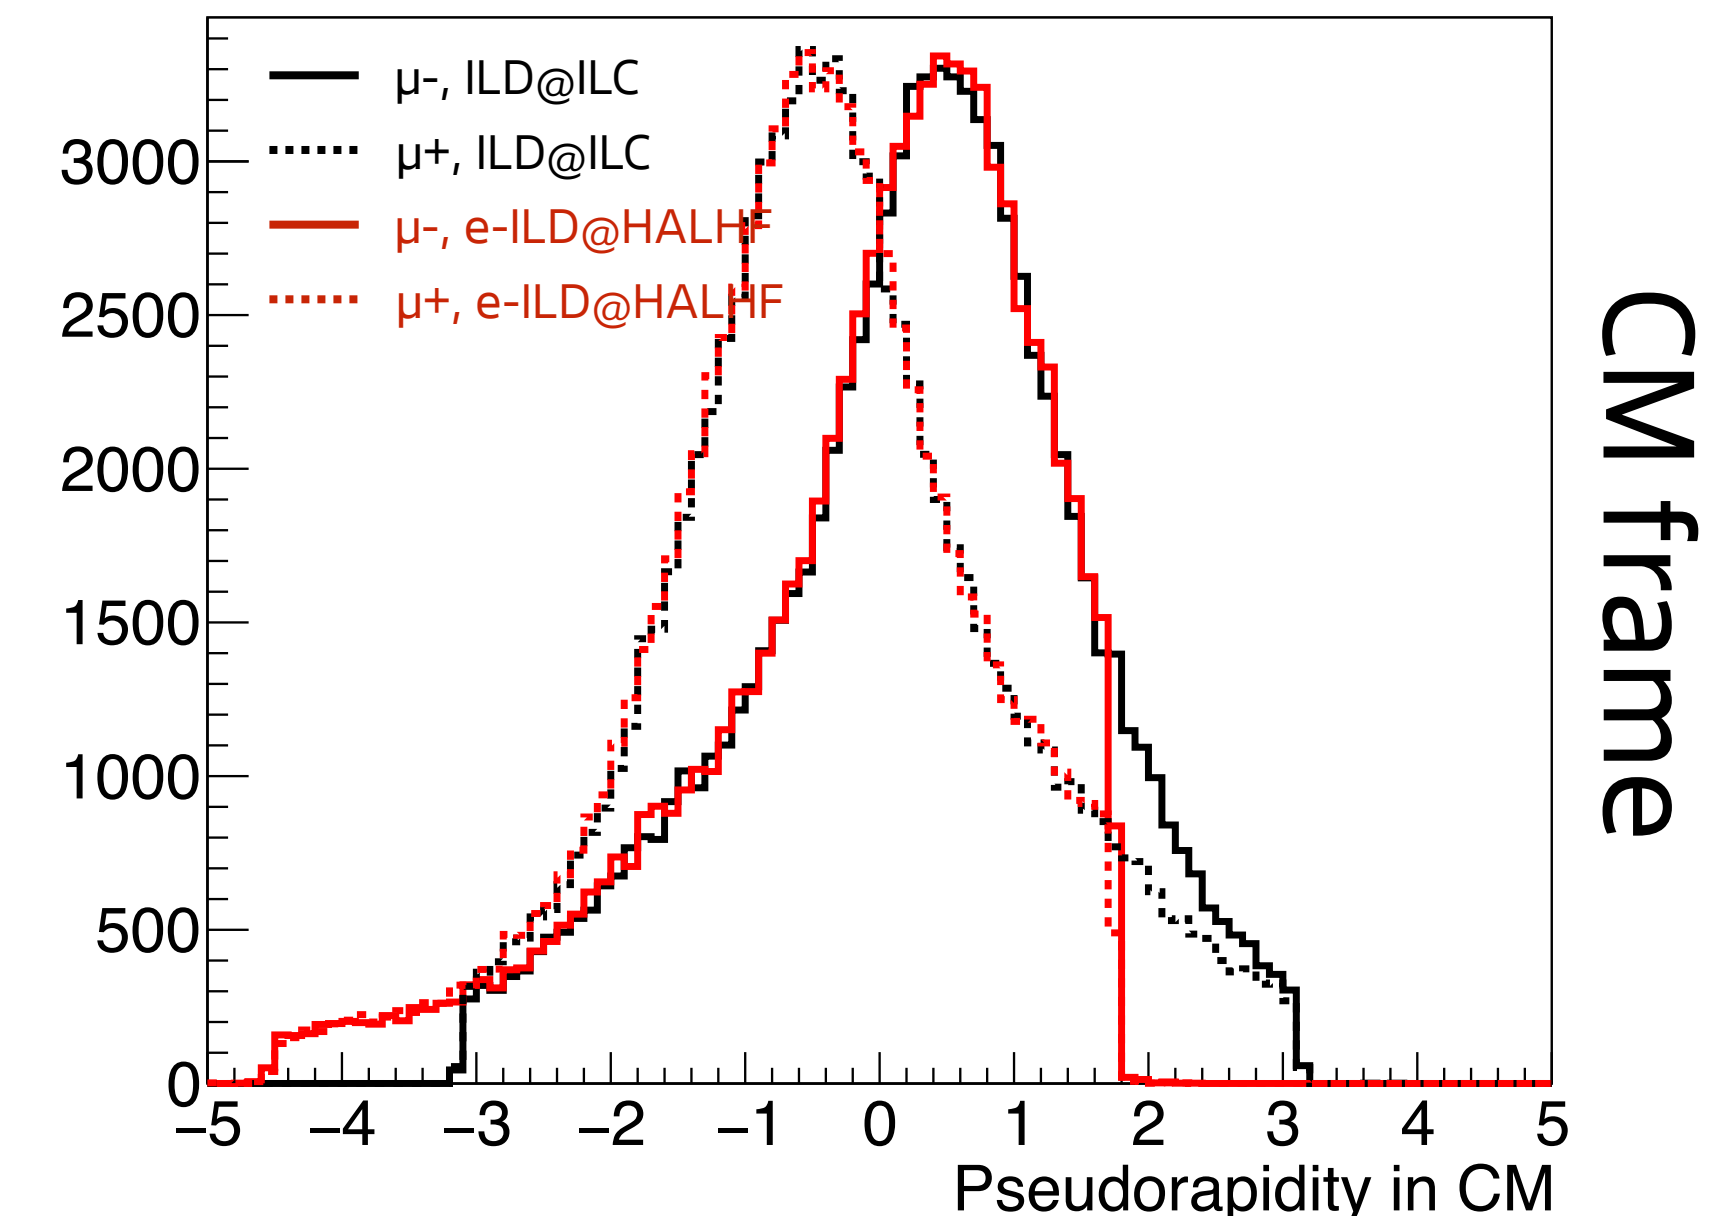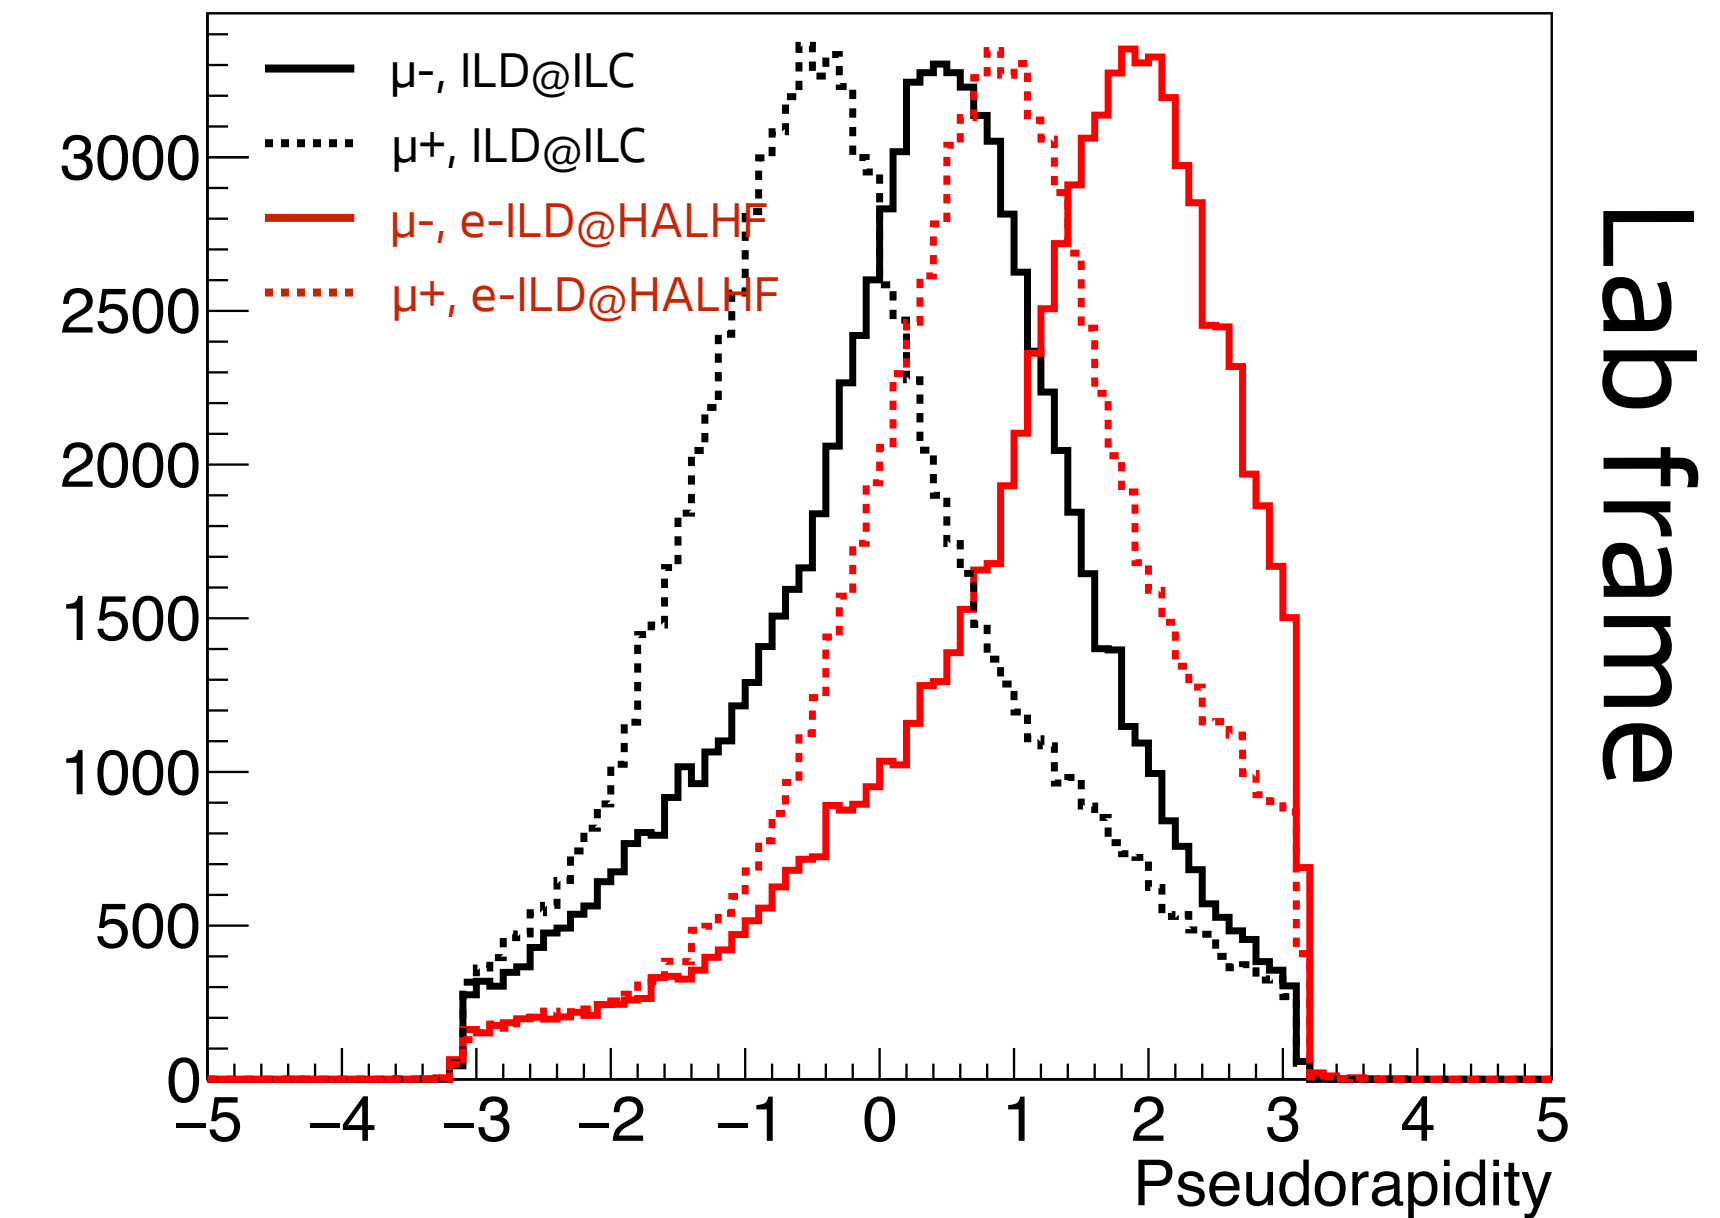

Power efficiency

The asymmetry strikes back

- **Asymmetric energy => loss of "energy efficiency"** compared to symmetric case (some energy goes in the boost)

- $$\frac{P}{P_{\text{sym}}} = \frac{E_- N_- + E_+ N_+}{\sqrt{N_- N_+} \sqrt{s}}$$

- With:

- $E_- = 500 \text{ GeV}$ and $E_+ = 31 \text{ GeV}$,
 - $N_- : N_+ = 2 : 2 \times 10^{10}$ particles / bunch, } $P/P_{\text{sym}} = 2.13$ (= *boost factor*)

Power efficiency

The asymmetry strikes back

- **Asymmetric energy => loss of "energy efficiency"** compared to symmetric case (some energy goes in the boost)

- $$\frac{P}{P_{\text{sym}}} = \frac{E_- N_- + E_+ N_+}{\sqrt{N_- N_+} \sqrt{s}}$$

- With:

- $E_- = 500 \text{ GeV}$ and $E_+ = 31 \text{ GeV}$,
 - $N_- : N_+ = 2 : 2 \times 10^{10}$ particles / bunch, } $P/P_{\text{sym}} = 2.13$ (= boost factor)

- But what matters is **luminosity** $\mathcal{L} \propto N_- \times N_+ \Rightarrow$ **same \mathcal{L} while being more efficient** by:
 - decreasing the bunch charge of the high-energy beam (e-)
 - and increasing the bunch charge of the low-energy beam (e+).

Power efficiency

The asymmetry strikes back

- **Asymmetric energy => loss of "energy efficiency"** compared to symmetric case (some energy goes in the boost)

- $$\frac{P}{P_{\text{sym}}} = \frac{E_- N_- + E_+ N_+}{\sqrt{N_- N_+} \sqrt{s}}$$

- With:



- $E_- = 500 \text{ GeV}$ and $E_+ = 31 \text{ GeV}$,
 - $N_- : N_+ = 2 : 2 \times 10^{10}$ particles / bunch, } $P/P_{\text{sym}} = 2.13$ (= boost factor)

- But what matters is **luminosity** $\mathcal{L} \propto N_- \times N_+ \Rightarrow$ **same \mathcal{L} while being more efficient** by:
 - decreasing the bunch charge of the high-energy beam (e-)
 - and increasing the bunch charge of the low-energy beam (e+).
- Ideally by the opposite factor as energy asymmetry.
- **Limited by beam-induced background** (see next slides):
 - $N_- : N_+ = 1.33 : 3 \times 10^{10}$ particles / bunch $\Rightarrow P/P_{\text{sym}} = 1.5$

Beam-strahlung

Creation of many e^+e^- pairs...

e^- beam
high E, lower N

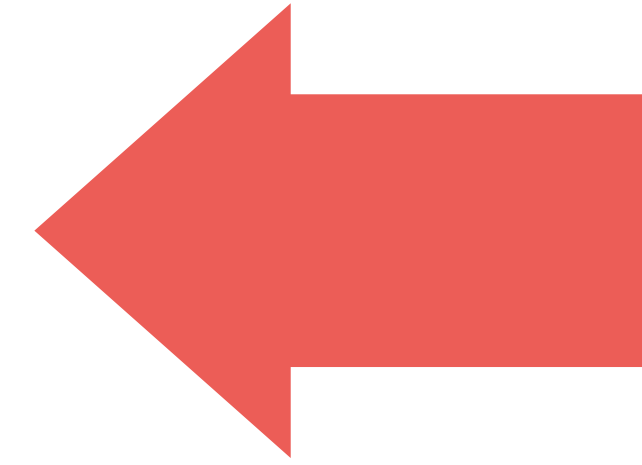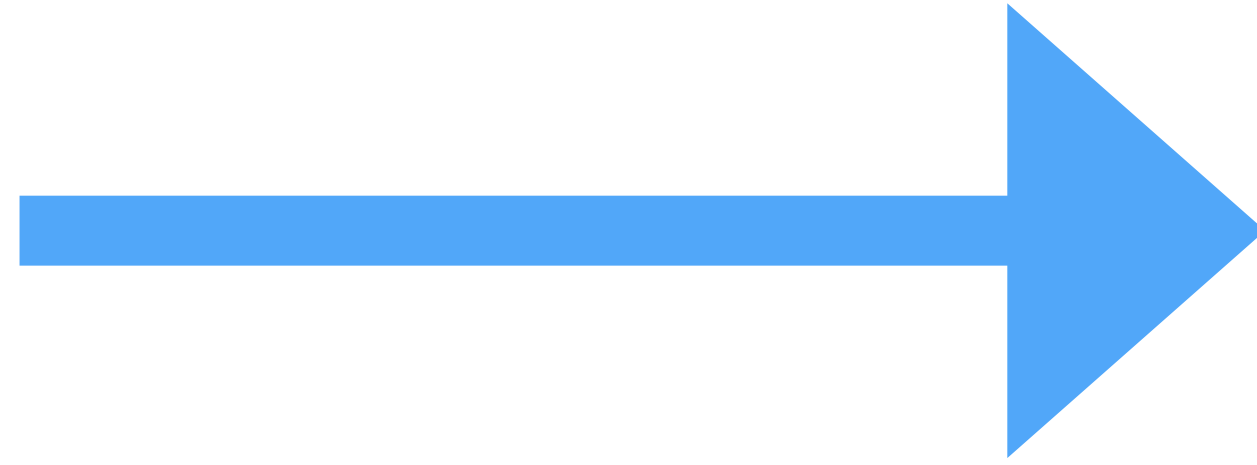


e^+ beam
lower E, high N

Beam-strahlung

Creation of many e^+e^- pairs...


e^- beam
high E, lower N

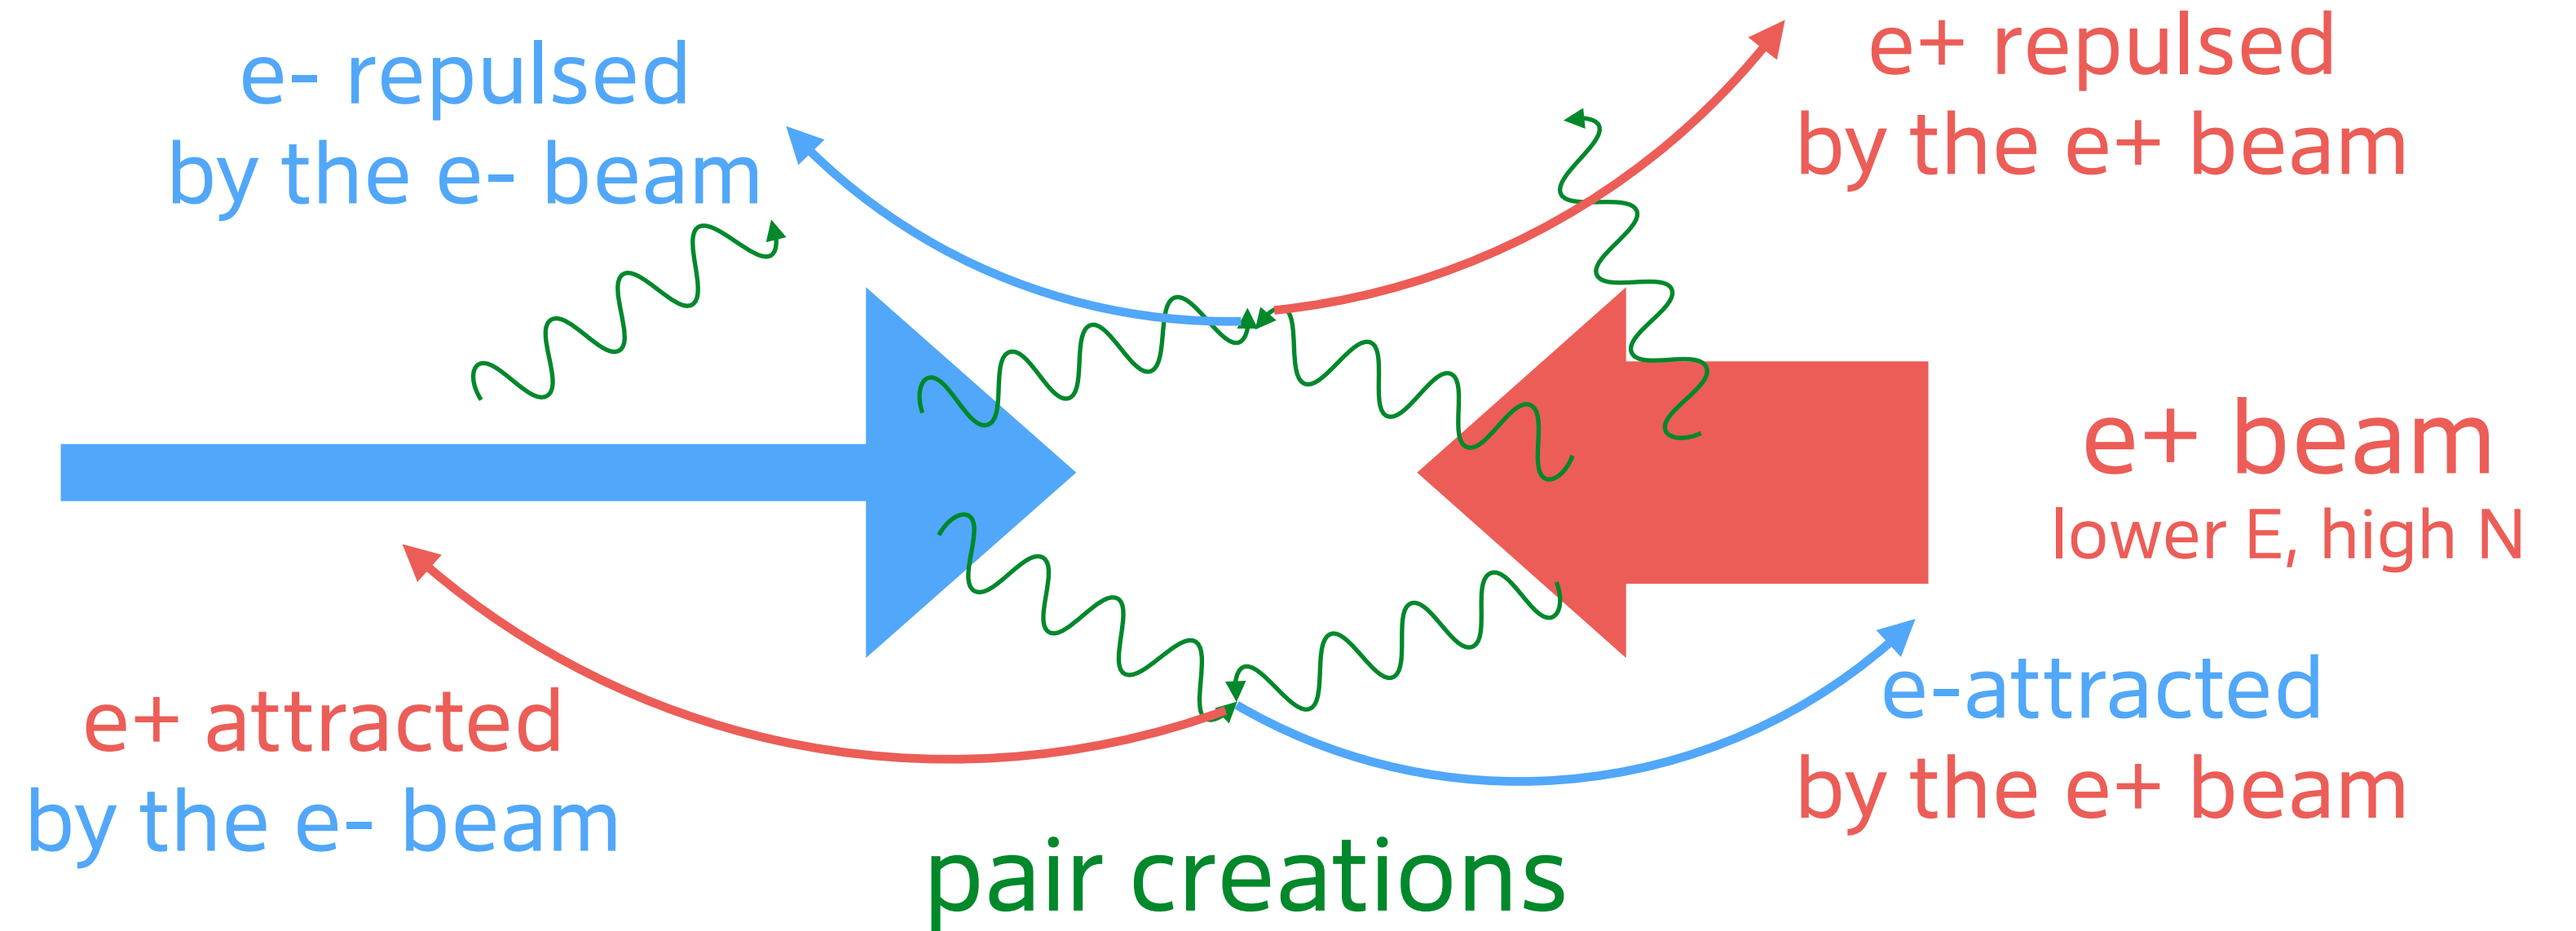

Beam-strahlung


Creation of many e^+e^- pairs...

e^- beam
high E, lower N

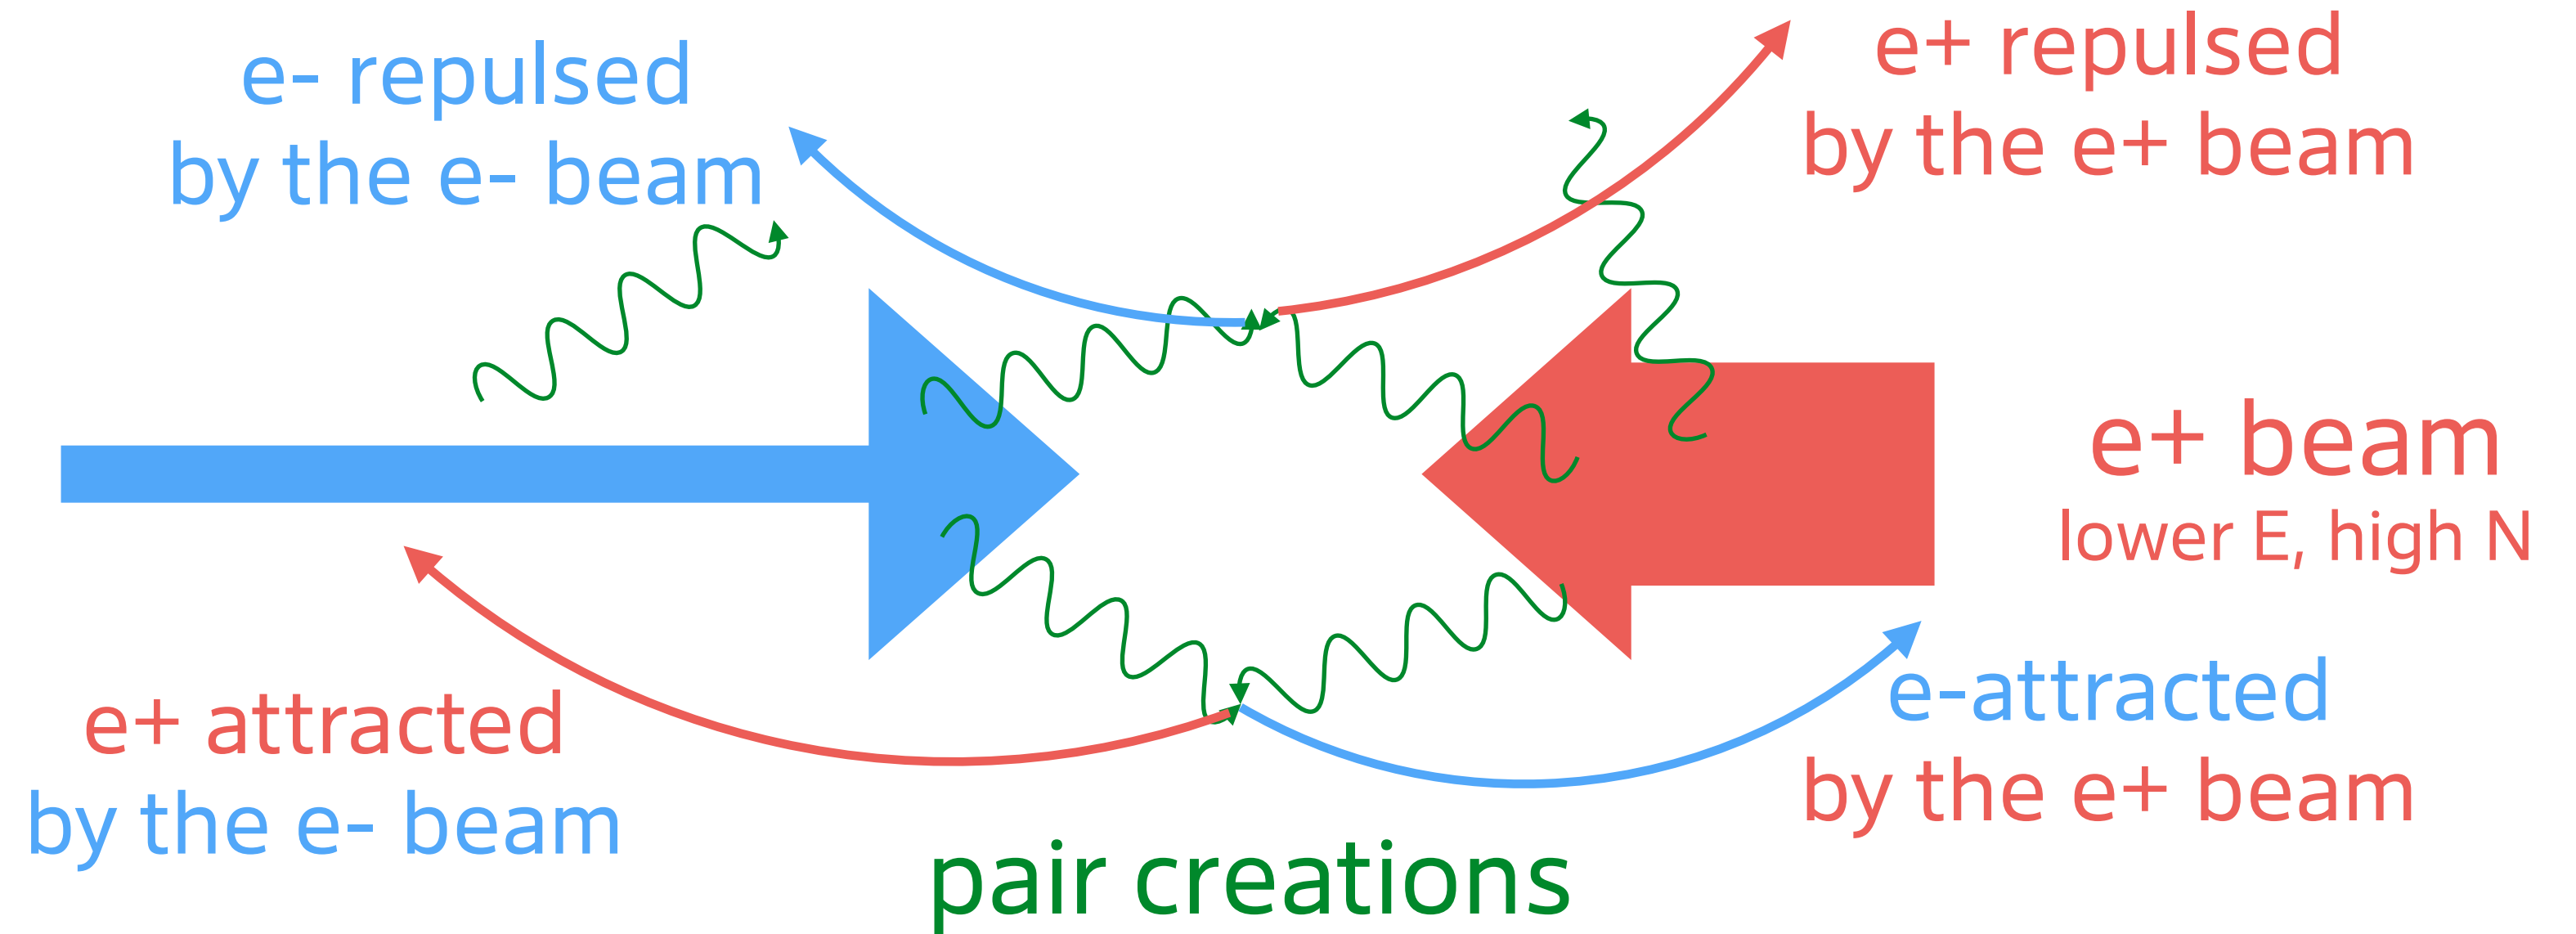

- Simulate the beam-beam interaction using Guinea-Pig.**


- Example: plot the trajectories of all pairs created in the forward direction.
- Here in the ILC configuration (symmetric beams)

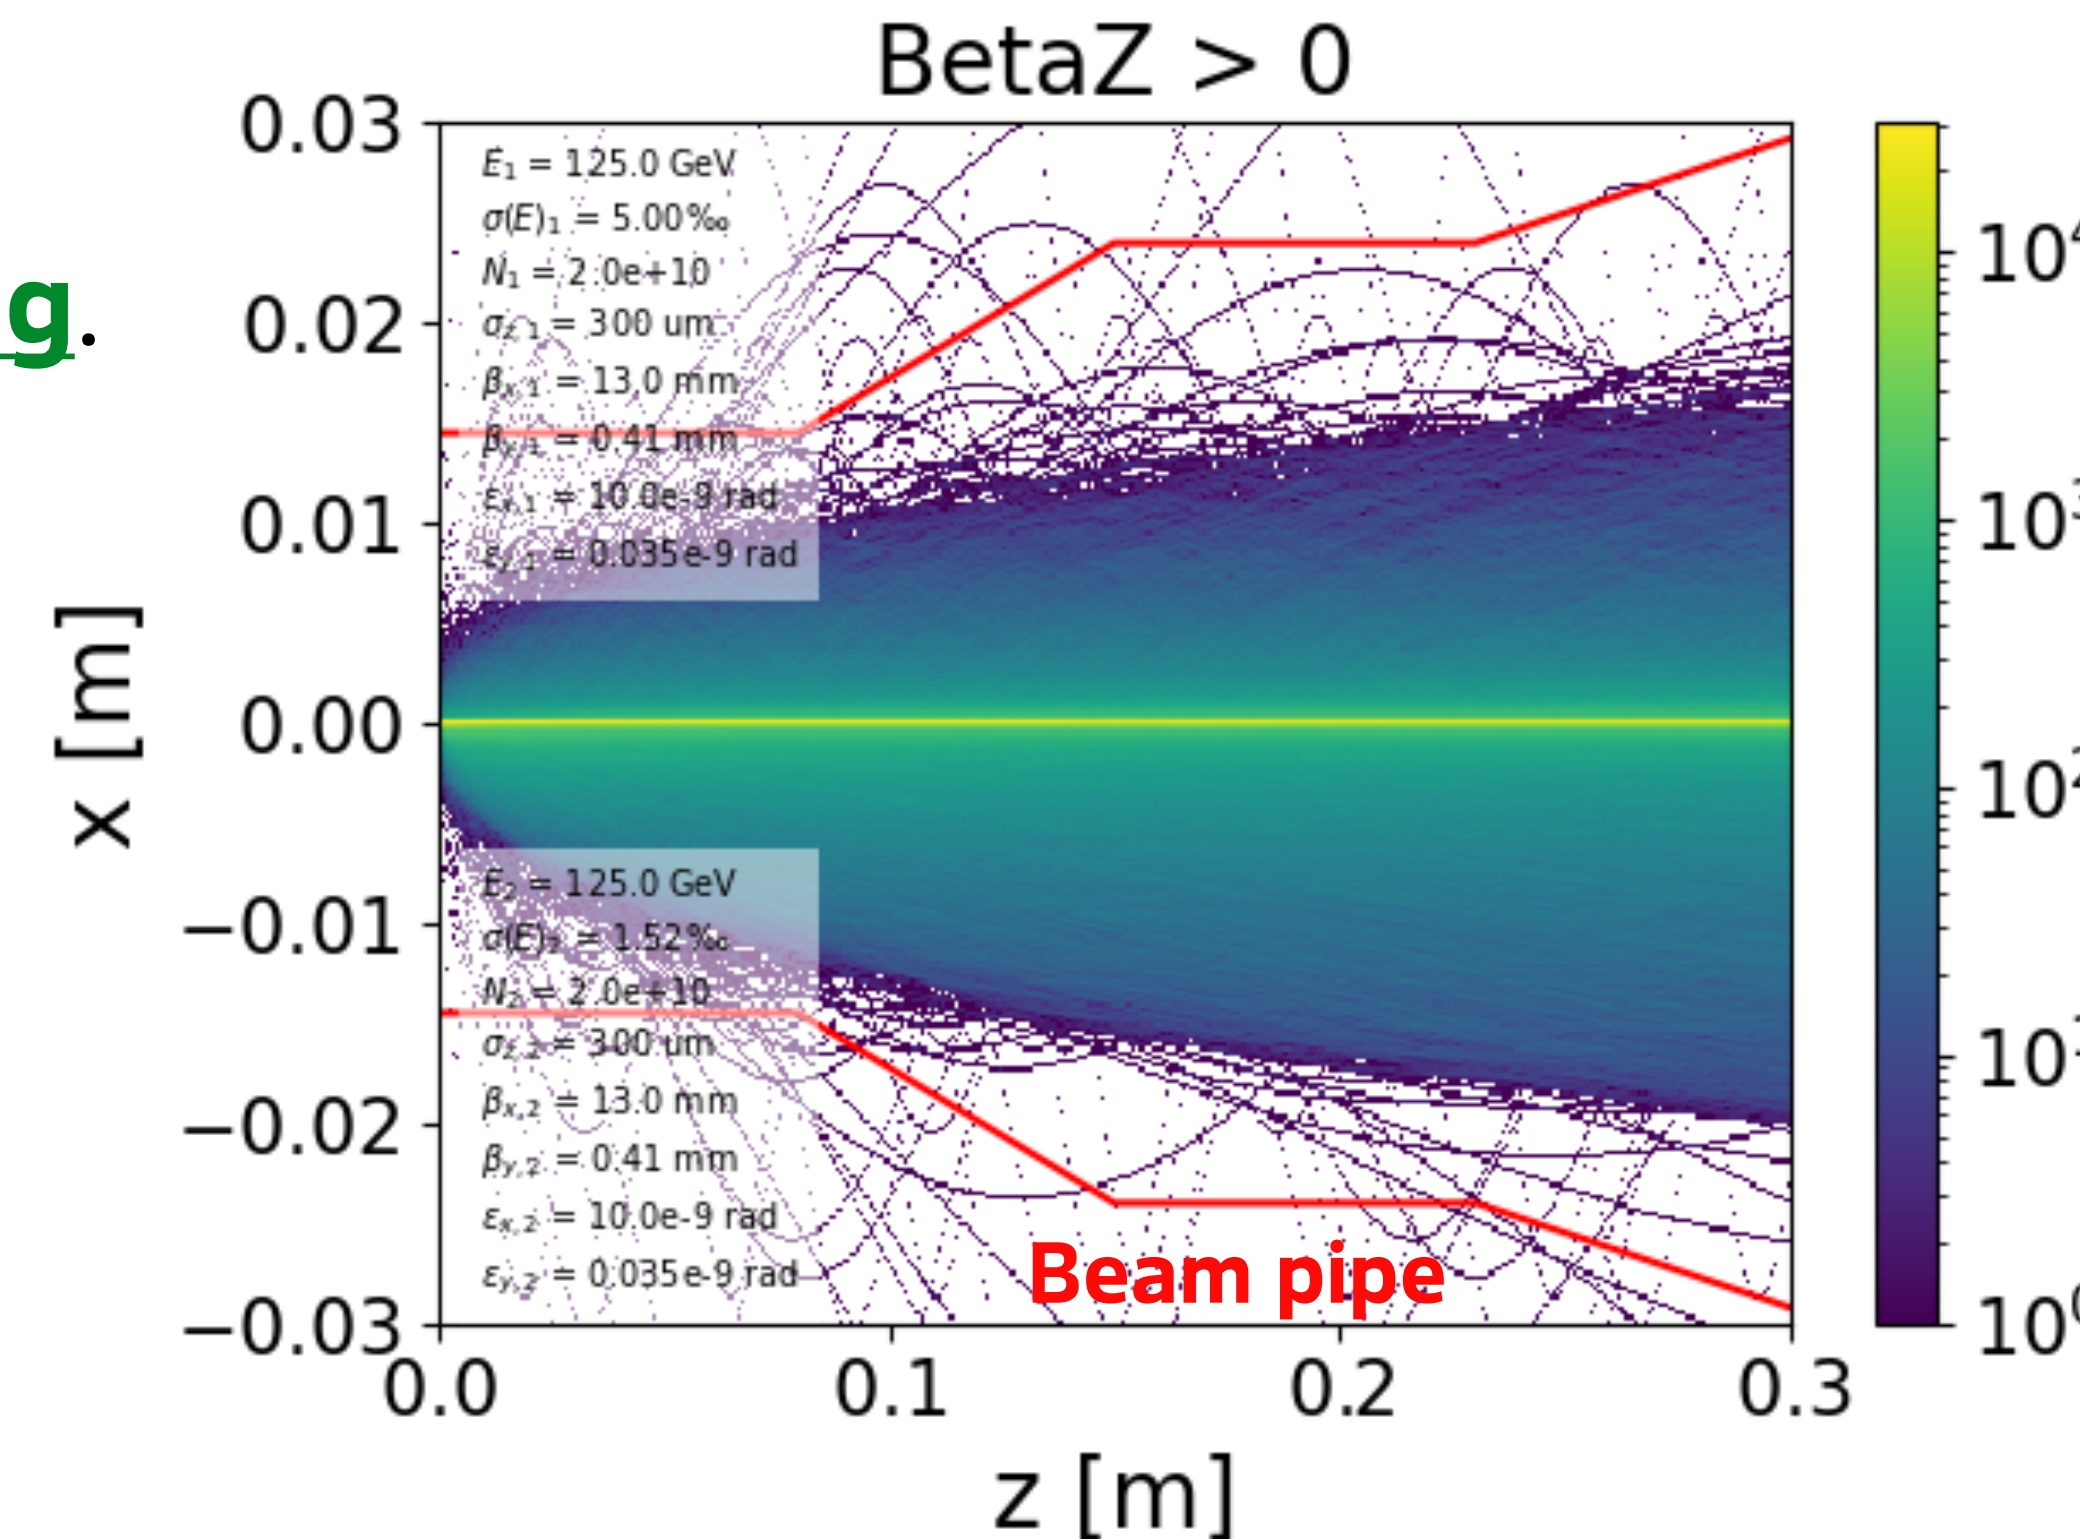

Beam-strahlung

Creation of many e^+e^- pairs...


e^- beam
high E, lower N

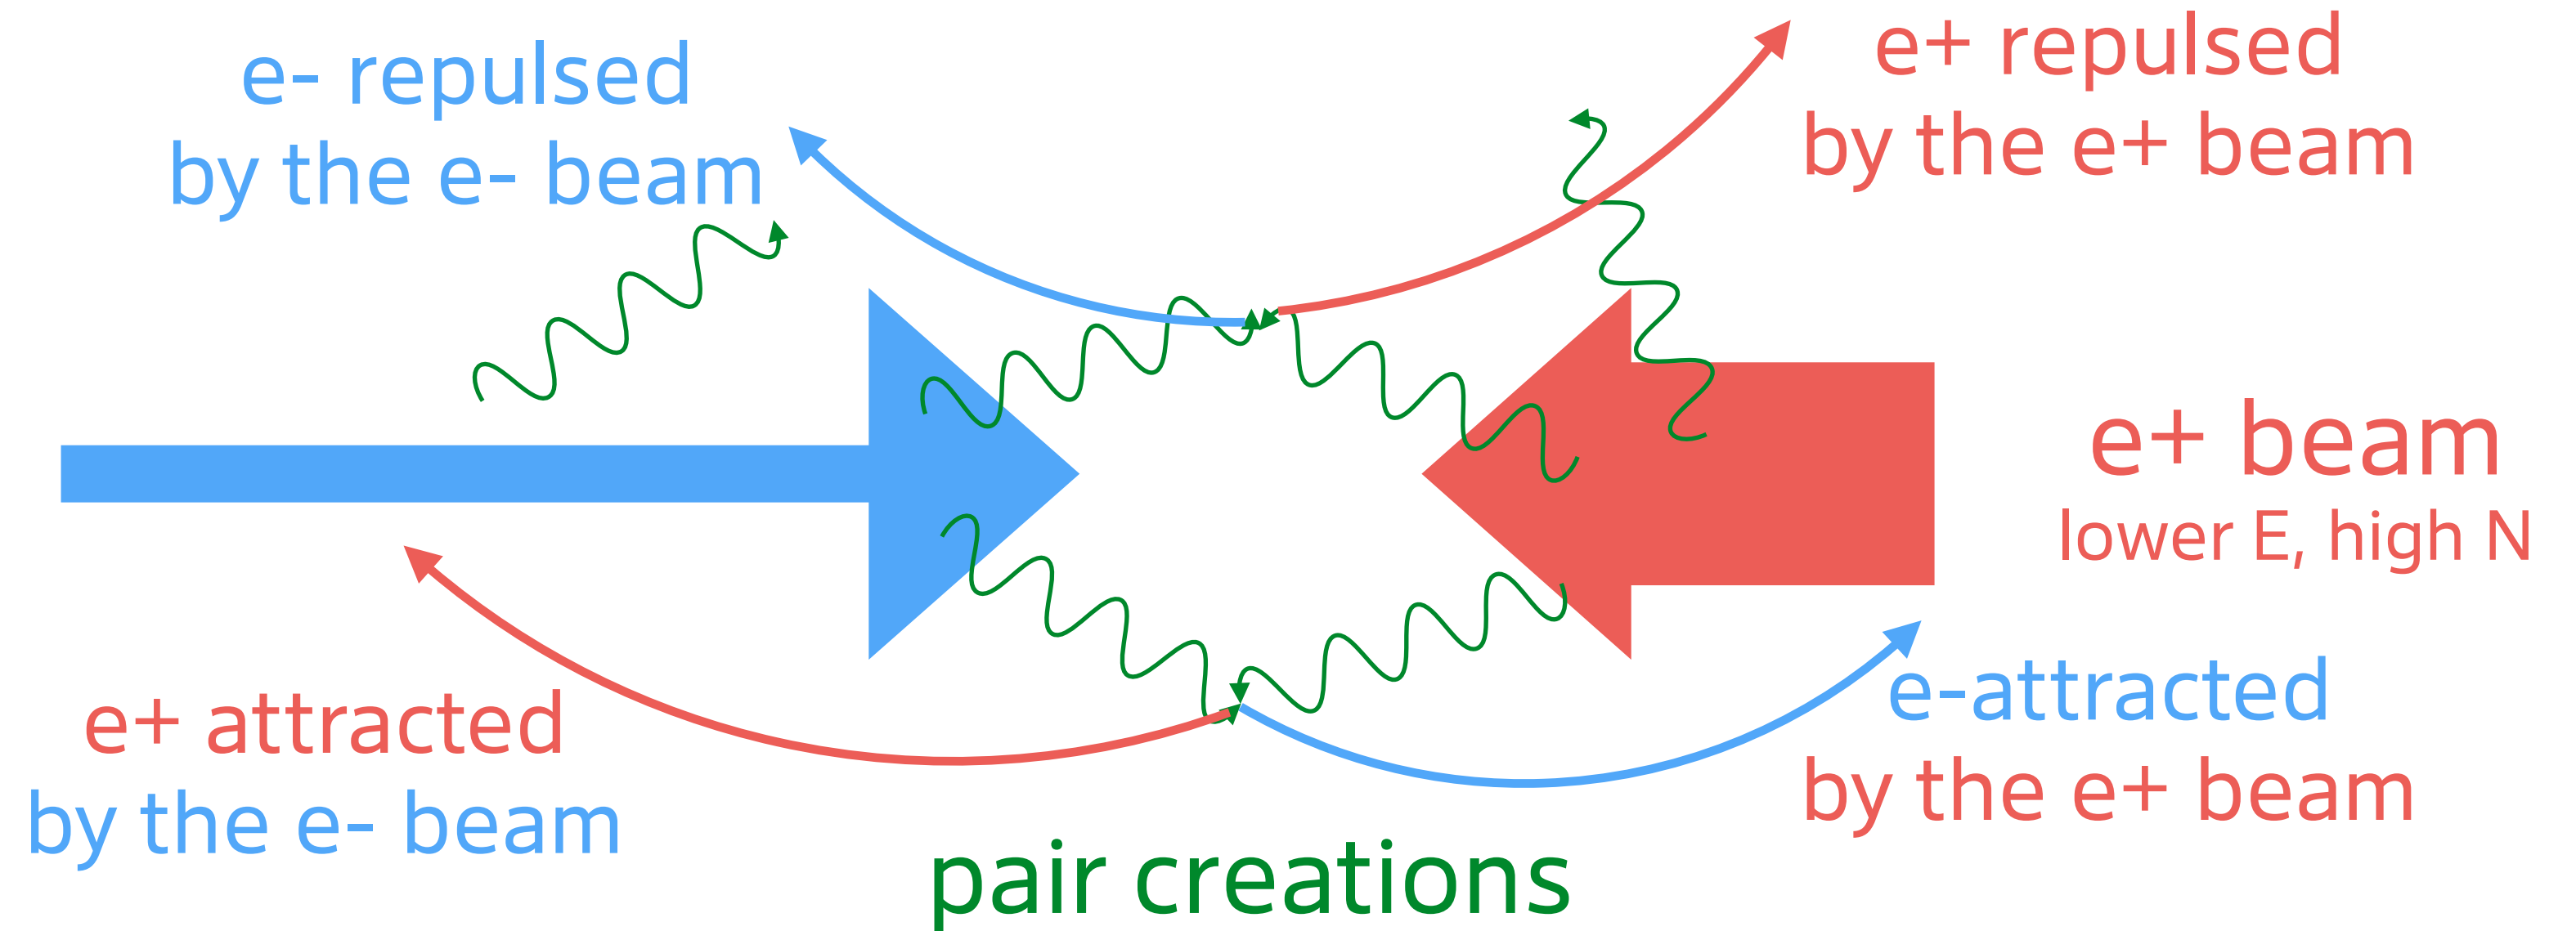

- **Simulate the beam-beam interaction using Guinea-Pig.**

- Example: plot the trajectories of all pairs created in the forward direction.
- Here in the ILC configuration (symmetric beams)

- This is ~ **independent of beam energy**, but rather **depends on the beam charge**.

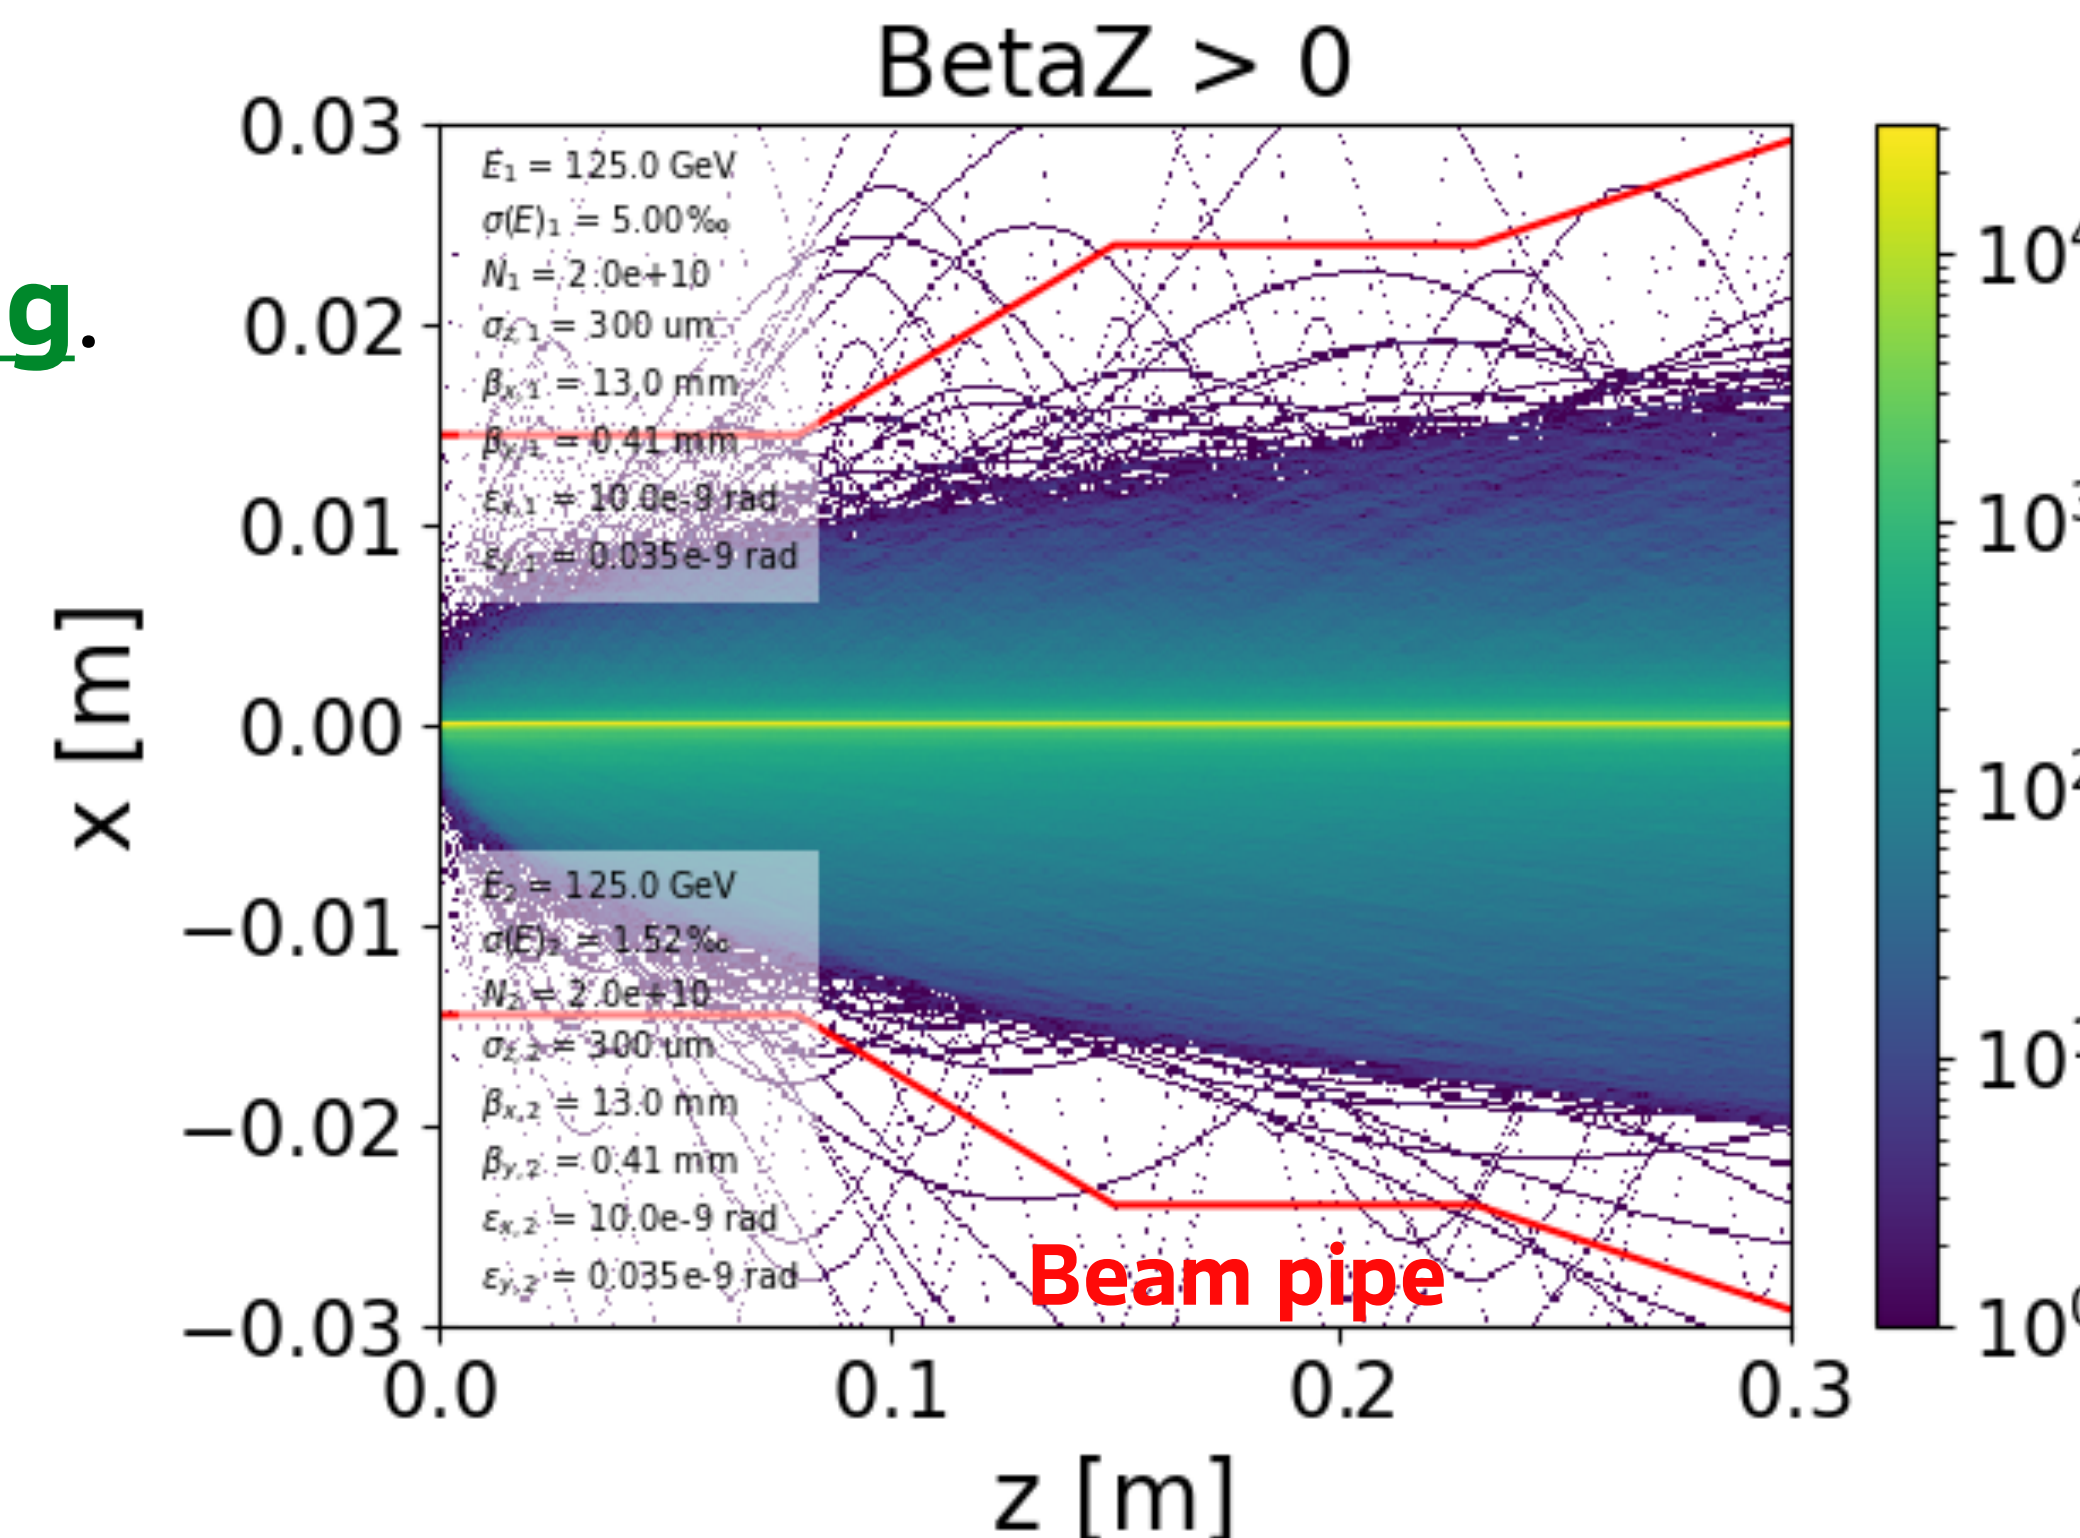

Beam-strahlung



Drawing the detector like you've never seen it!

- Usual representation of this effect:
 - Let a e^-/e^+ with given (p_T, θ) . This fully defines its trajectory (helix), for a given B field.
 - **If/Where does this helix hit the detector?** \Rightarrow "Hit map" in the (p_T, θ) space.

Beam-strahlung



Drawing the detector like you've never seen it!

- Usual representation of this effect:
 - Let a e^-/e^+ with given (p_T, θ) . This fully defines its trajectory (helix), for a given B field.
 - **If/Where does this helix hit the detector?** \Rightarrow "Hit map" in the (p_T, θ) space.
- What does the detector look like in the (p_T, θ) space?

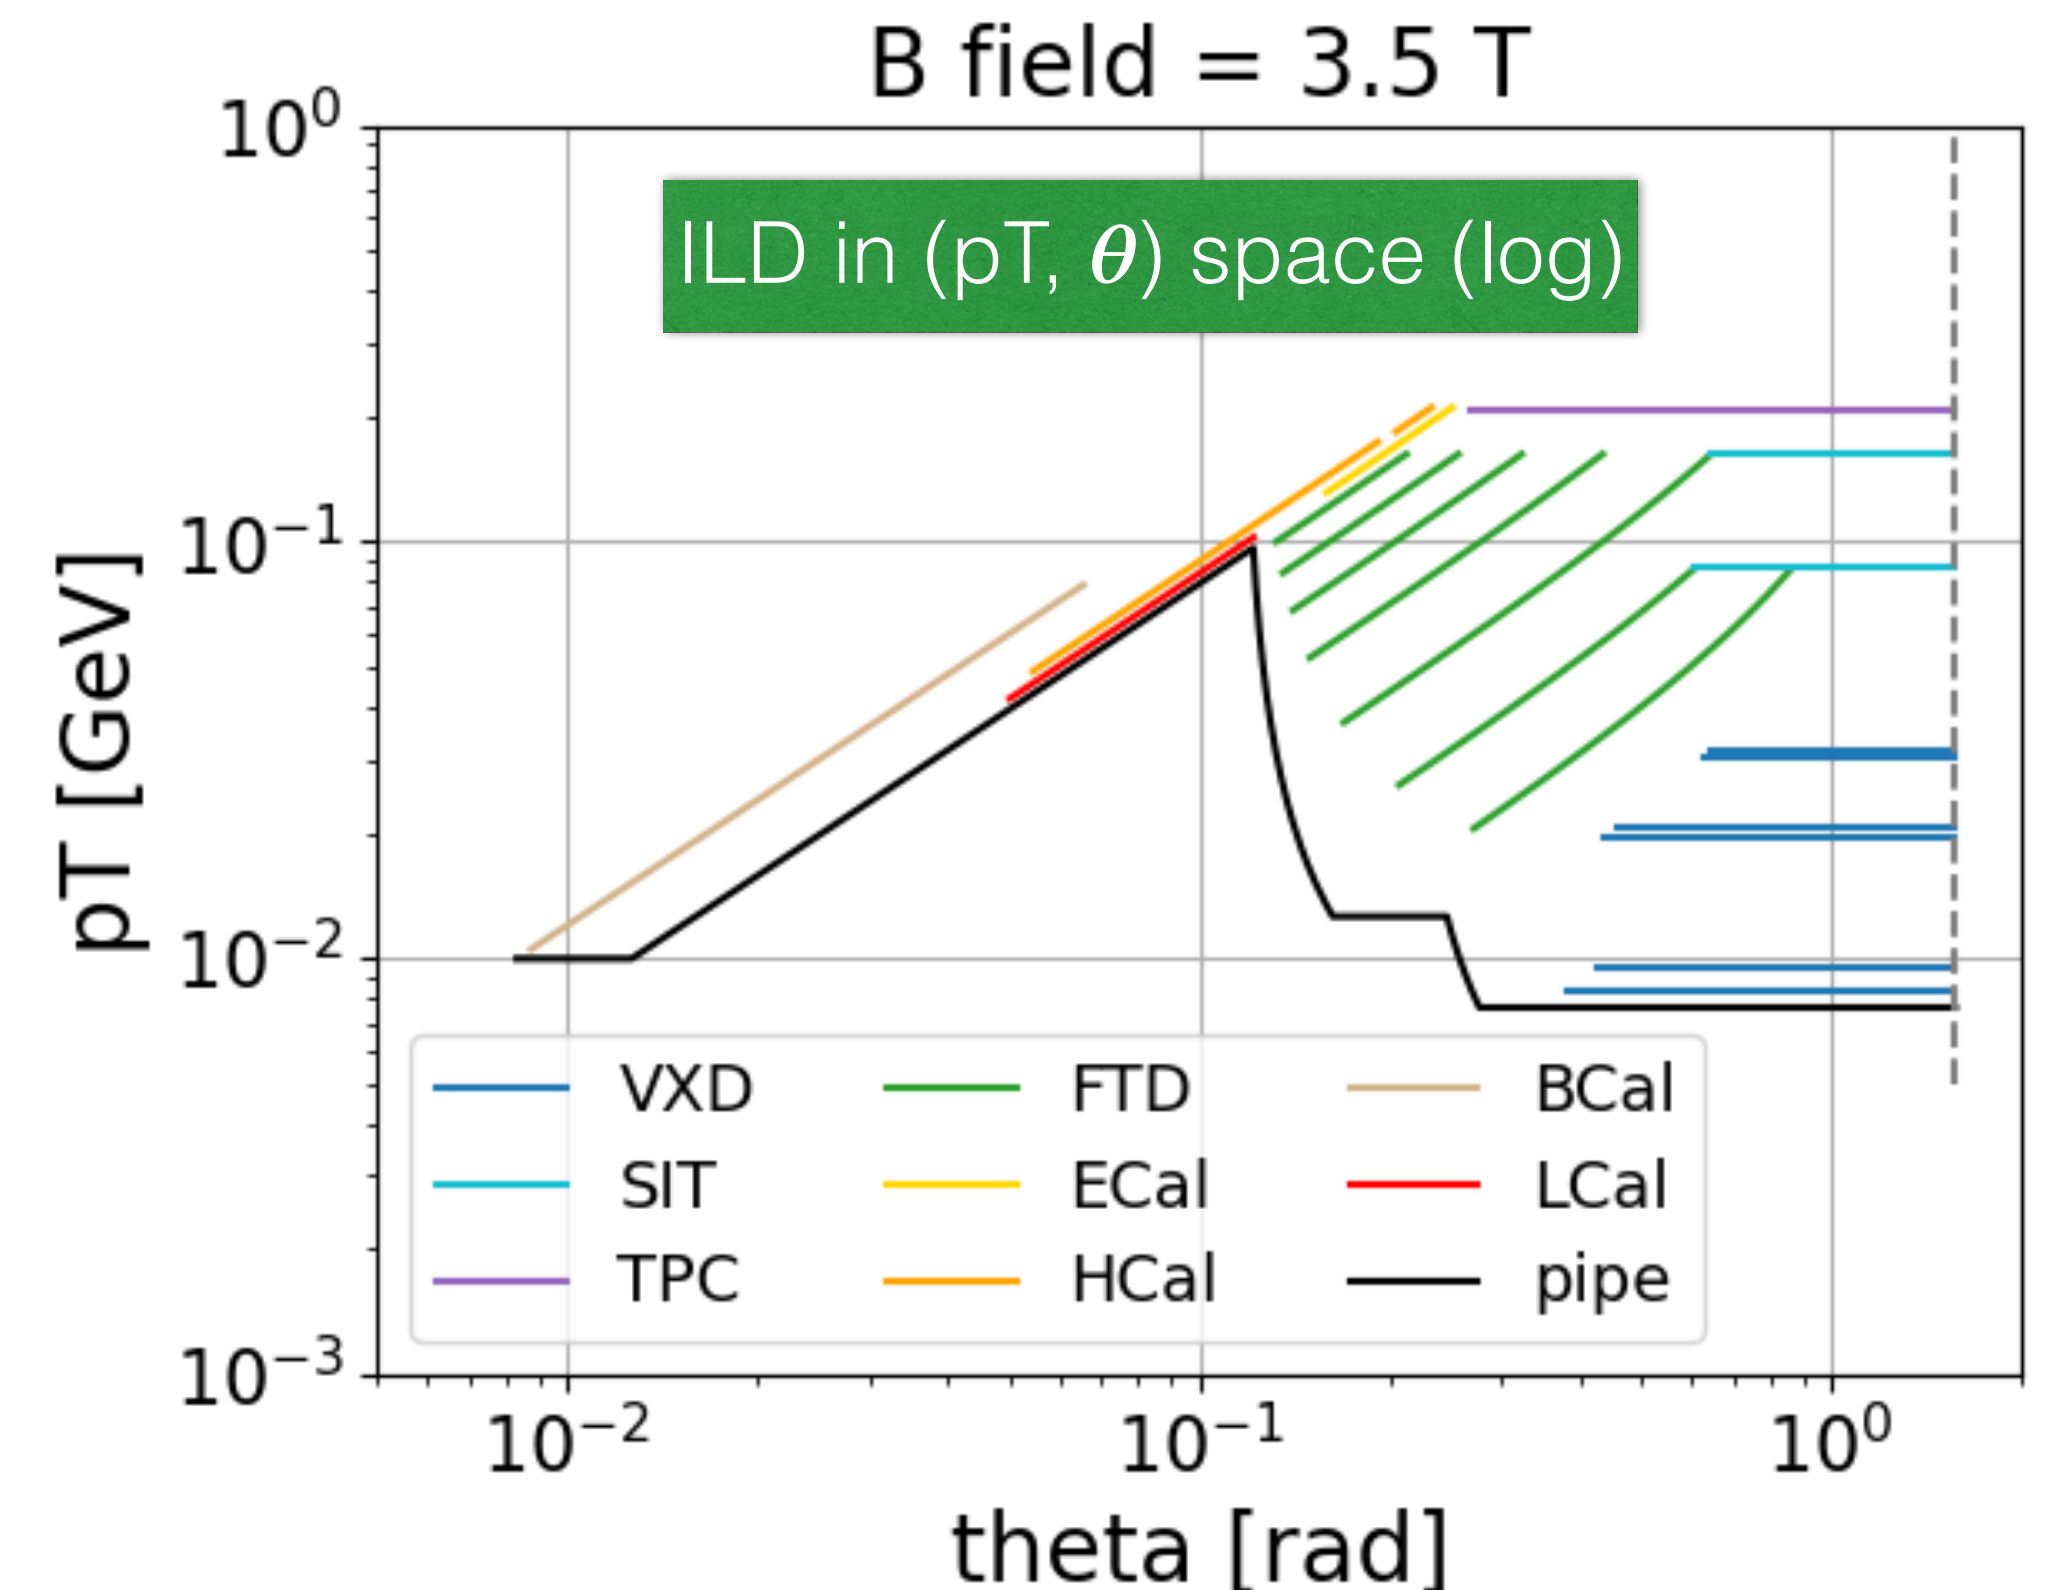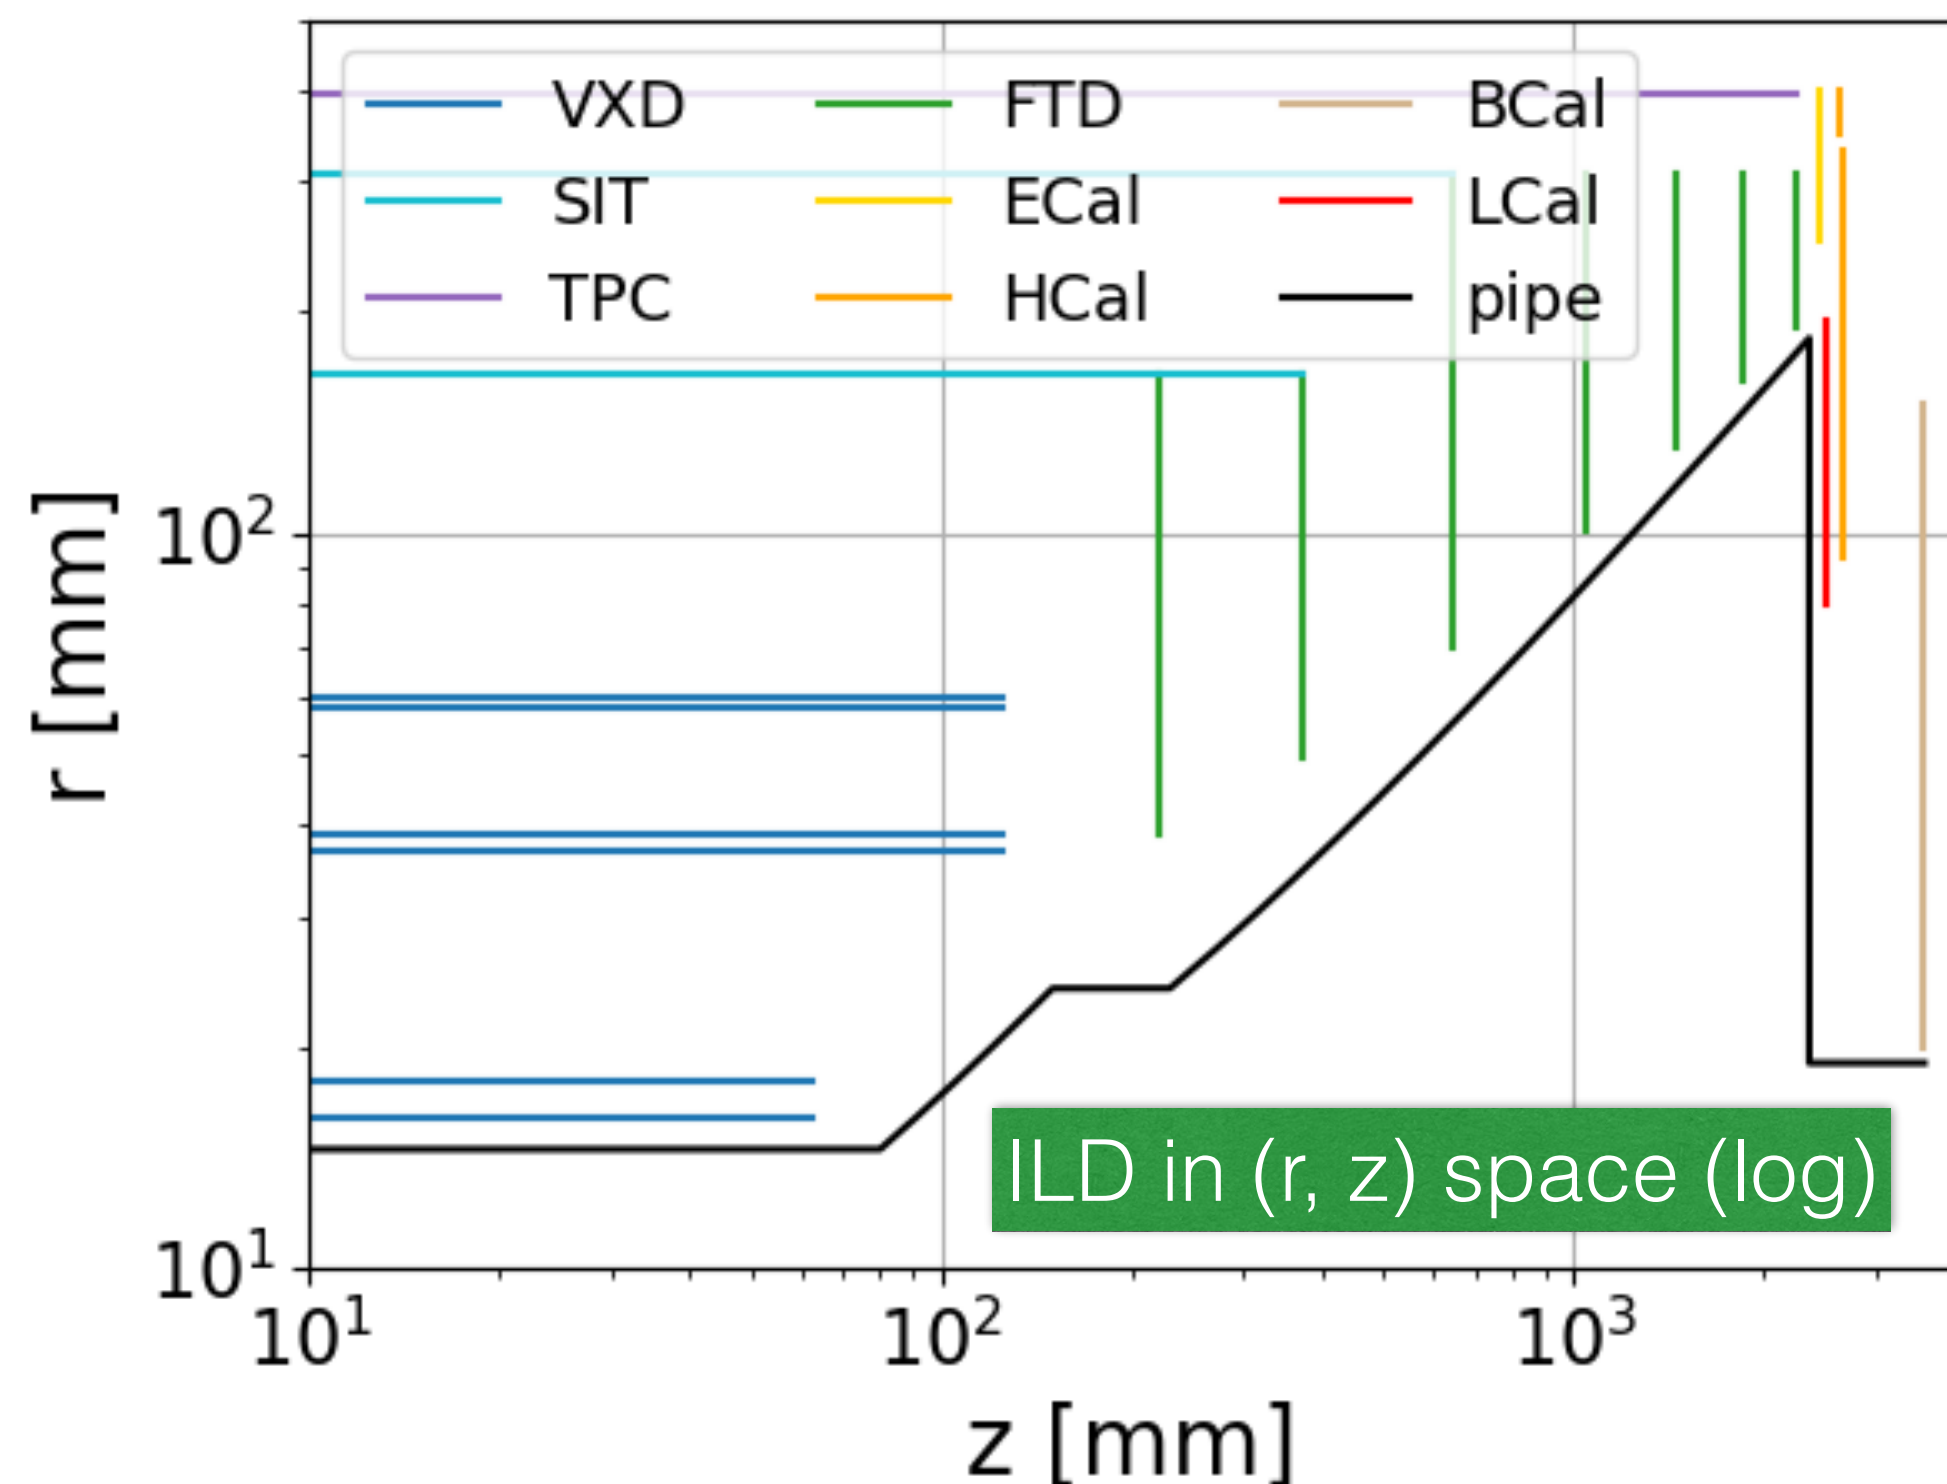



Beam-strahlung

- Baseline: symmetric-charge beams
 - Beam energy = 500 : 31.3 GeV
 - Bunch charge = **2 : 2** $\times 10^{10}$
 - Bunch size $\sigma_z =$ **75 : 75** μm
- **Pairs in the e- beam direction hit the detector.**
 - $> \mathcal{O}(100 \text{ TeV})$ energy deposited!
 - **Fries the detector!**

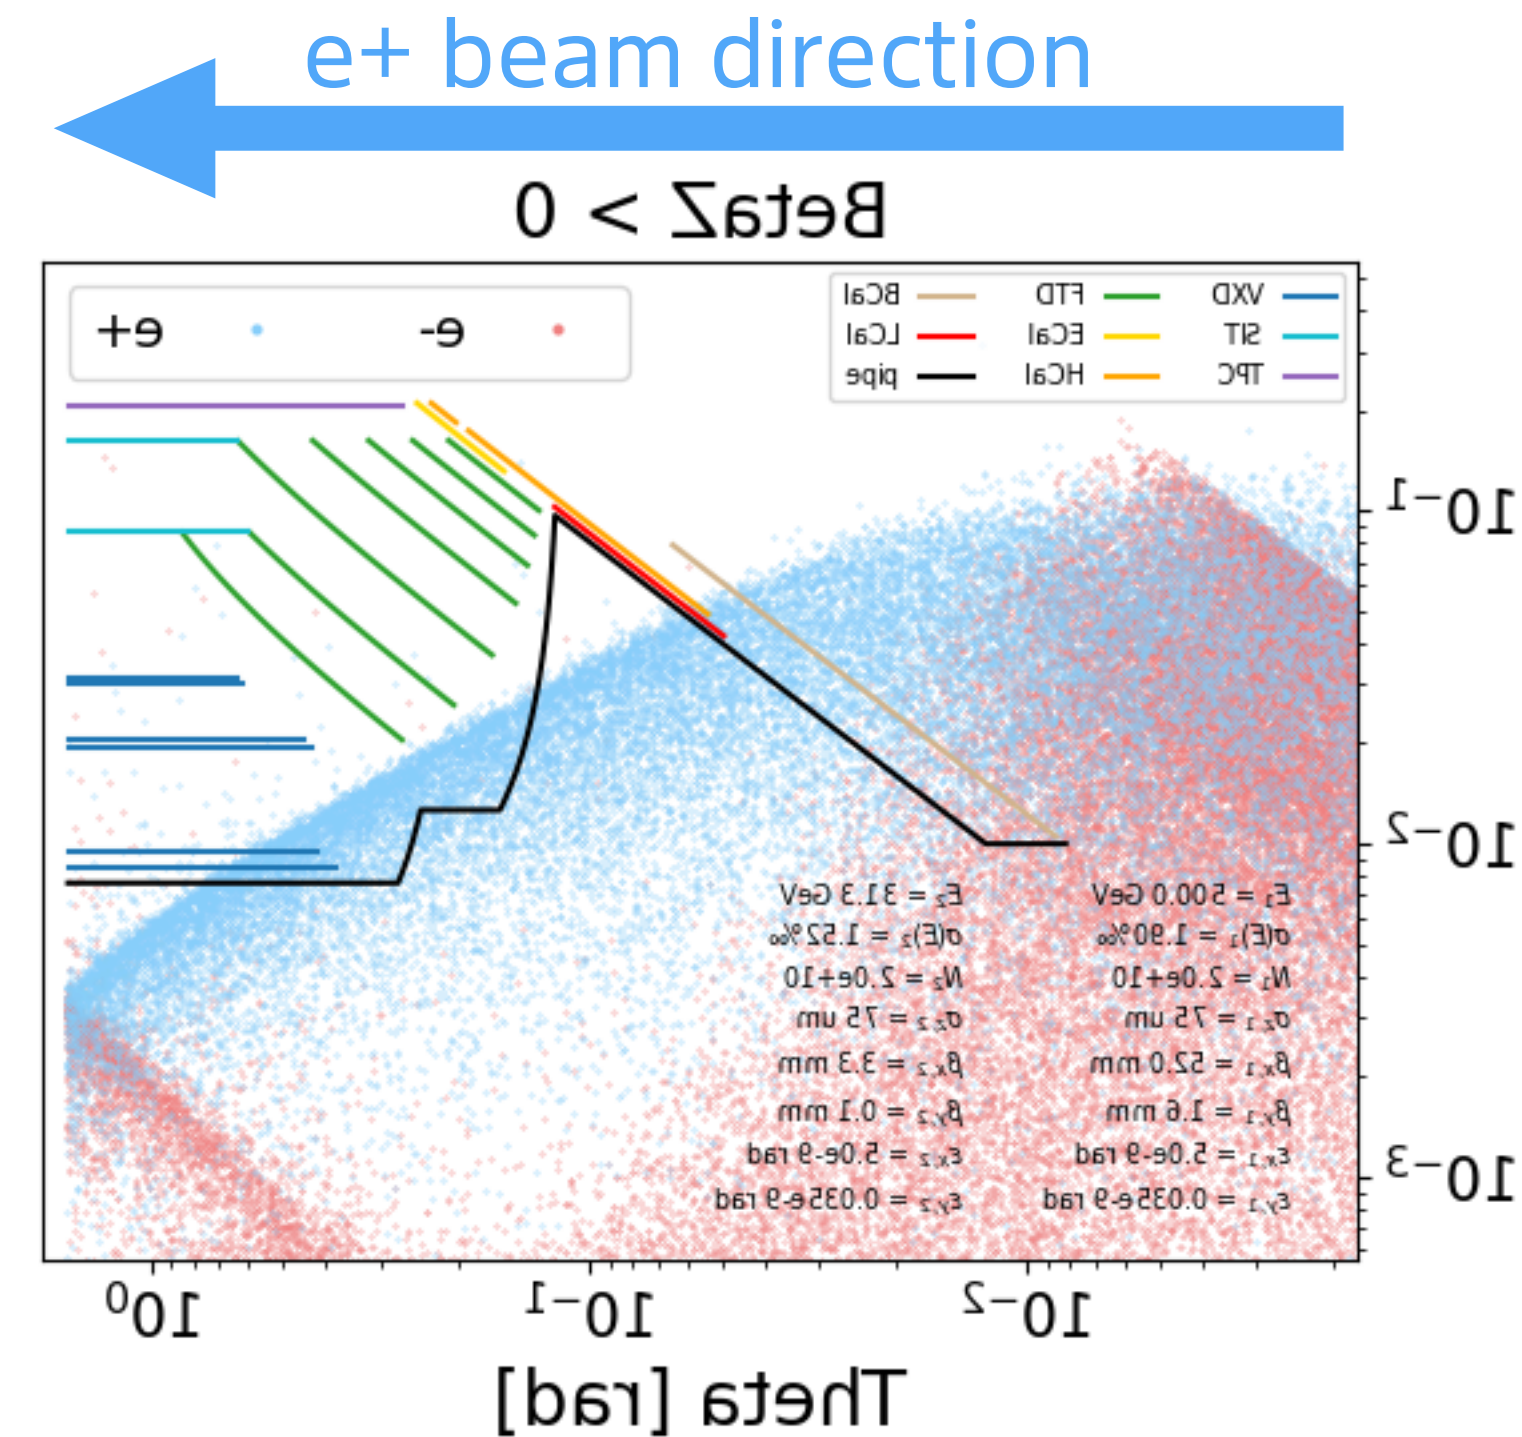
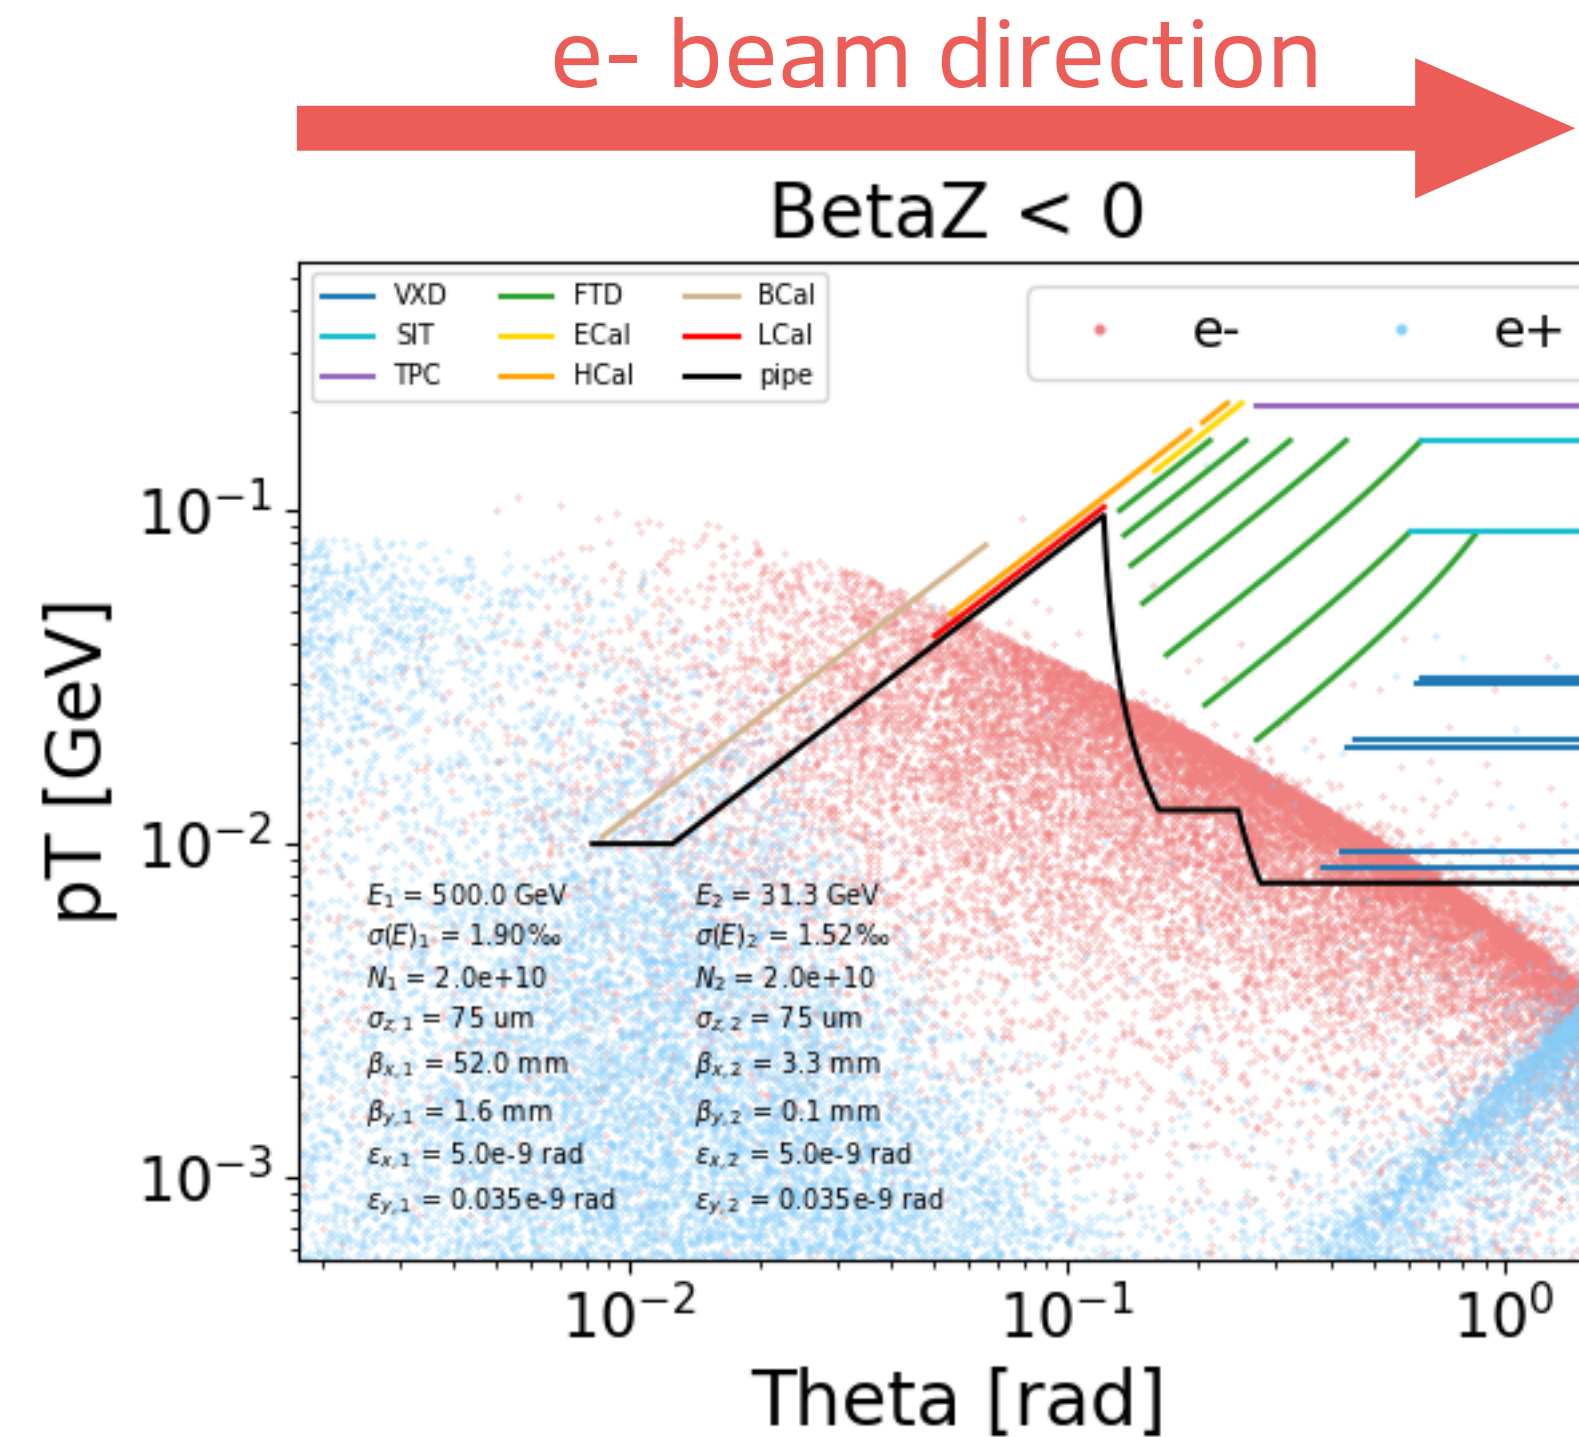


Beam-strahlung

- Baseline: symmetric-charge beams
 - Beam energy = 500 : 31.3 GeV
 - Bunch charge = **2 : 2** $\times 10^{10}$
 - Bunch size $\sigma_z =$ **75 : 75** μm
- **Pairs in the e- beam direction hit the detector.**
 - $> \mathcal{O}(100 \text{ TeV})$ energy deposited!
 - **Fries the detector!**

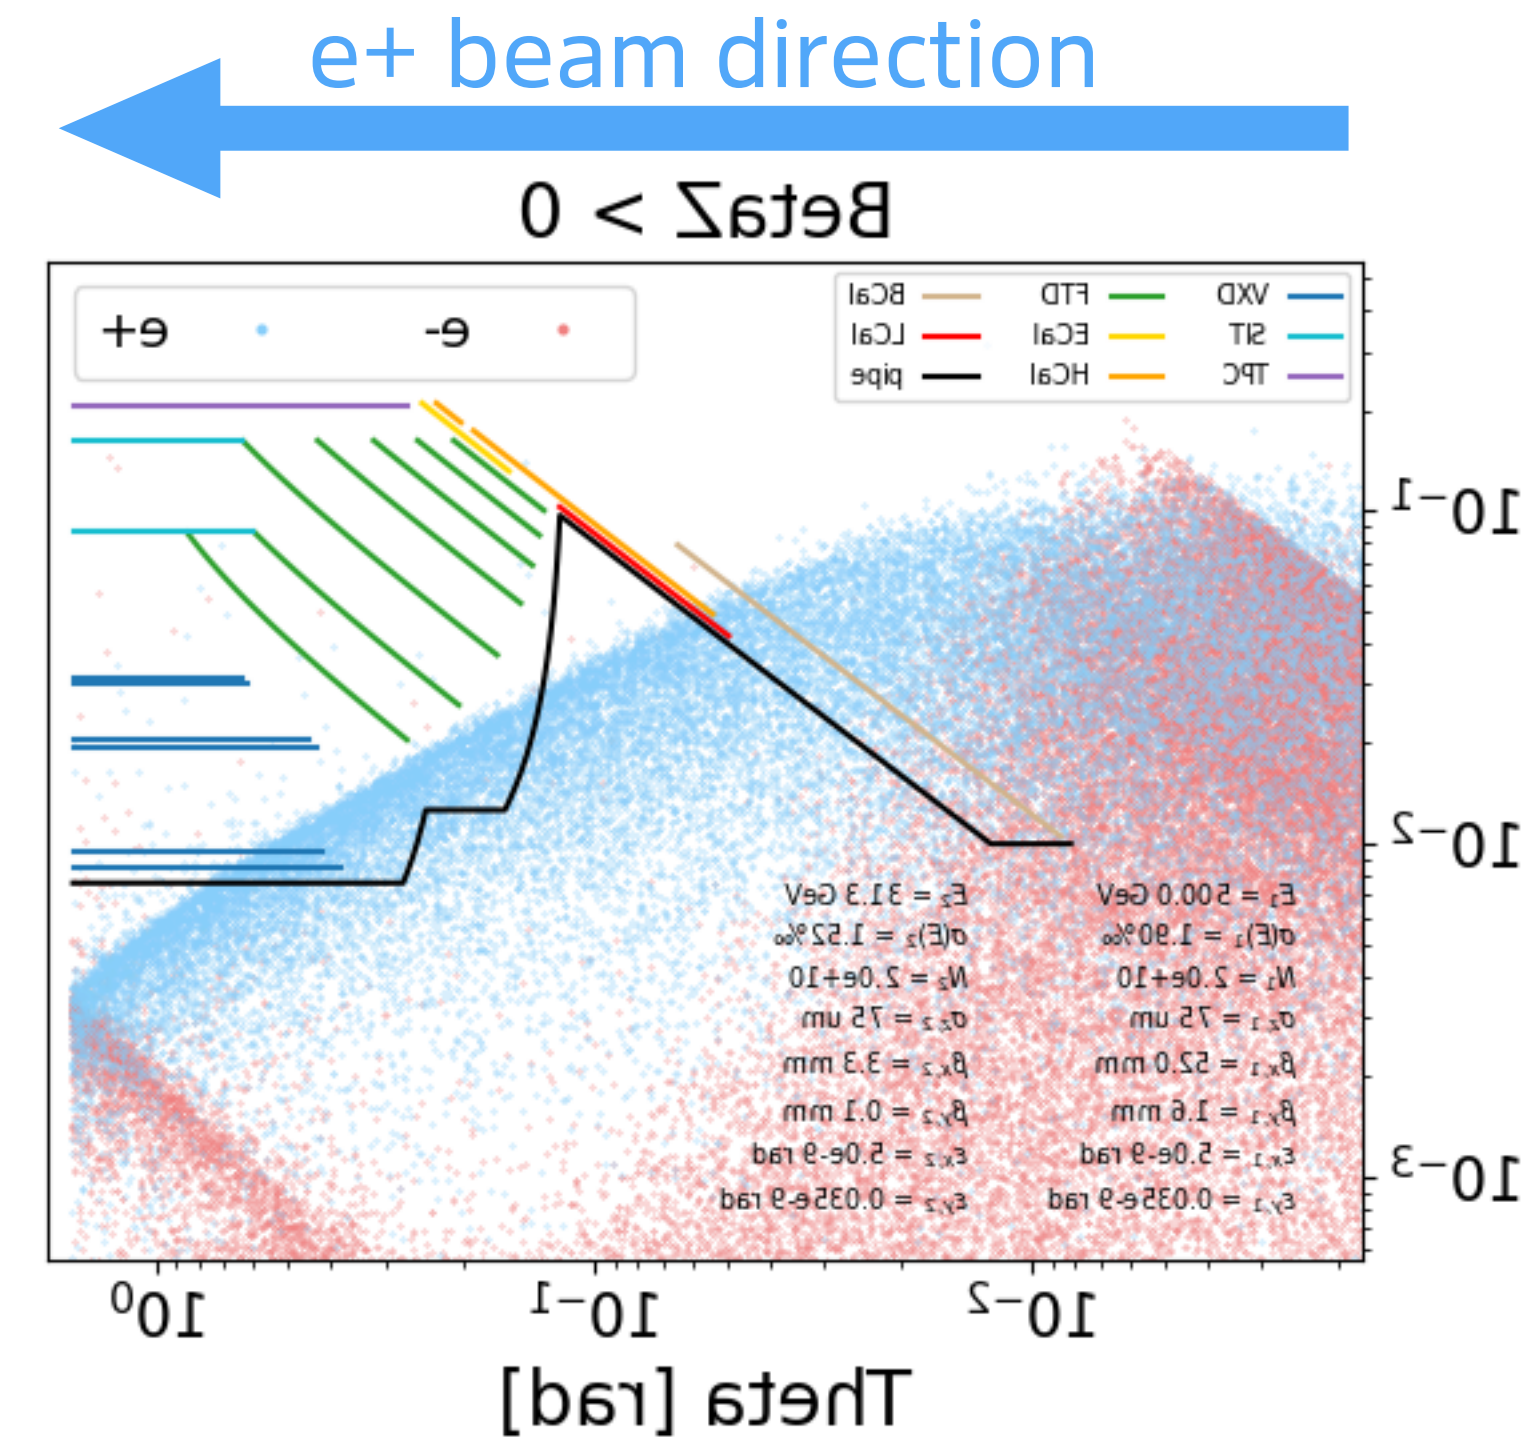
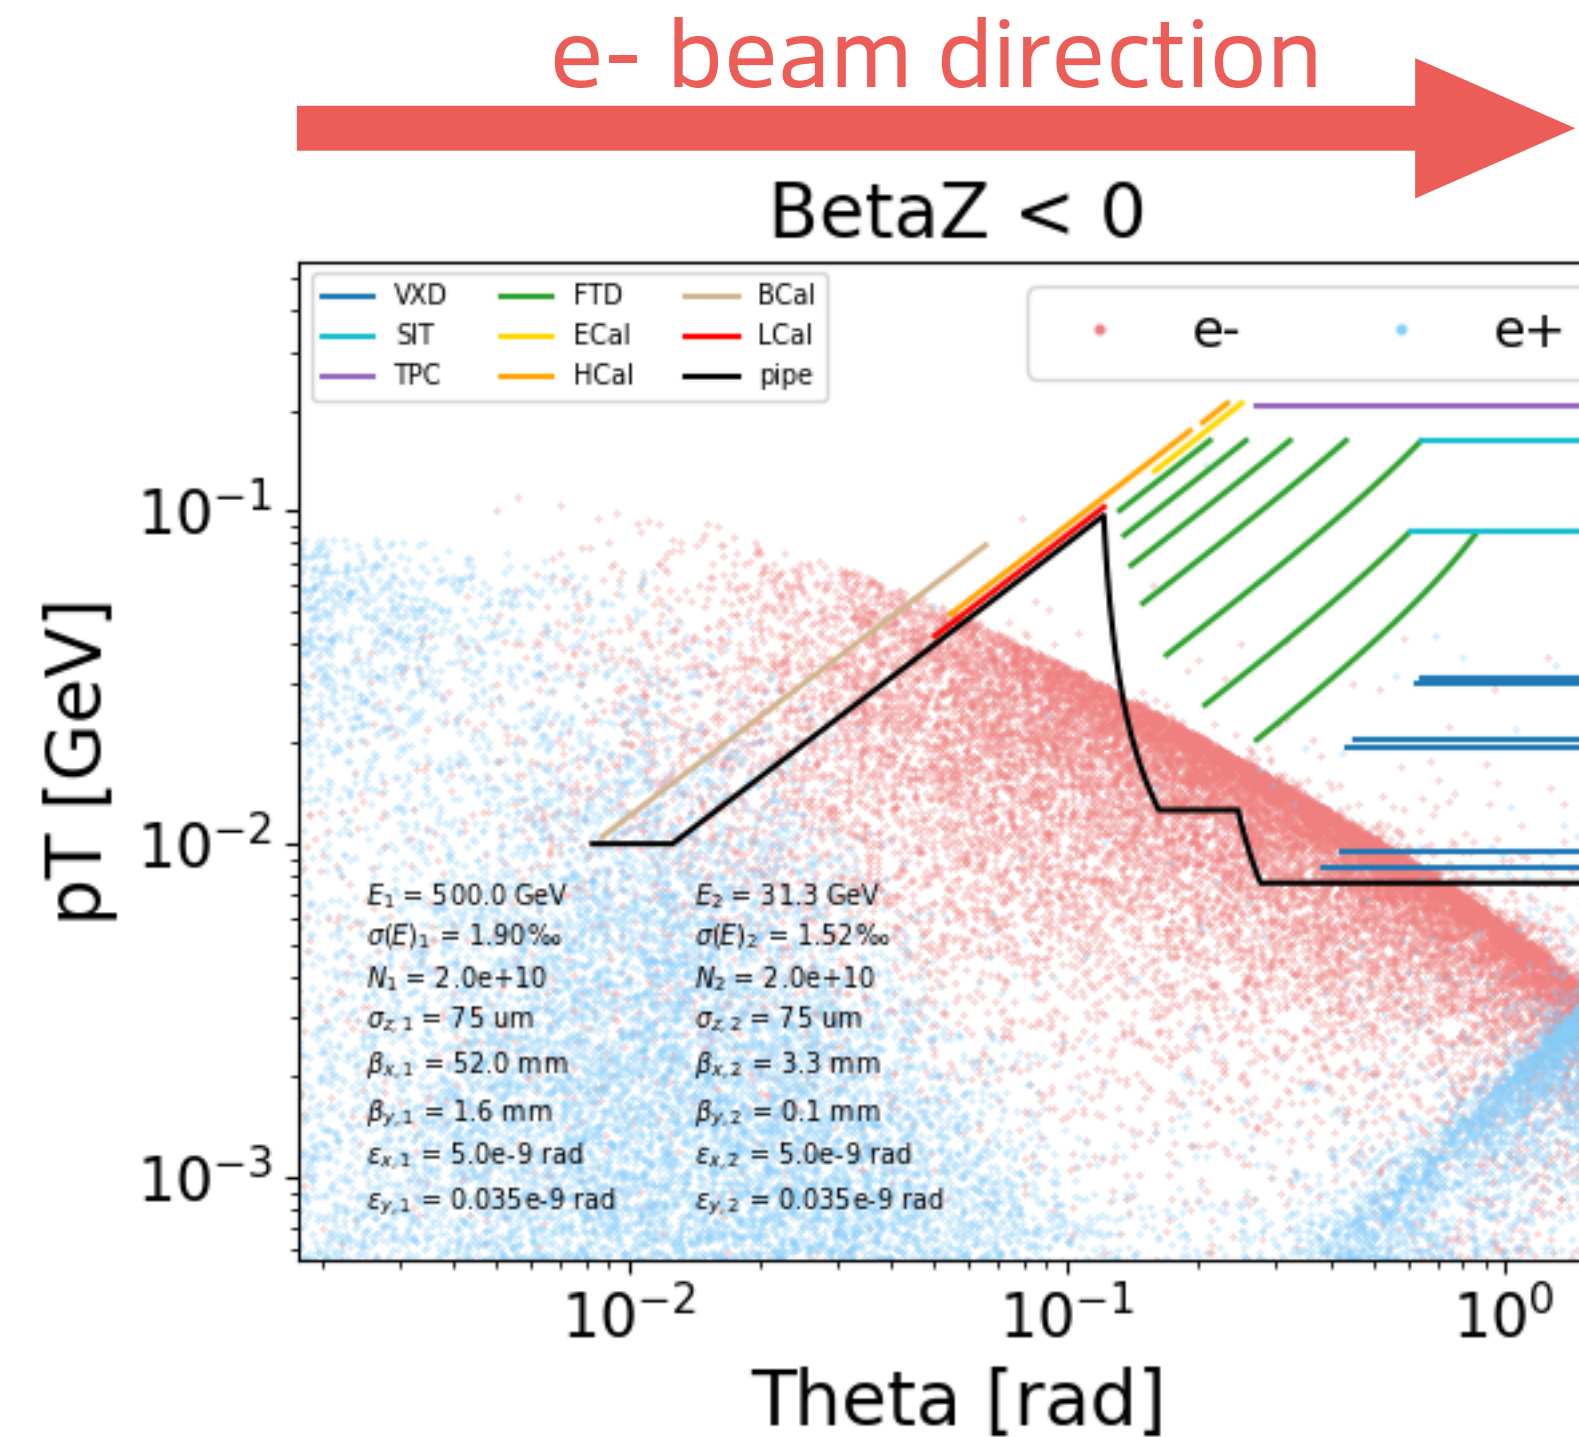


- Improved: asymmetric charge and length
 - Beam energy = 500 : 31.3 GeV
 - Bunch charge = **1.33 : 3** $\times 10^{10}$
 - Bunch size $\sigma_z =$ **75 : 300** μm
(cannot produce long bunches with PWFA)
- **More fine tuning possible!**

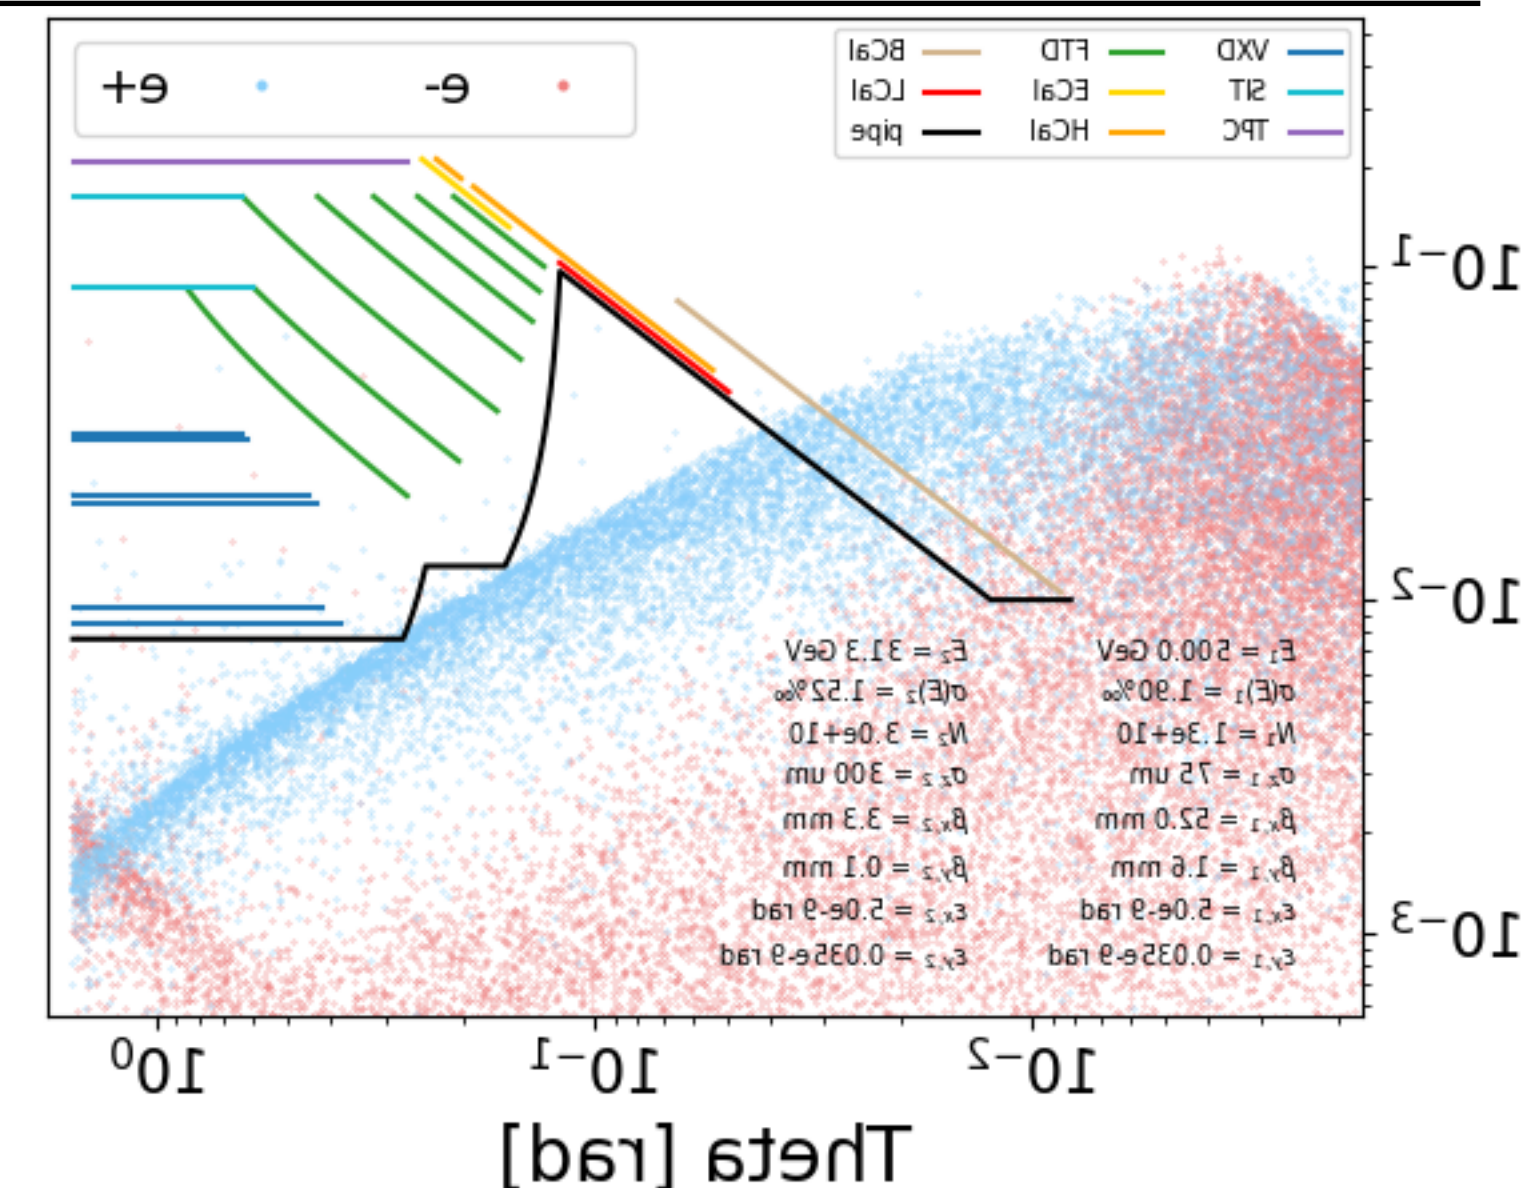
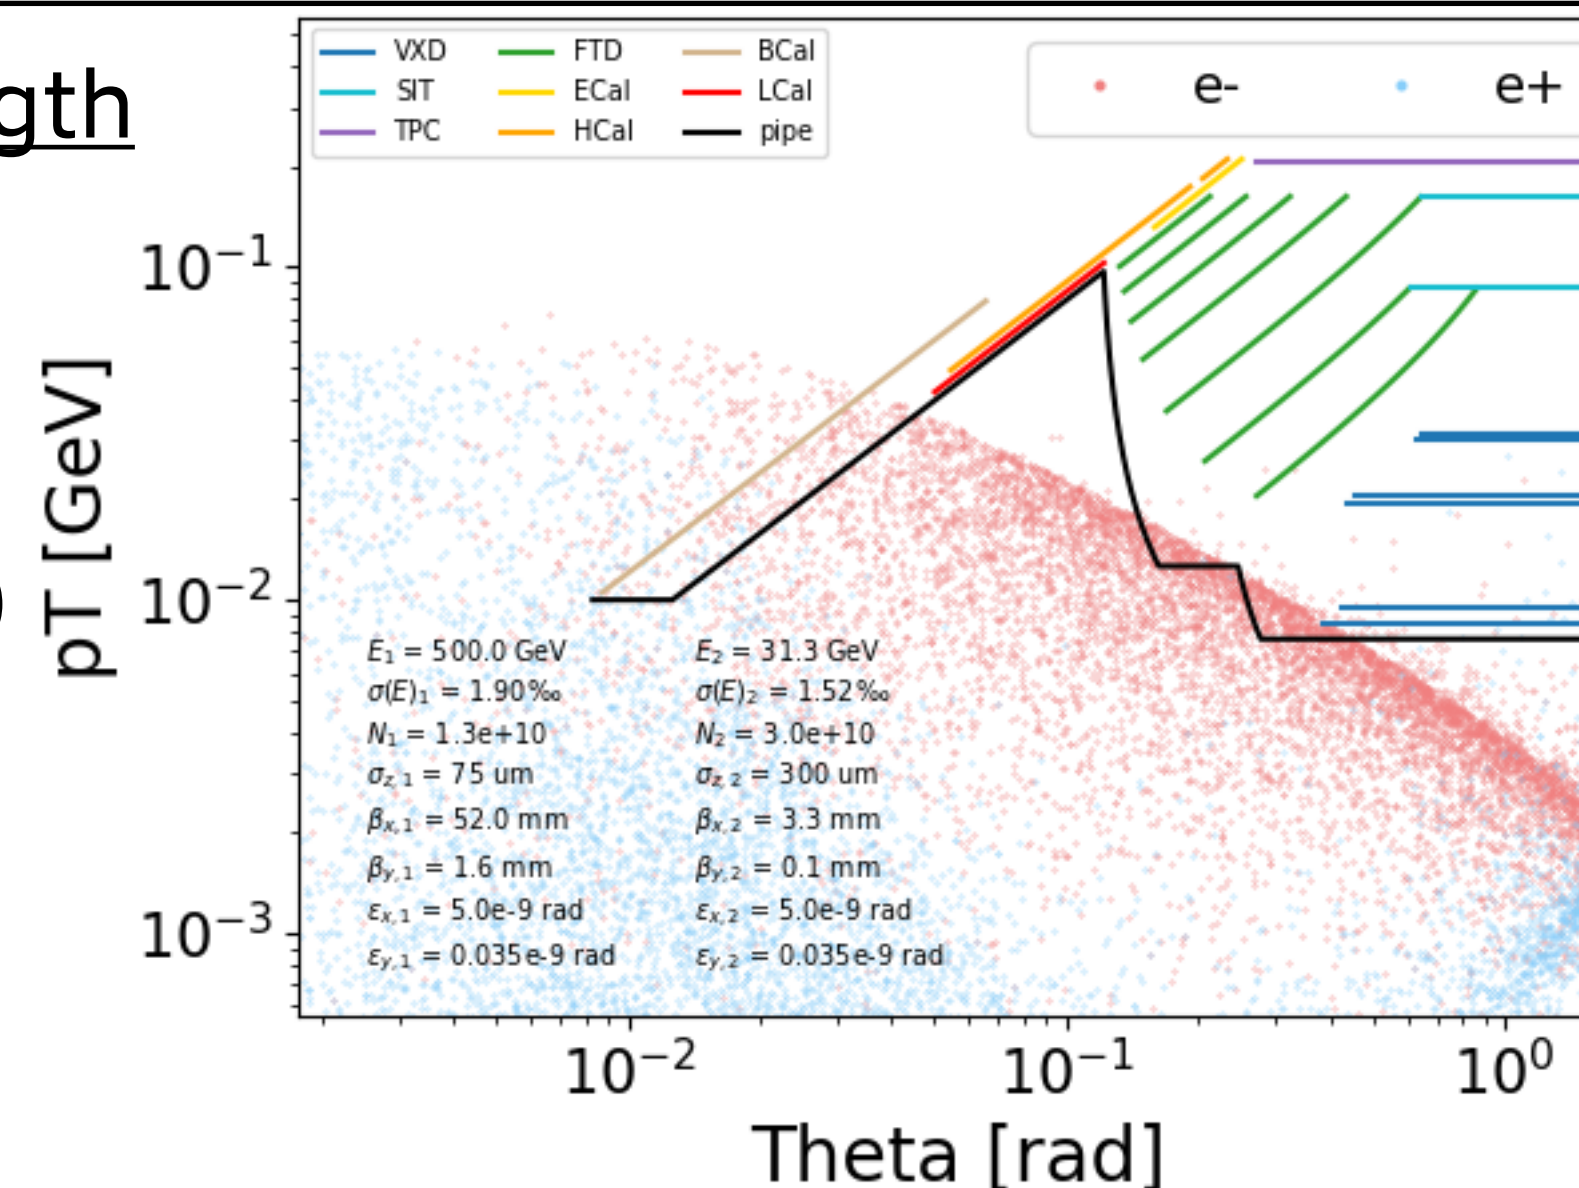


Beam-strahlung

- Baseline: symmetric-charge beams
 - Beam energy = 500 : 31.3 GeV
 - Bunch charge = **2 : 2** x 10¹⁰
 - Bunch size $\sigma_z = \mathbf{75 : 75}$ μm
- **Pairs in the e- beam direction hit the detector.**
 - > O(100 TeV) energy deposited!
 - **Fries the detector!**

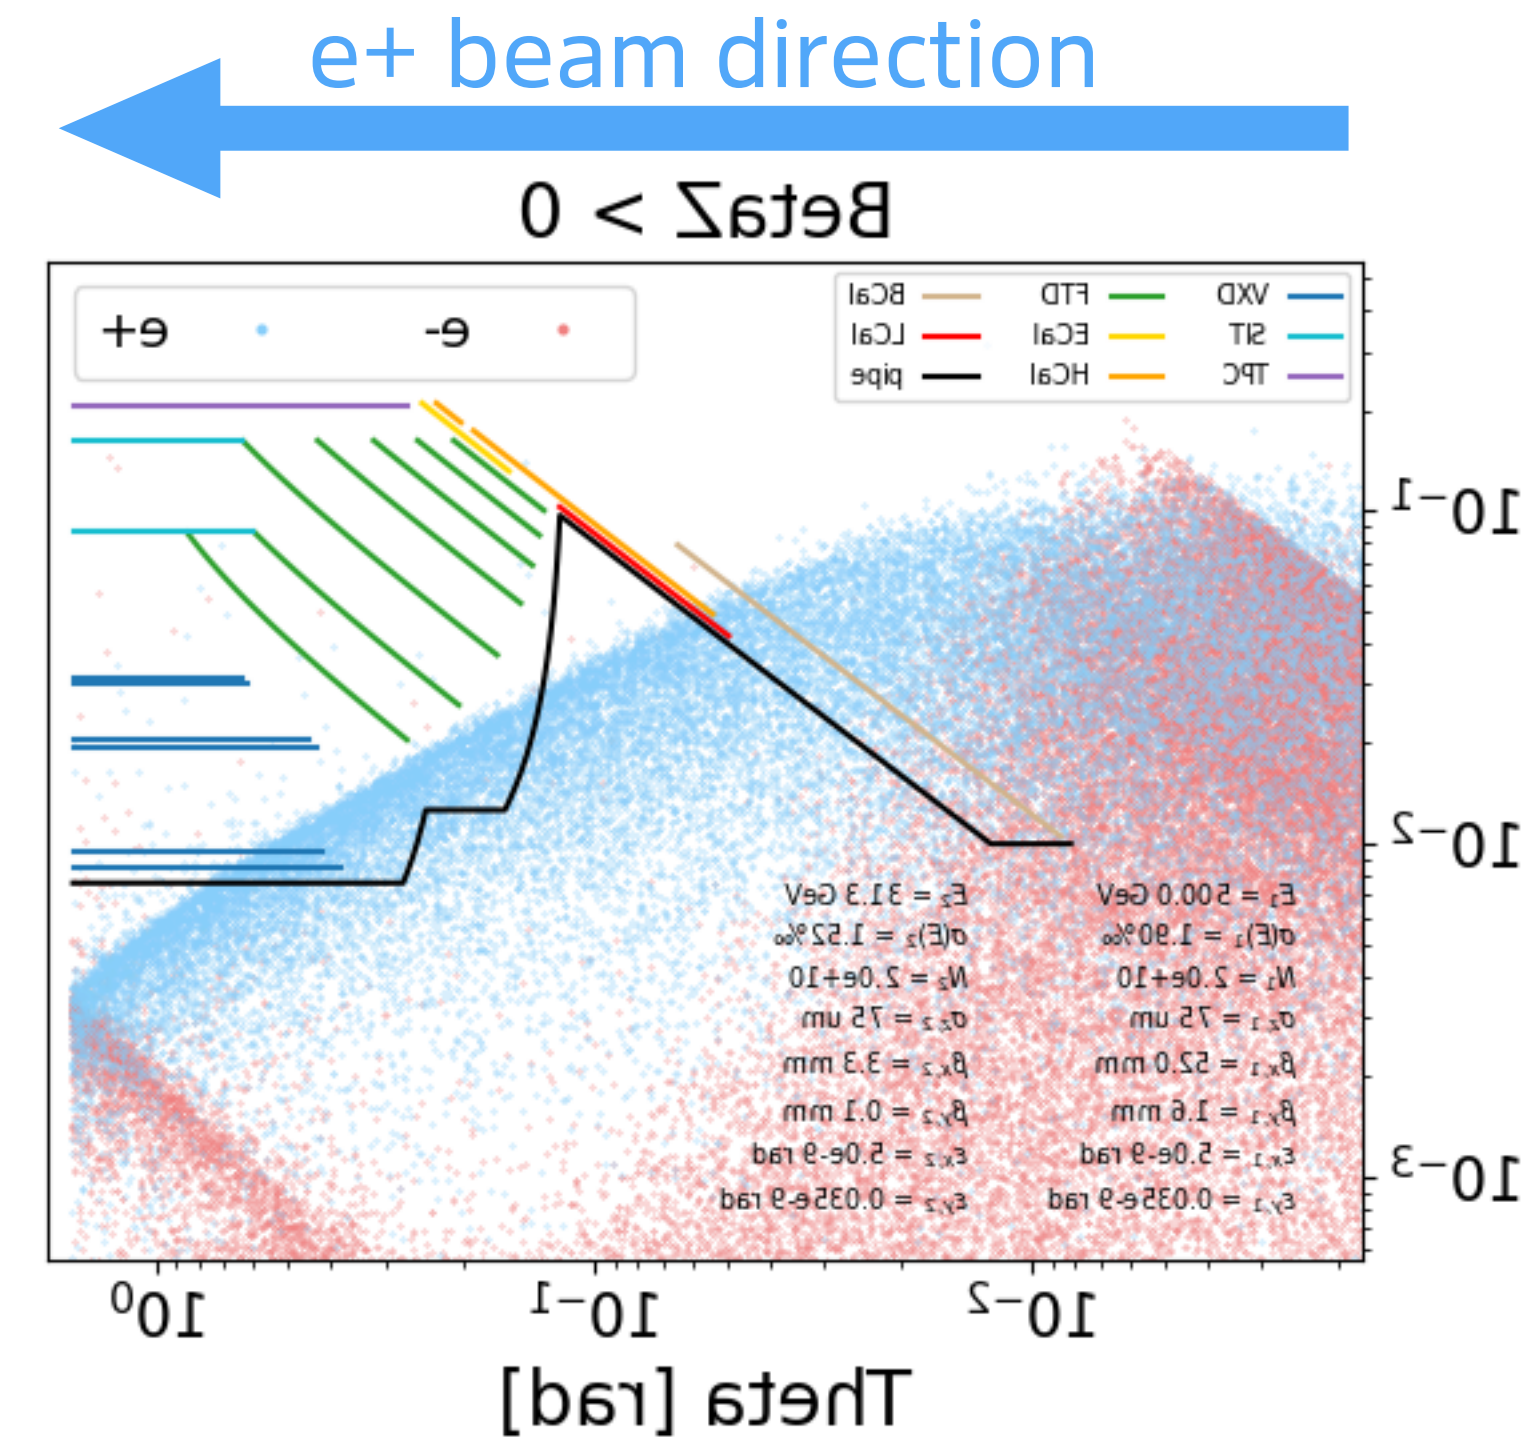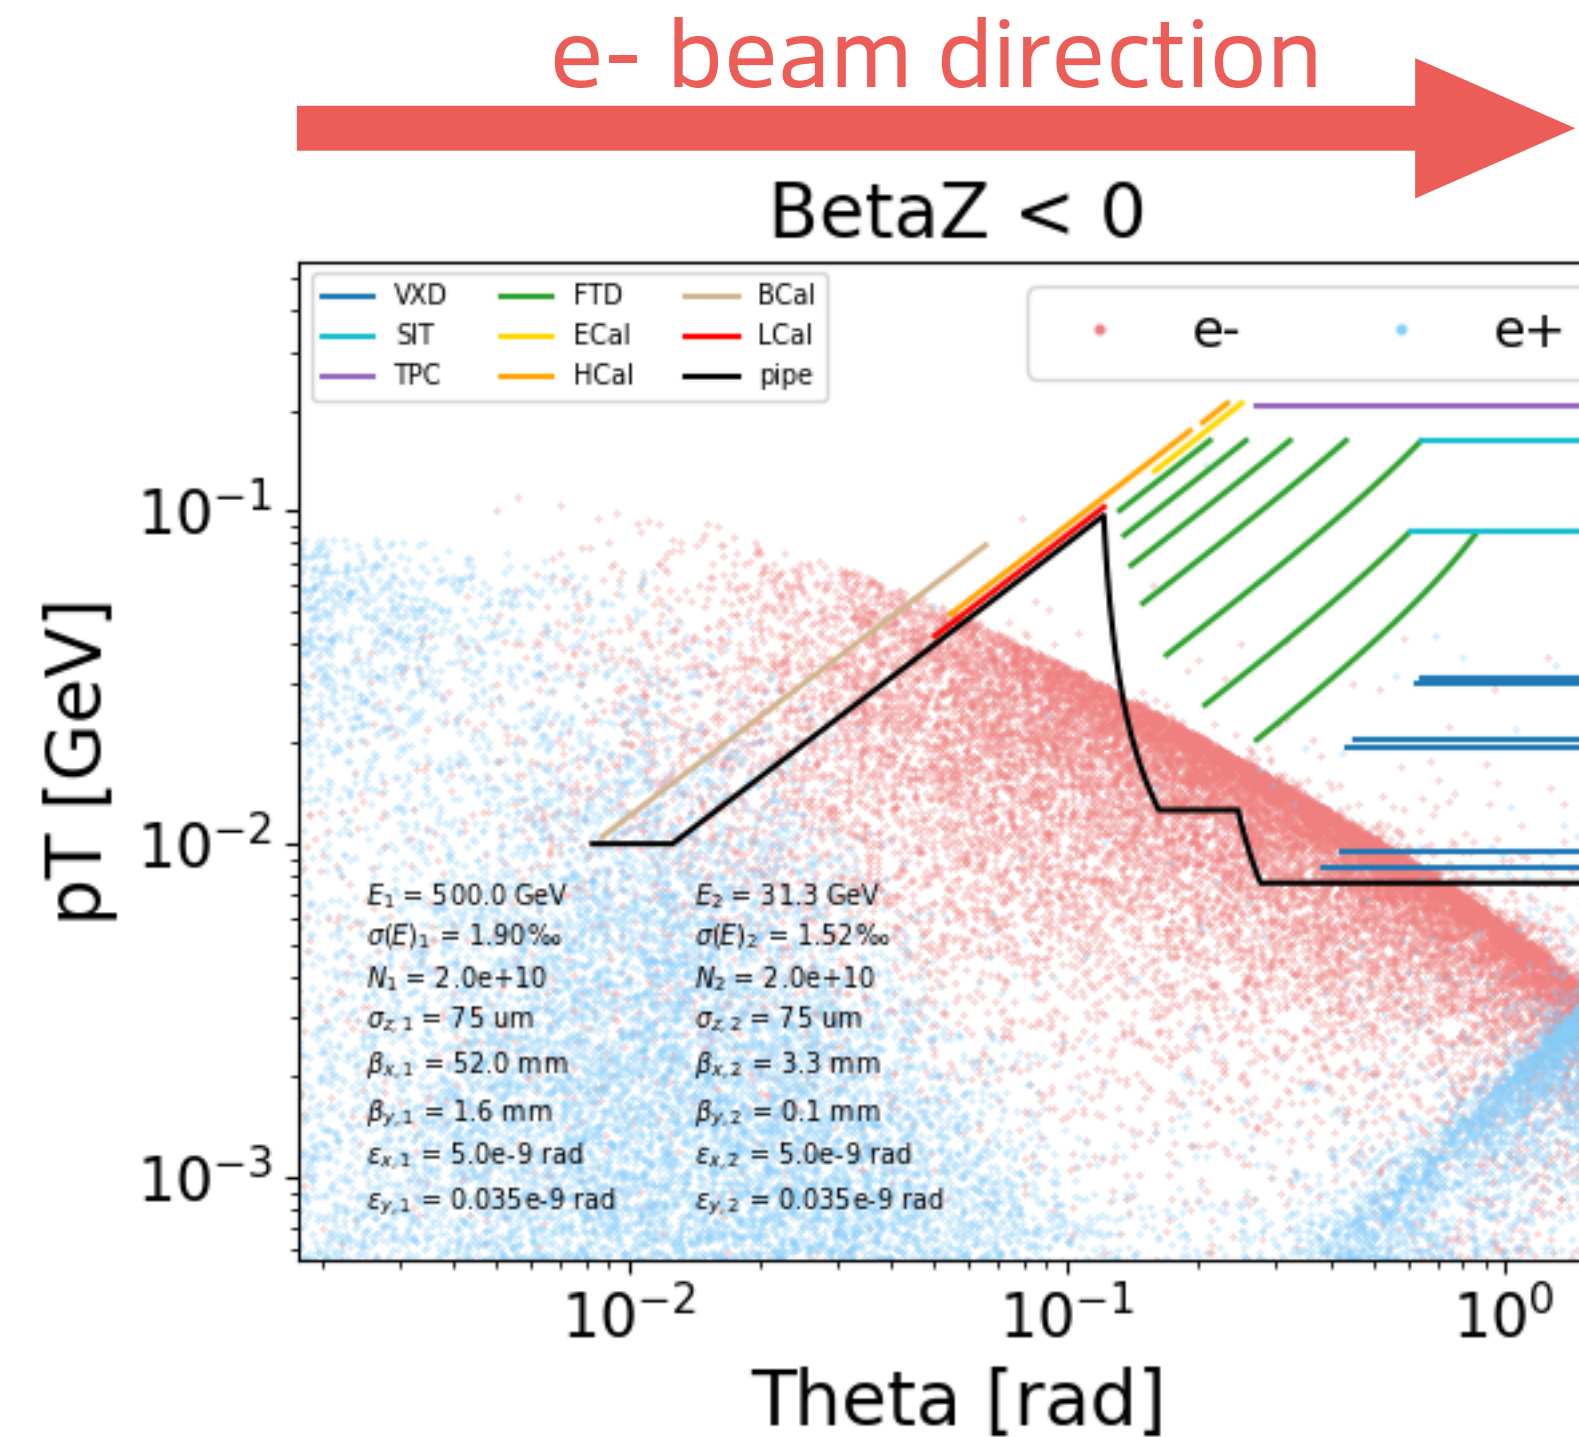

- Improved: asymmetric charge and length
 - Beam energy = 500 : 31.3 GeV
 - Bunch charge = **1.33 : 3** x 10¹⁰
 - Bunch size $\sigma_z = \mathbf{75 : 300}$ μm
(cannot produce long bunches with PWFA)
- **More fine tuning possible!**
- And/or **increase the magnetic field** from 3.5 T → 5 T!

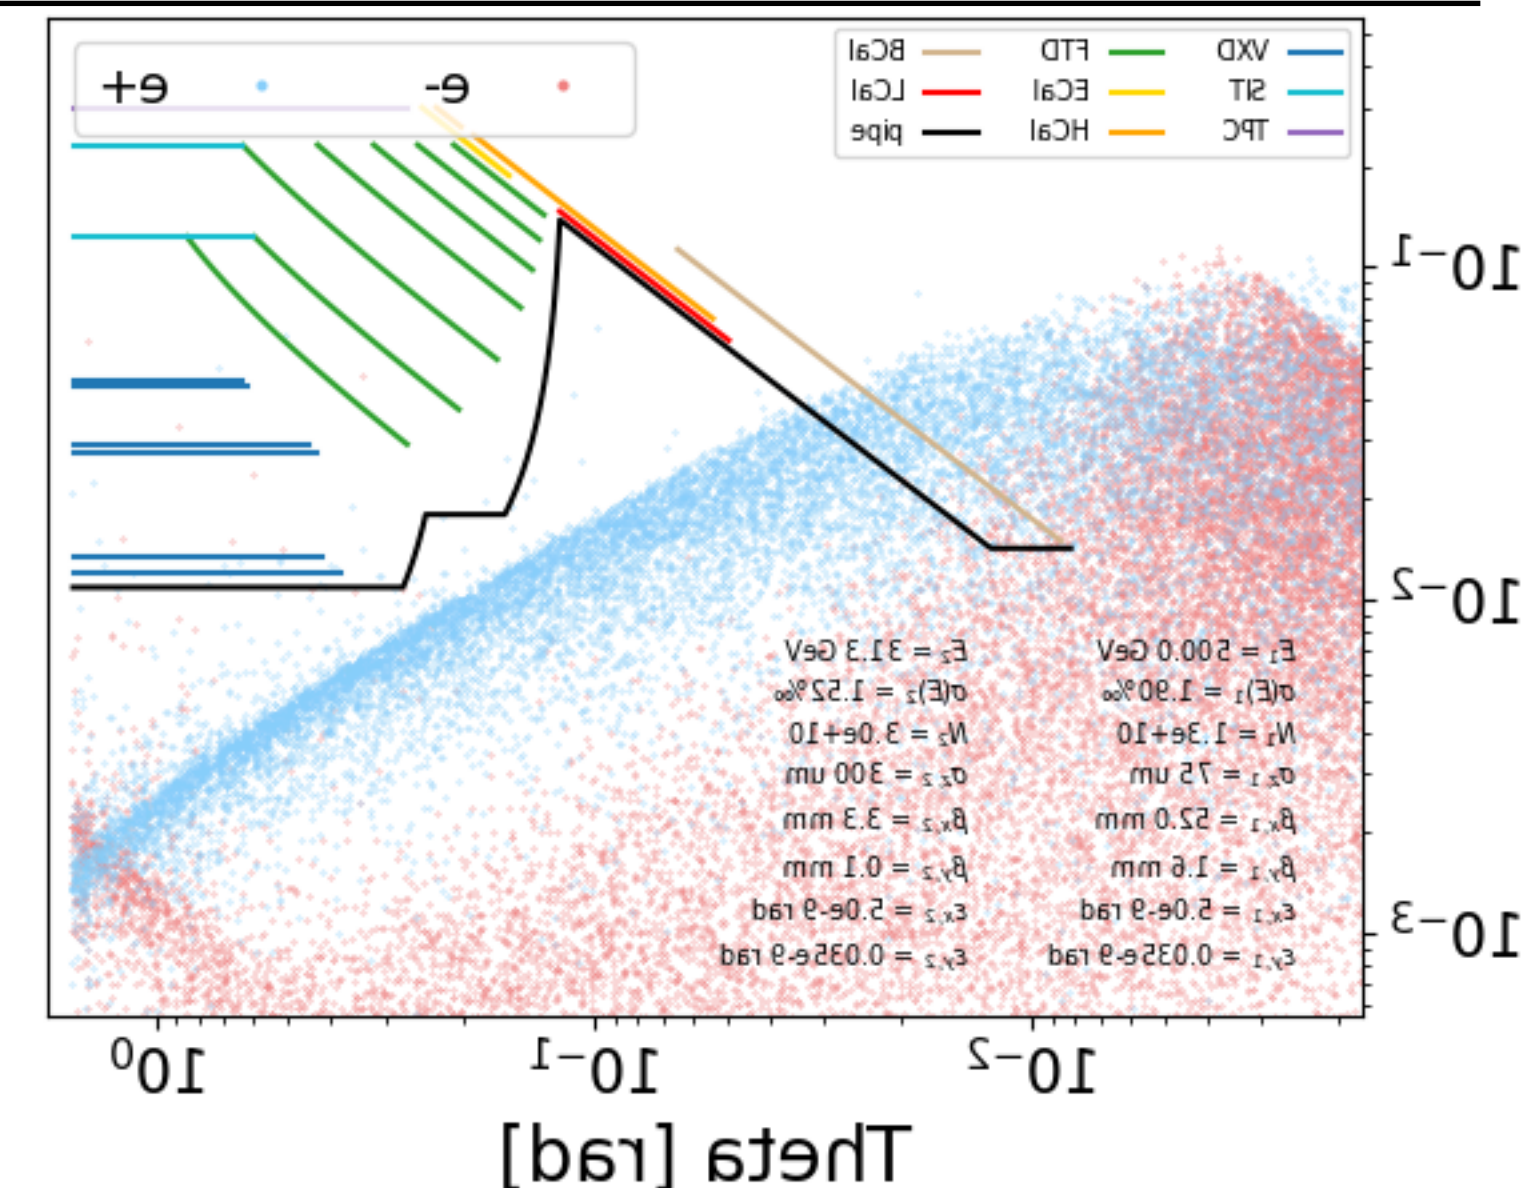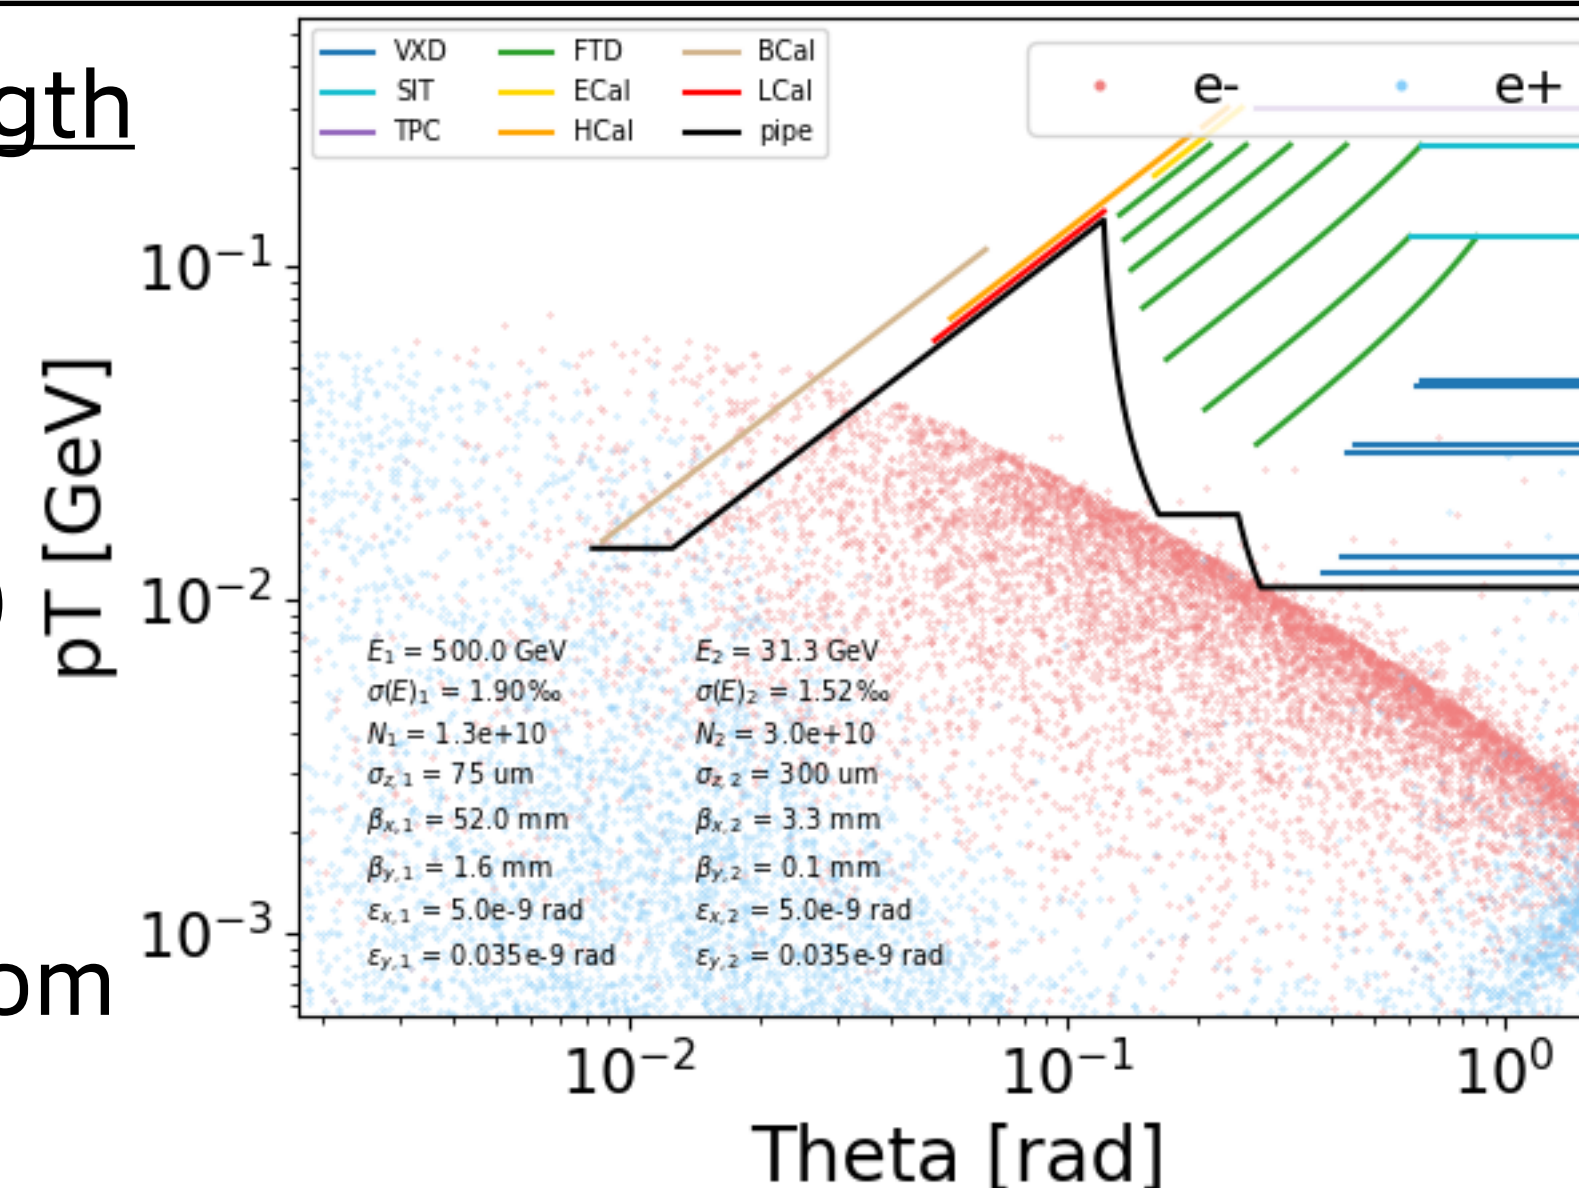

Beam-strahlung: impact on luminosity

- **Luminosity computed by Guinea-Pig:**
 - Total luminosity
 - Luminosity considering only events within 1% of the nominal CM energy ("peak lumi").
- **Using bunch charge $N = 1.33:3 \times 10^{10}$ with $\sigma_z = 75:300 \mu\text{m}$:**
 - **reduces beam backgrounds to acceptable levels...**
 - ... while **only reducing peak lumi by 35% compared to ILC design.**

Lumi [μb / bunch]	ILD TDR	HALHF $N = 2 : 2 \times 10^{10}$ $\sigma_z = 75 : 75 \mu\text{m}$	HALHF $N = 1.33 : 3 \times 10^{10}$ $\sigma_z = 75 : 300 \mu\text{m}$
Total lumi	1.12	1.35	0.80
Lumi within 1% of nominal CM energy	0.92	0.80	0.56
Beam backgrounds?		large	mitigated

Conclusions: an exciting concept

arxiv:2303.10150

A bit less powerful than ILC, but much more affordable!

- **Brand new project (< 1 year old), small team.**
 - Started to **look into impact on physics from asymmetric beams** (energy, charge, parameters...)
 - Iterate with accelerator colleagues to **find the best beam parameters (background vs lumi)**.
 - Competes with other linear colliders, with **significantly lower cost and environmental footprint**.
- **No show-stoppers so far, but many challenges remain:**
 - **Plasma acceleration**: beam charge, repetition rate, power dissipation, polarisation...
 - Staging PWFA cell concept needs ~10 years development
 - **Detector design in the forward region (B field, ...)**
 - Luminosity measurement (Bhabha counting) to be studied.
 - Upgradability to higher CM energy is unclear.
- **Many possibilities for new studies** (physics cases, detector design...)

See talk by B. Foster
this afternoon
(T13 - Accelerators for HEP)







Backup

Beam background hit map, $\sigma_z = 75:75$

N = 2:2

N = 1.33:3


N = 1:4

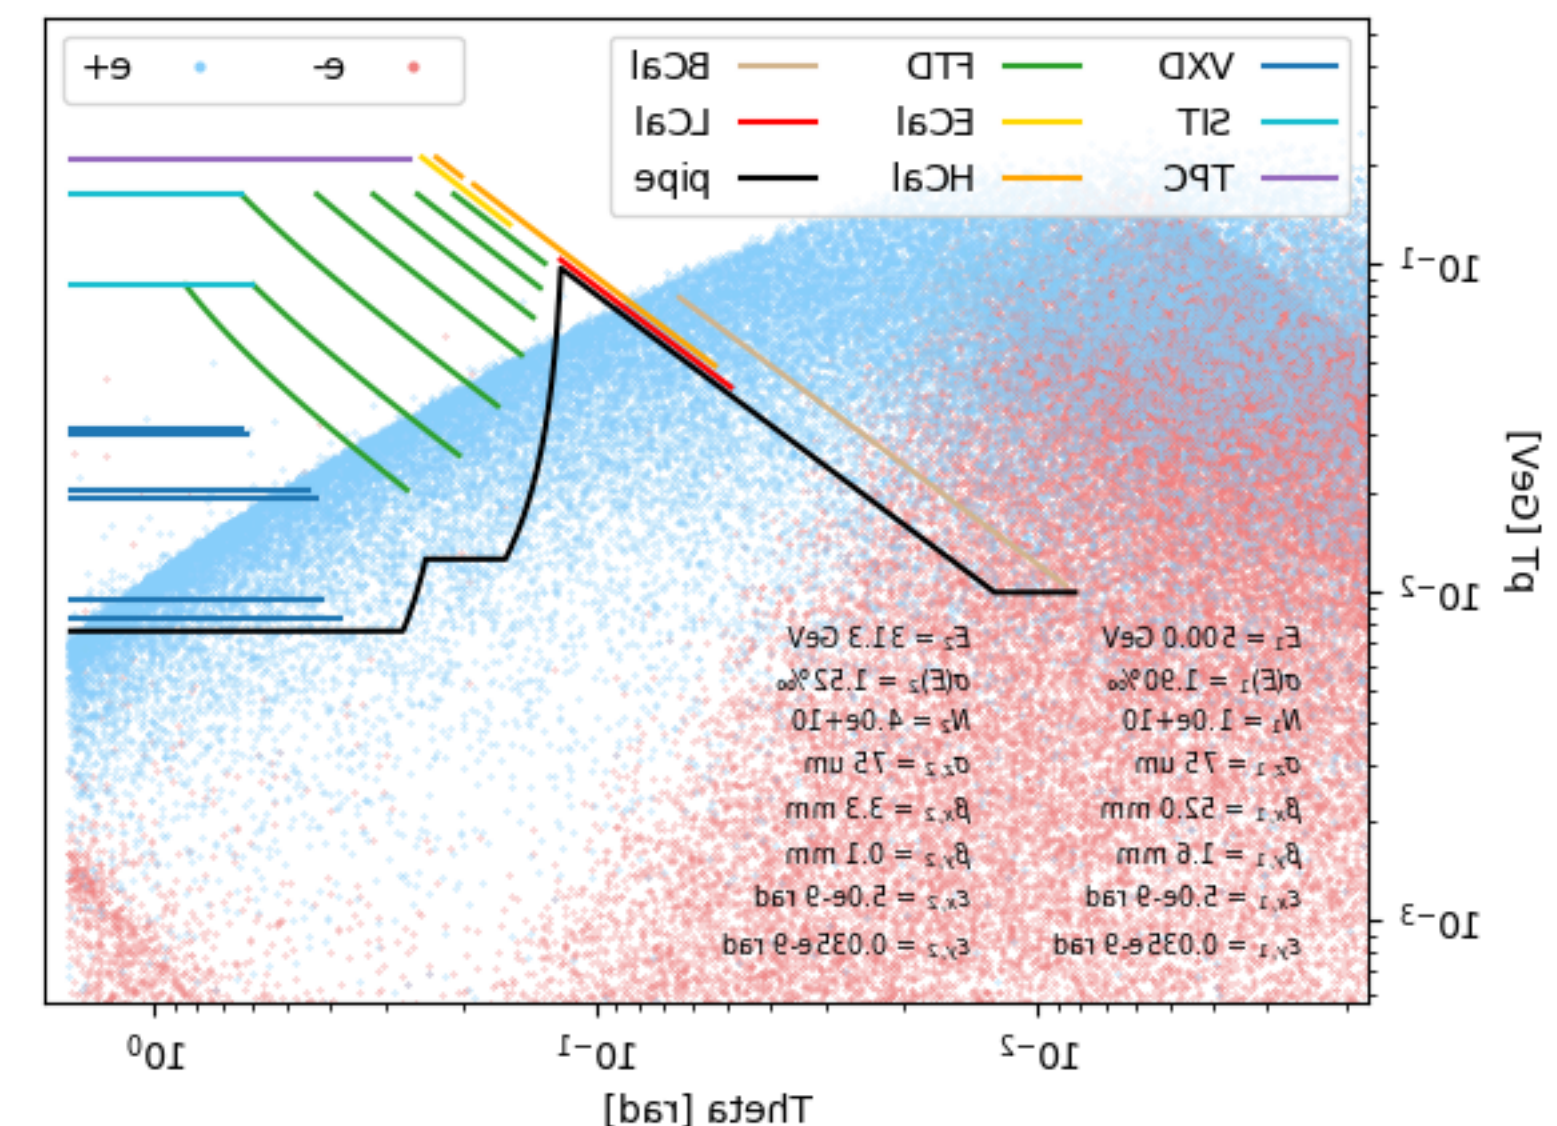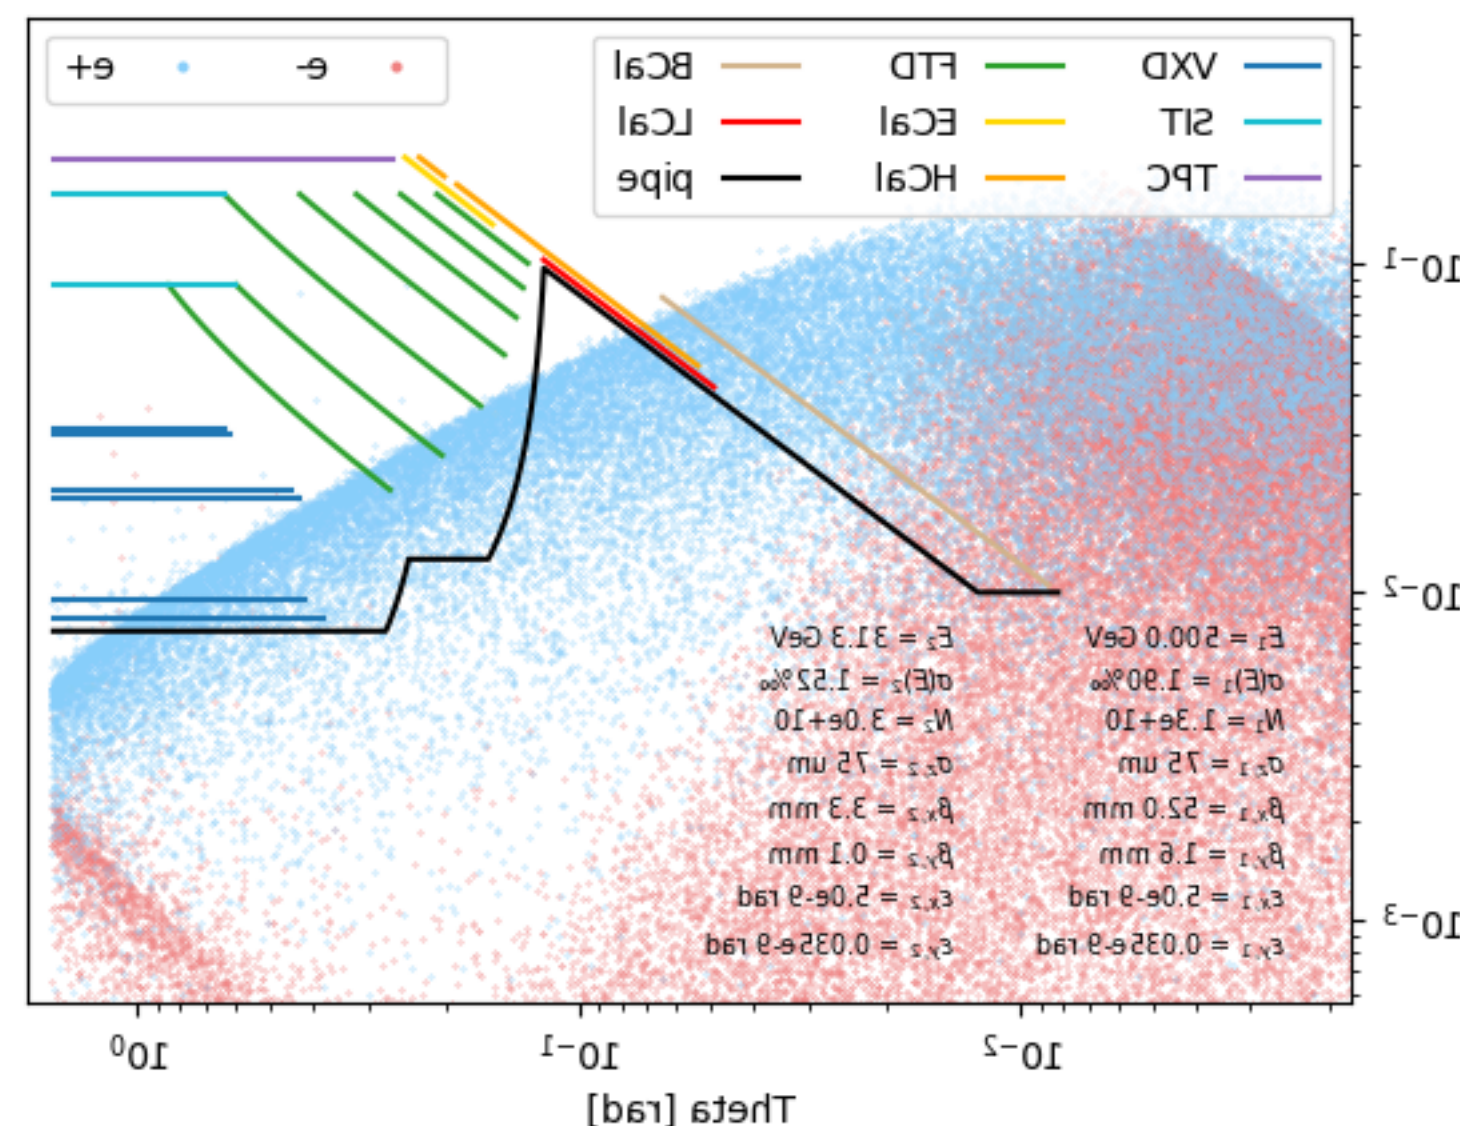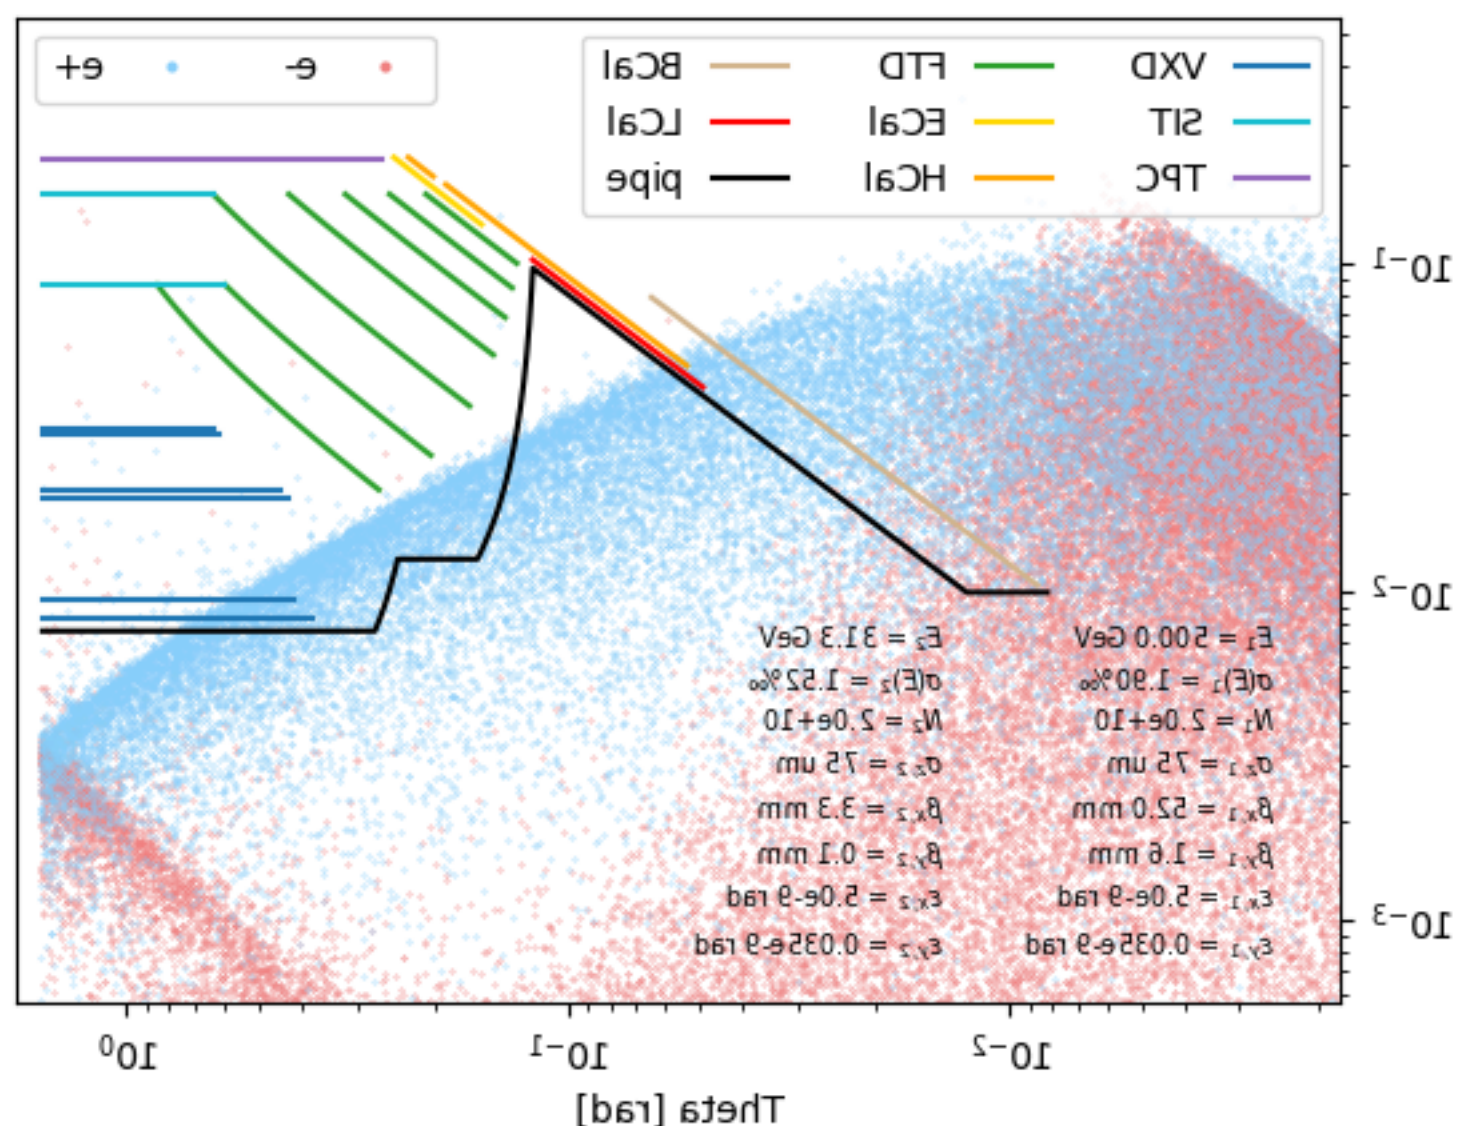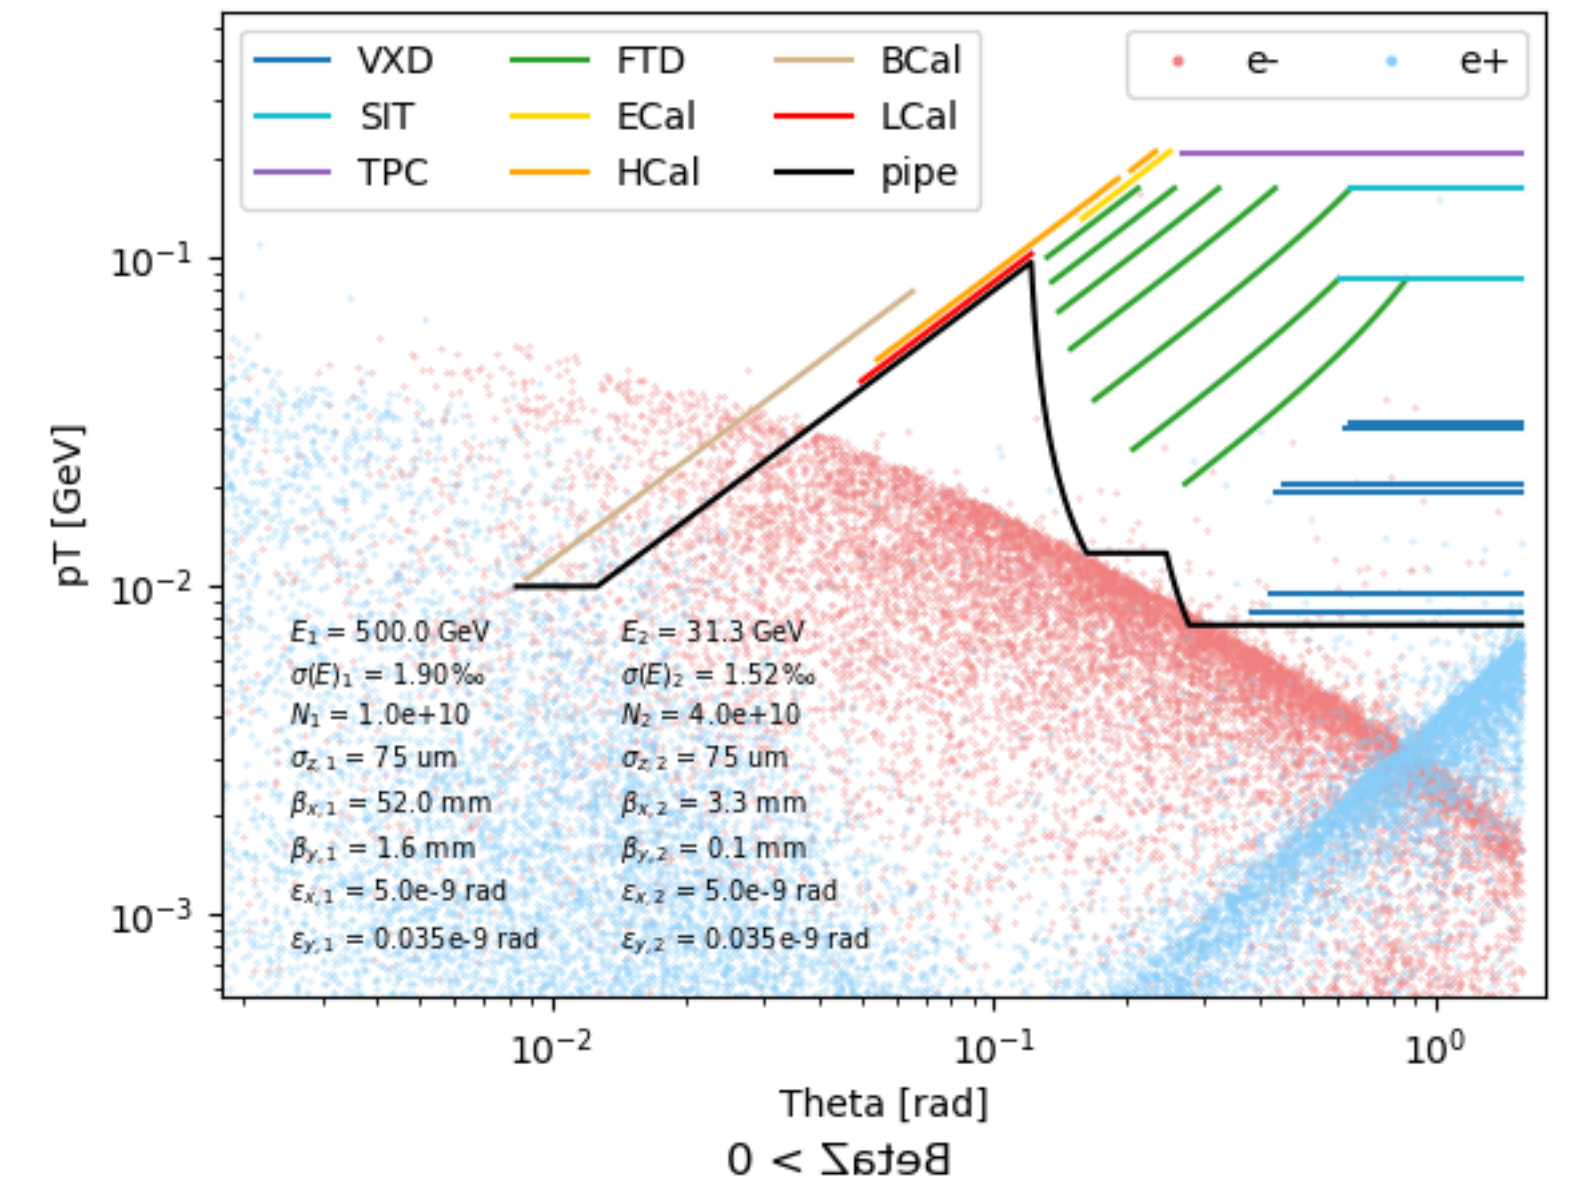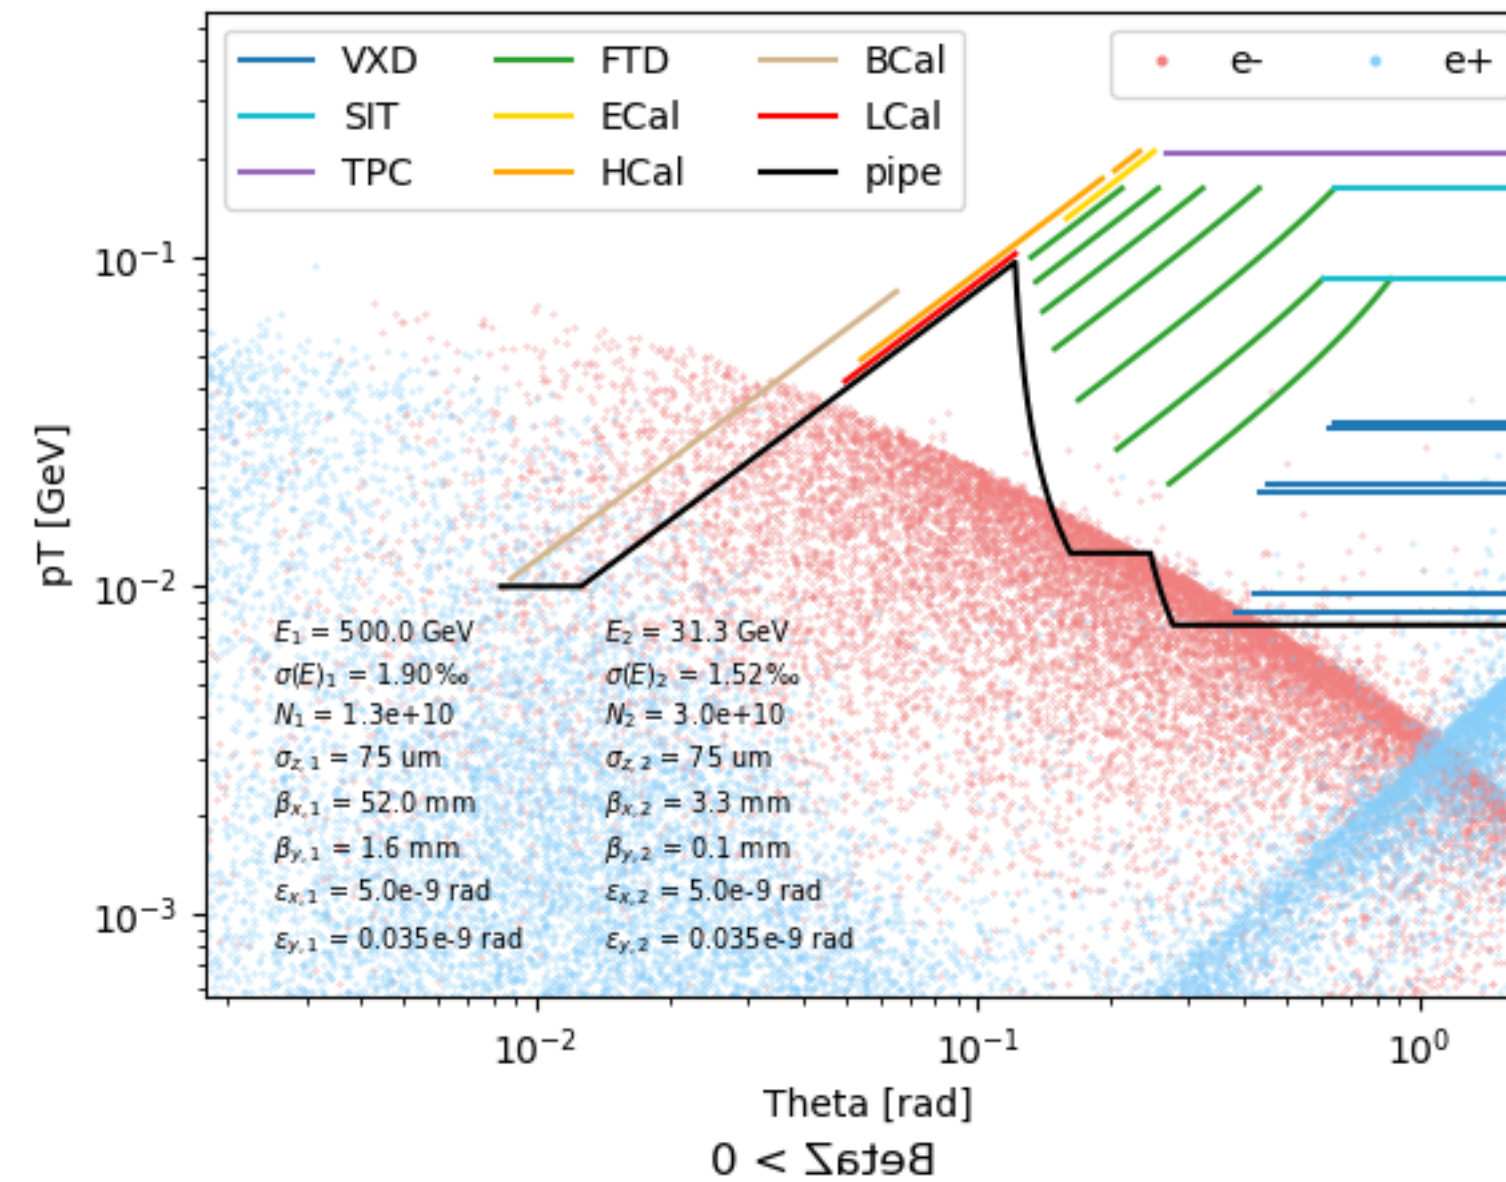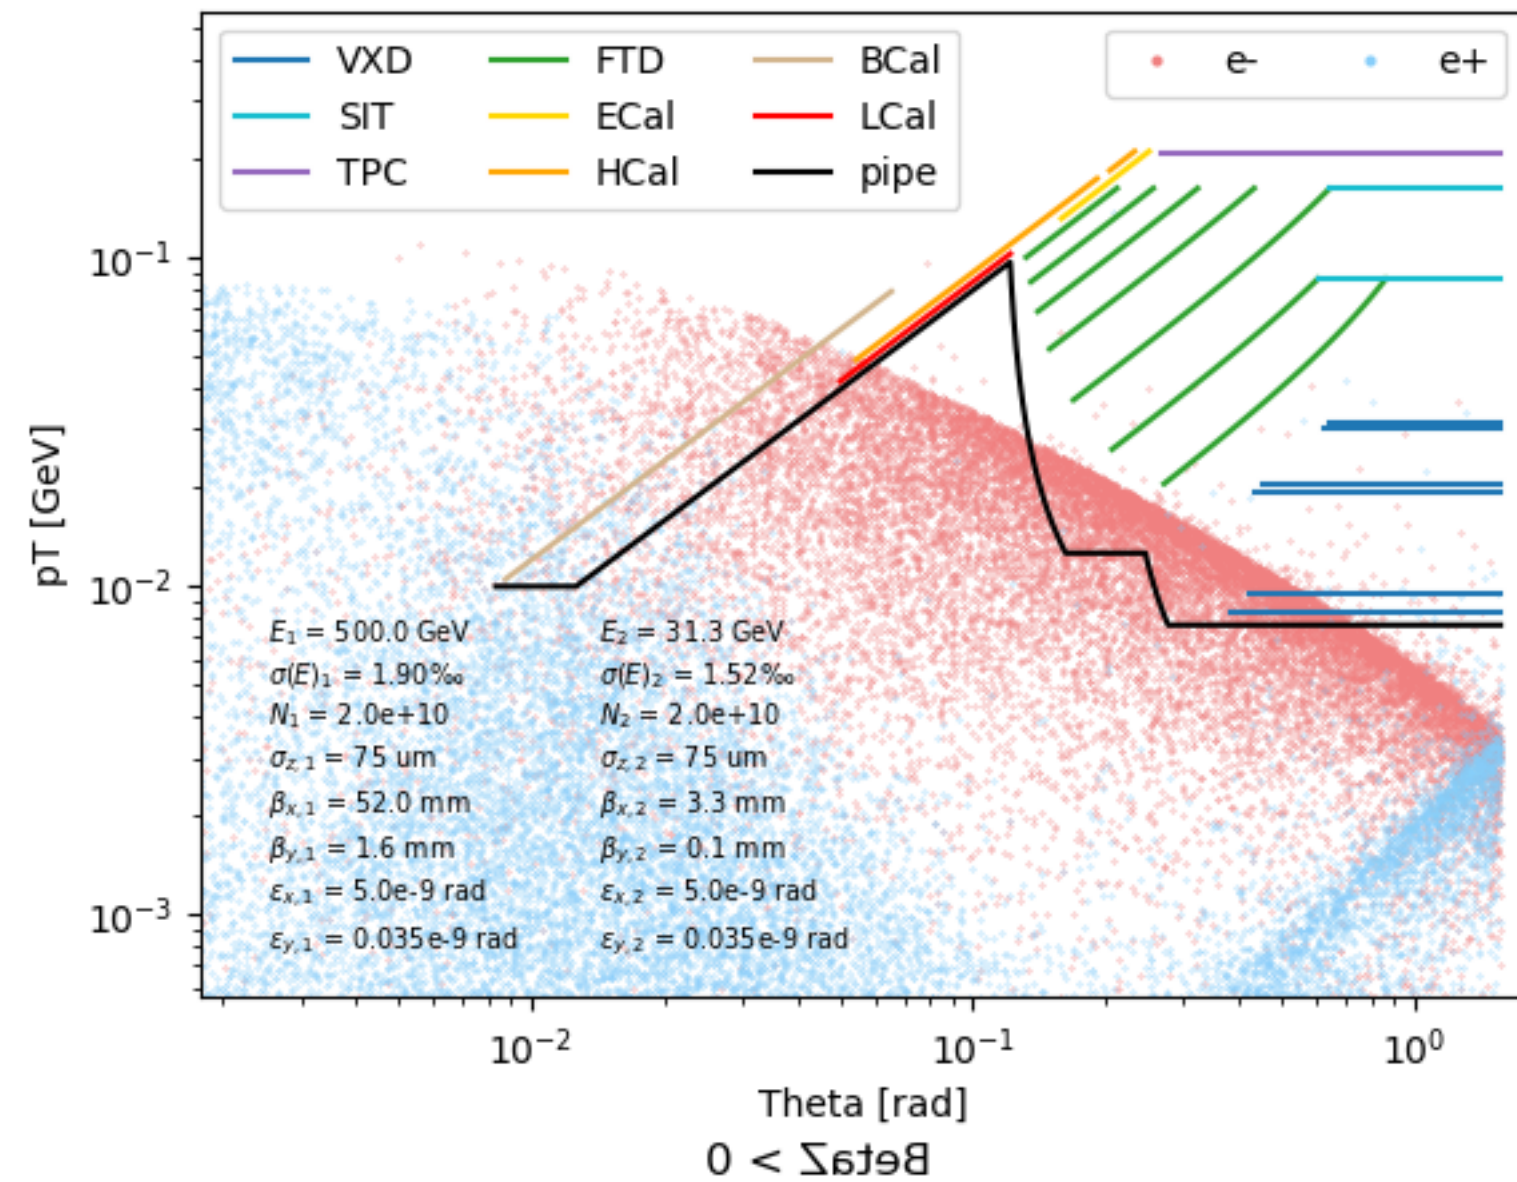

Beam background hit map, $\sigma_z = 75:300$


N = 2:2

BetaZ < 0

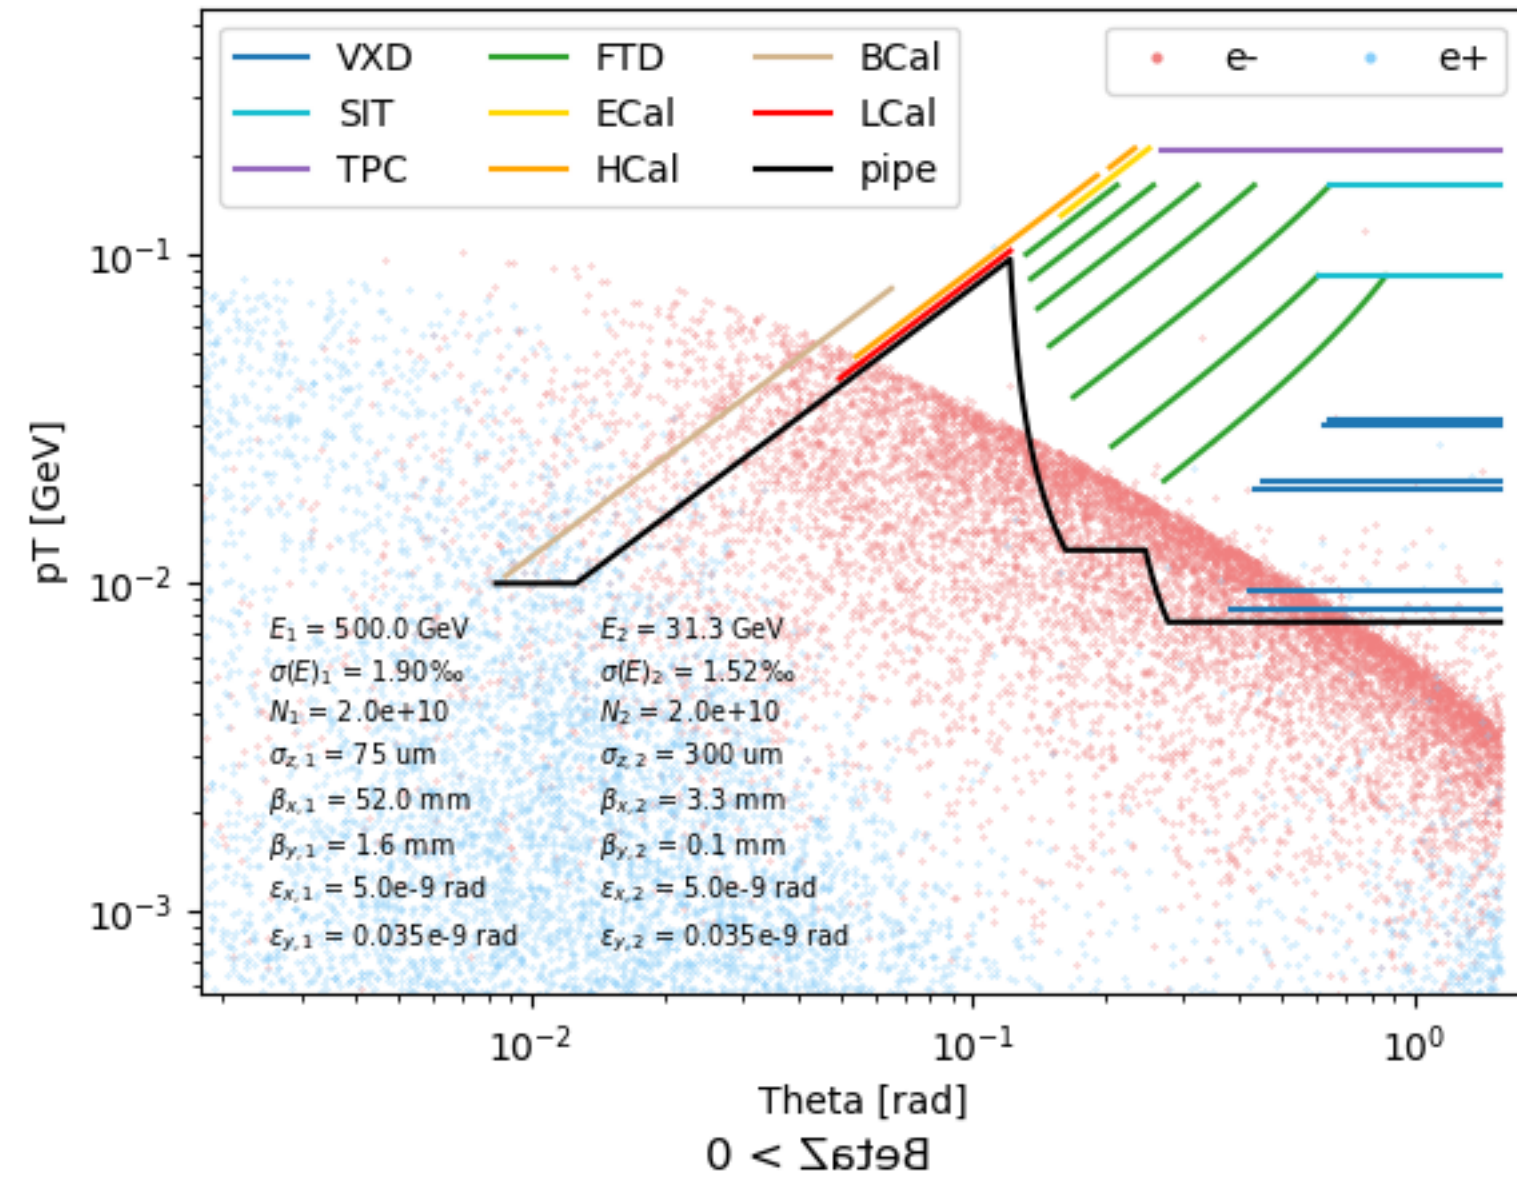





N = 1.33:3

BetaZ < 0

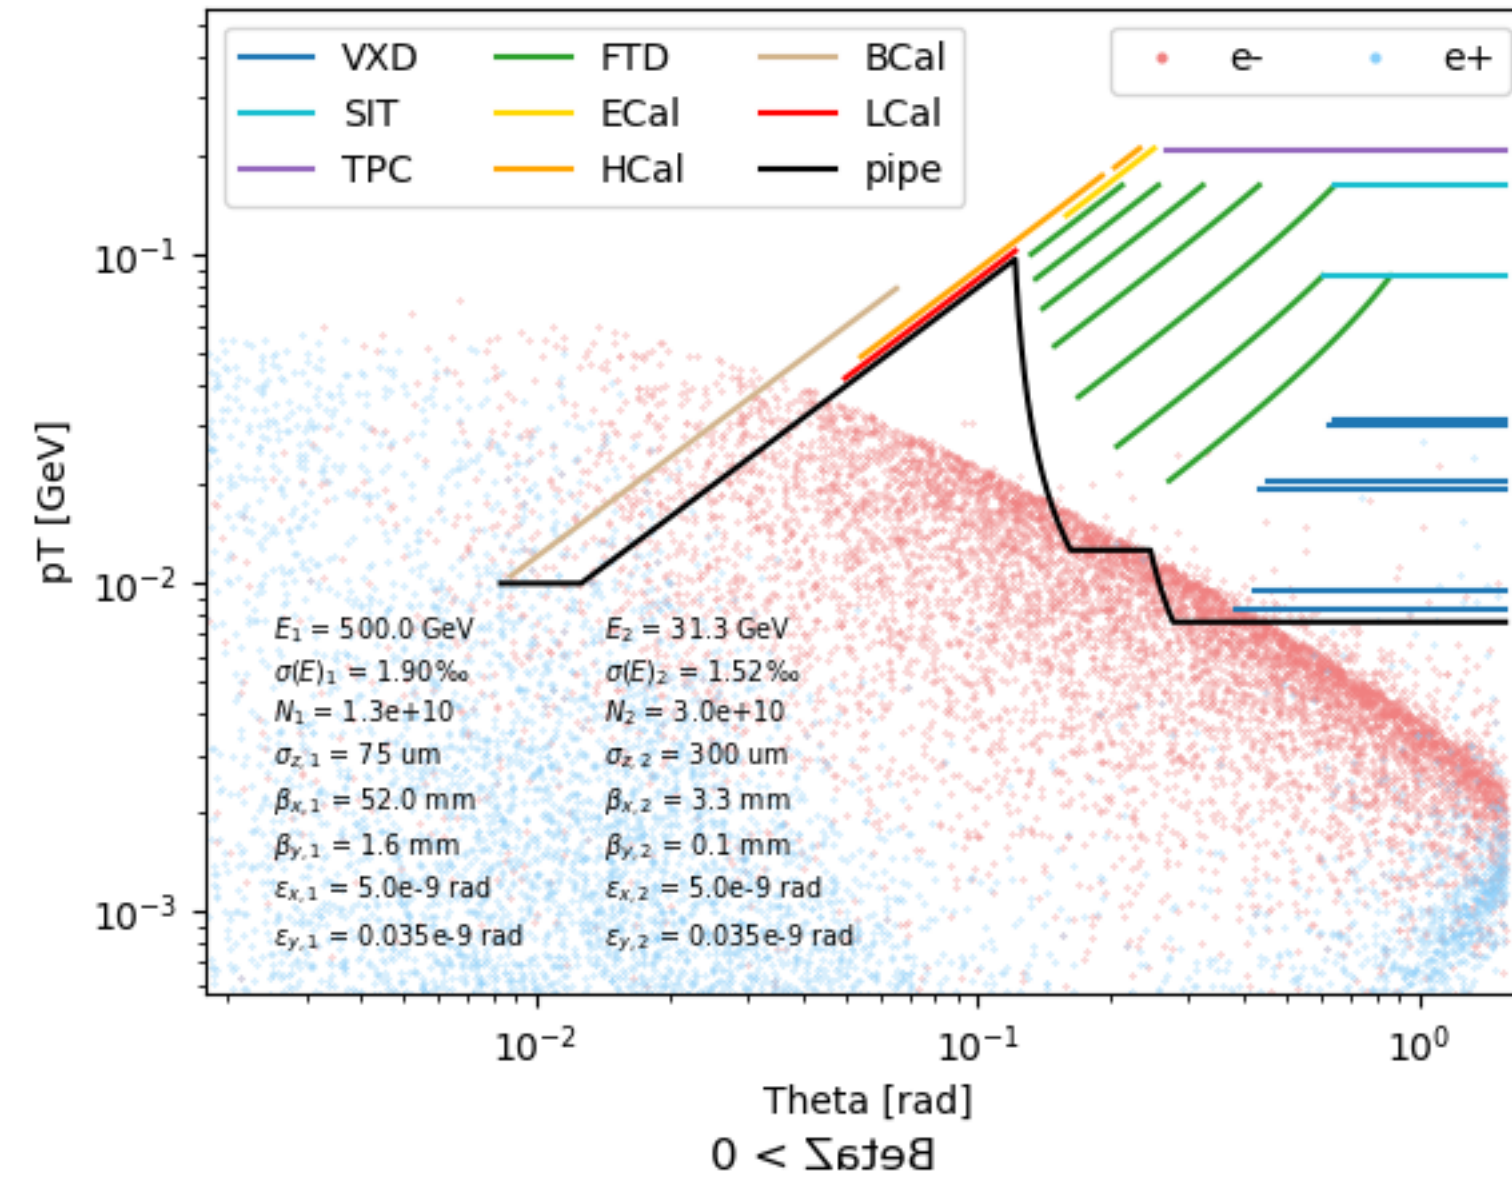


N = 1:4

BetaZ < 0

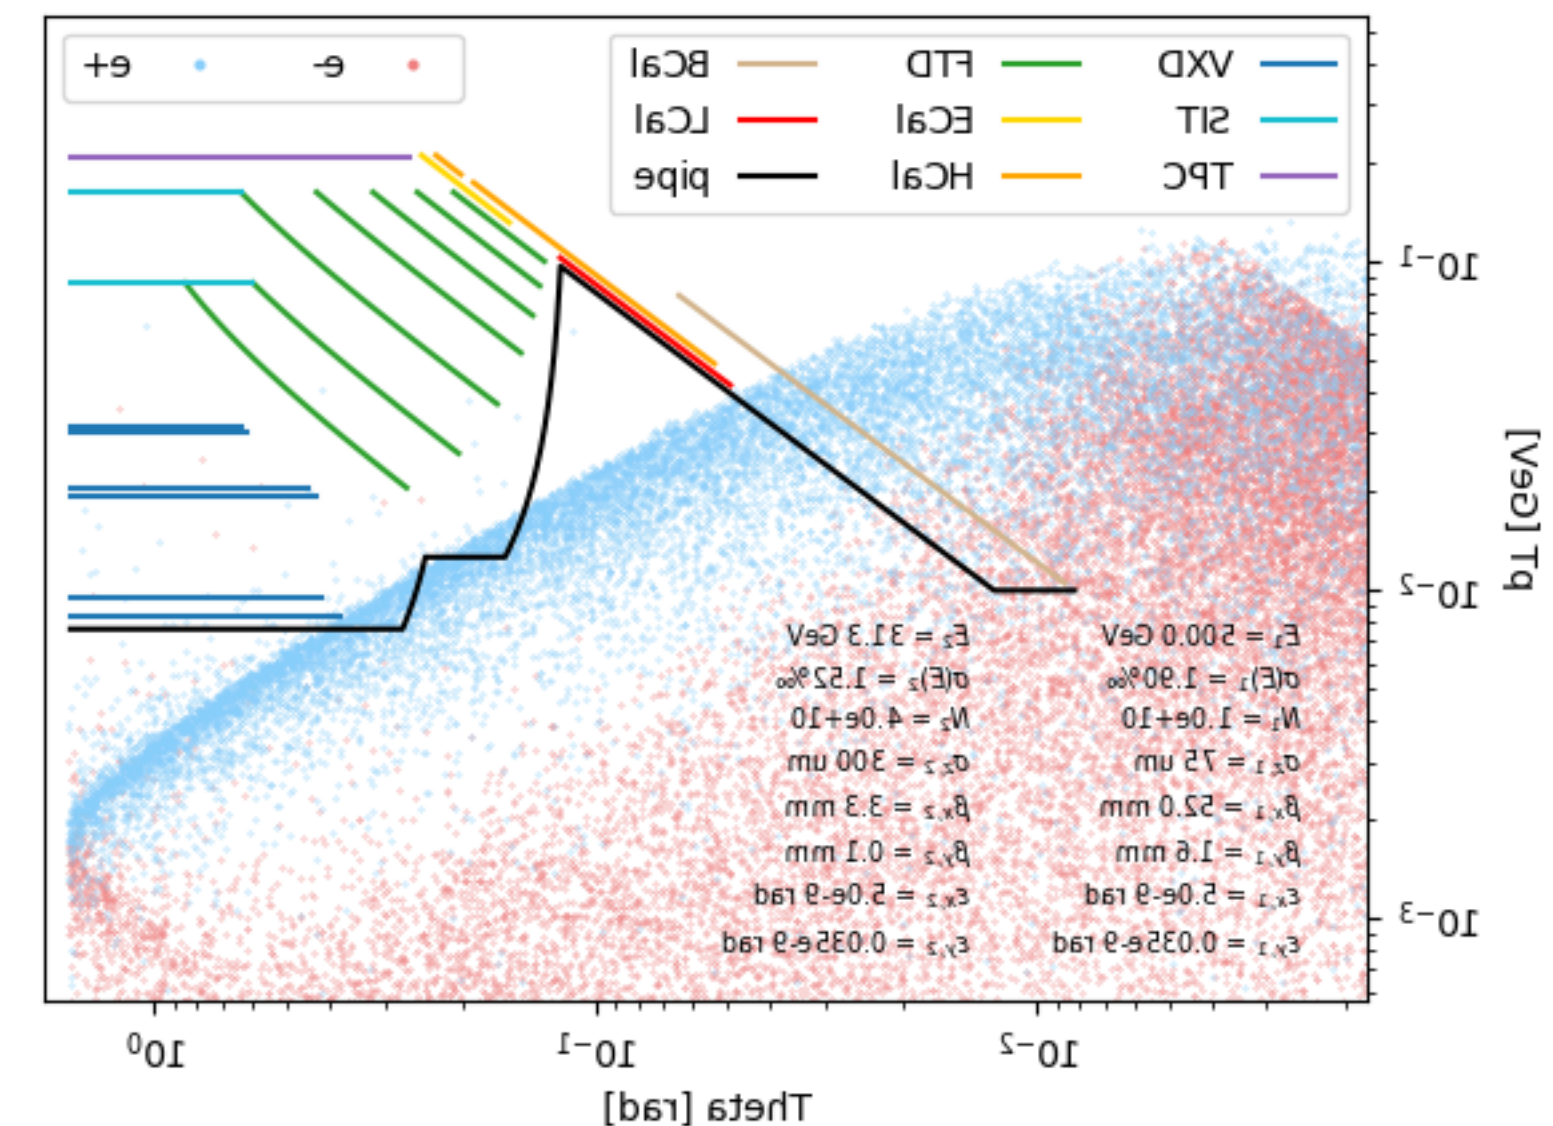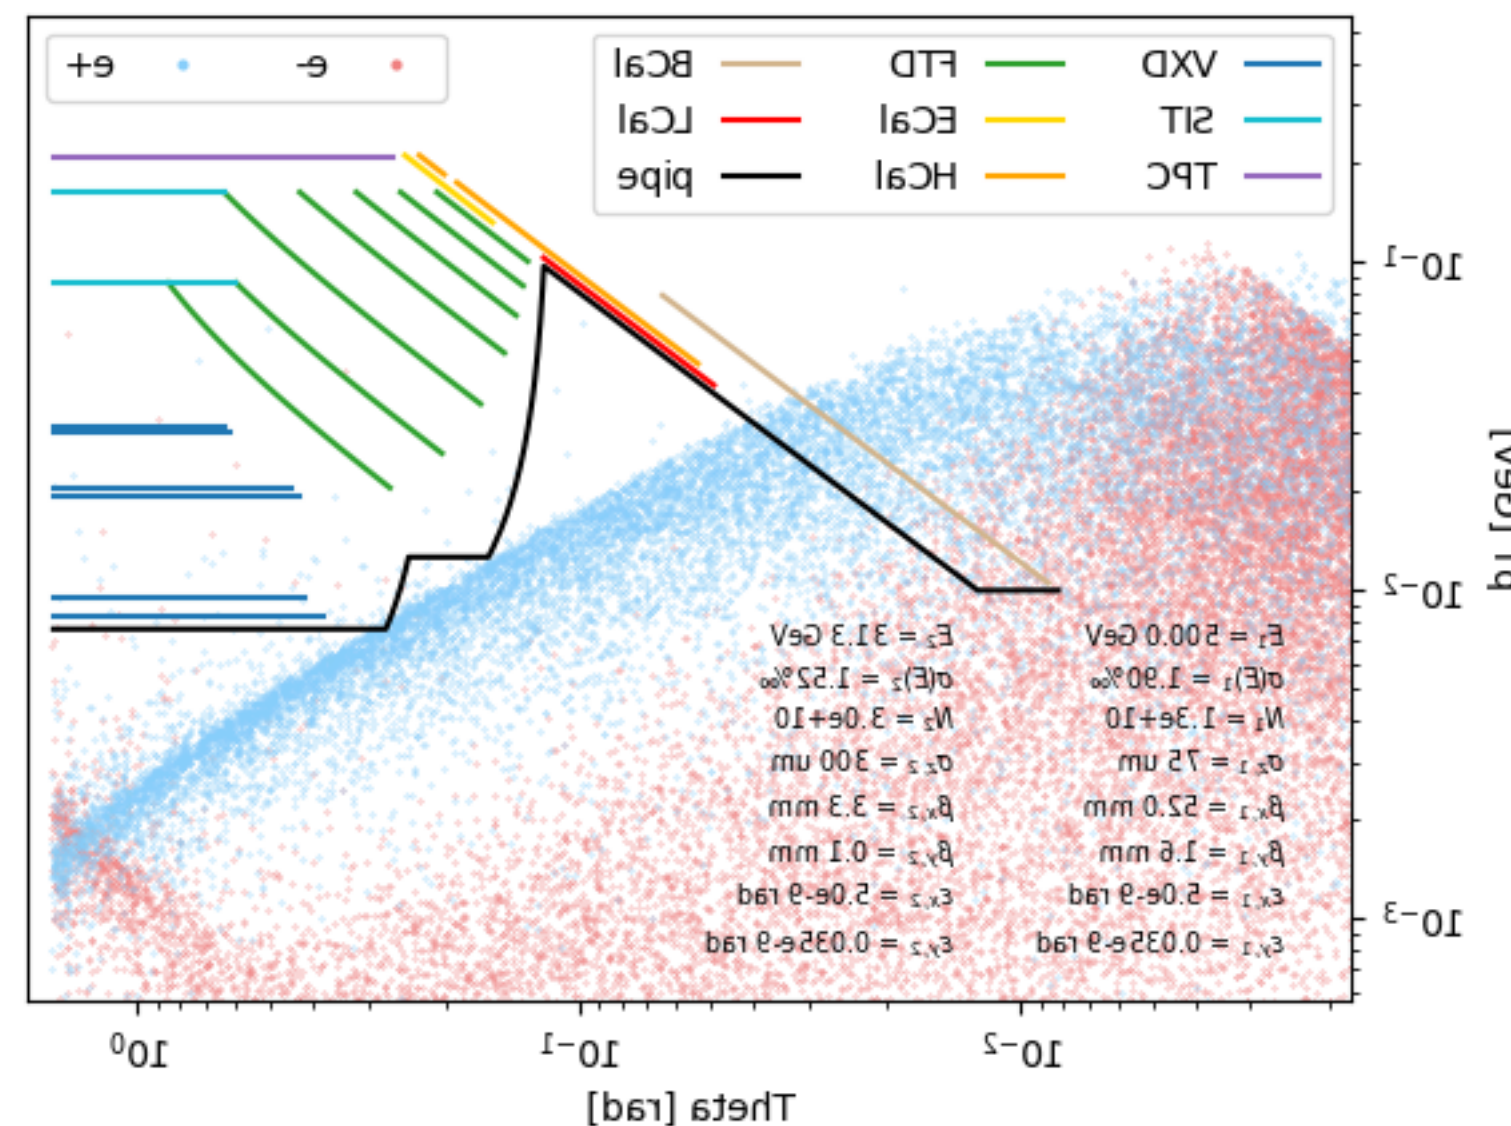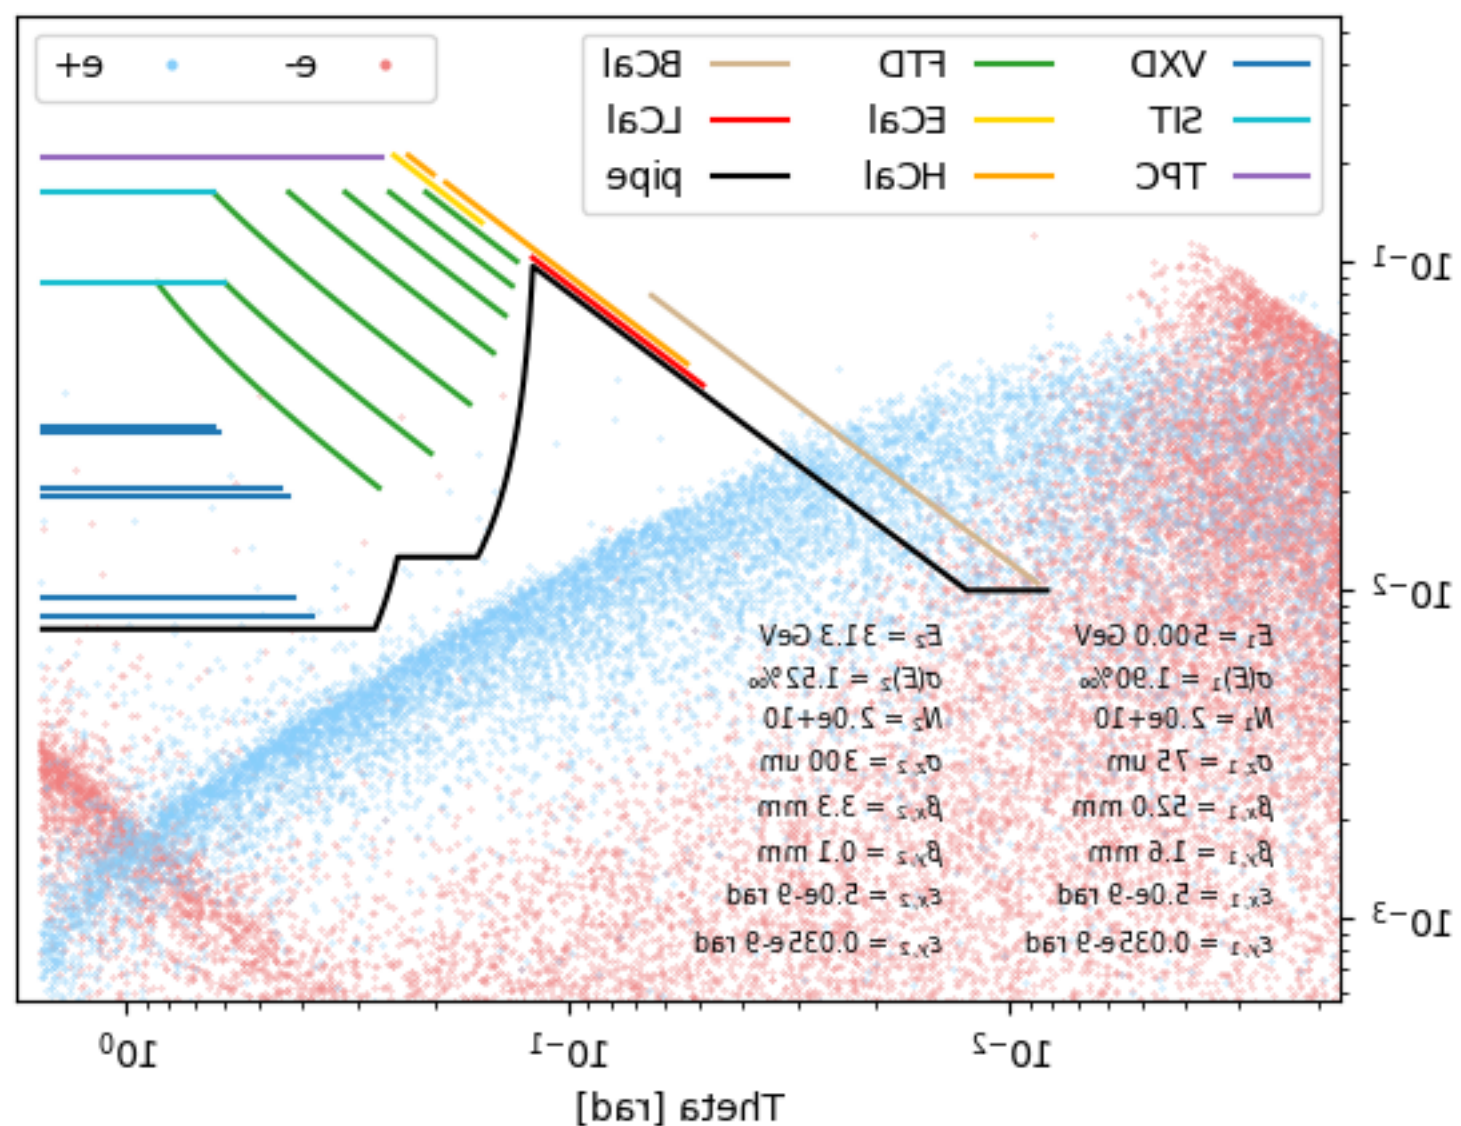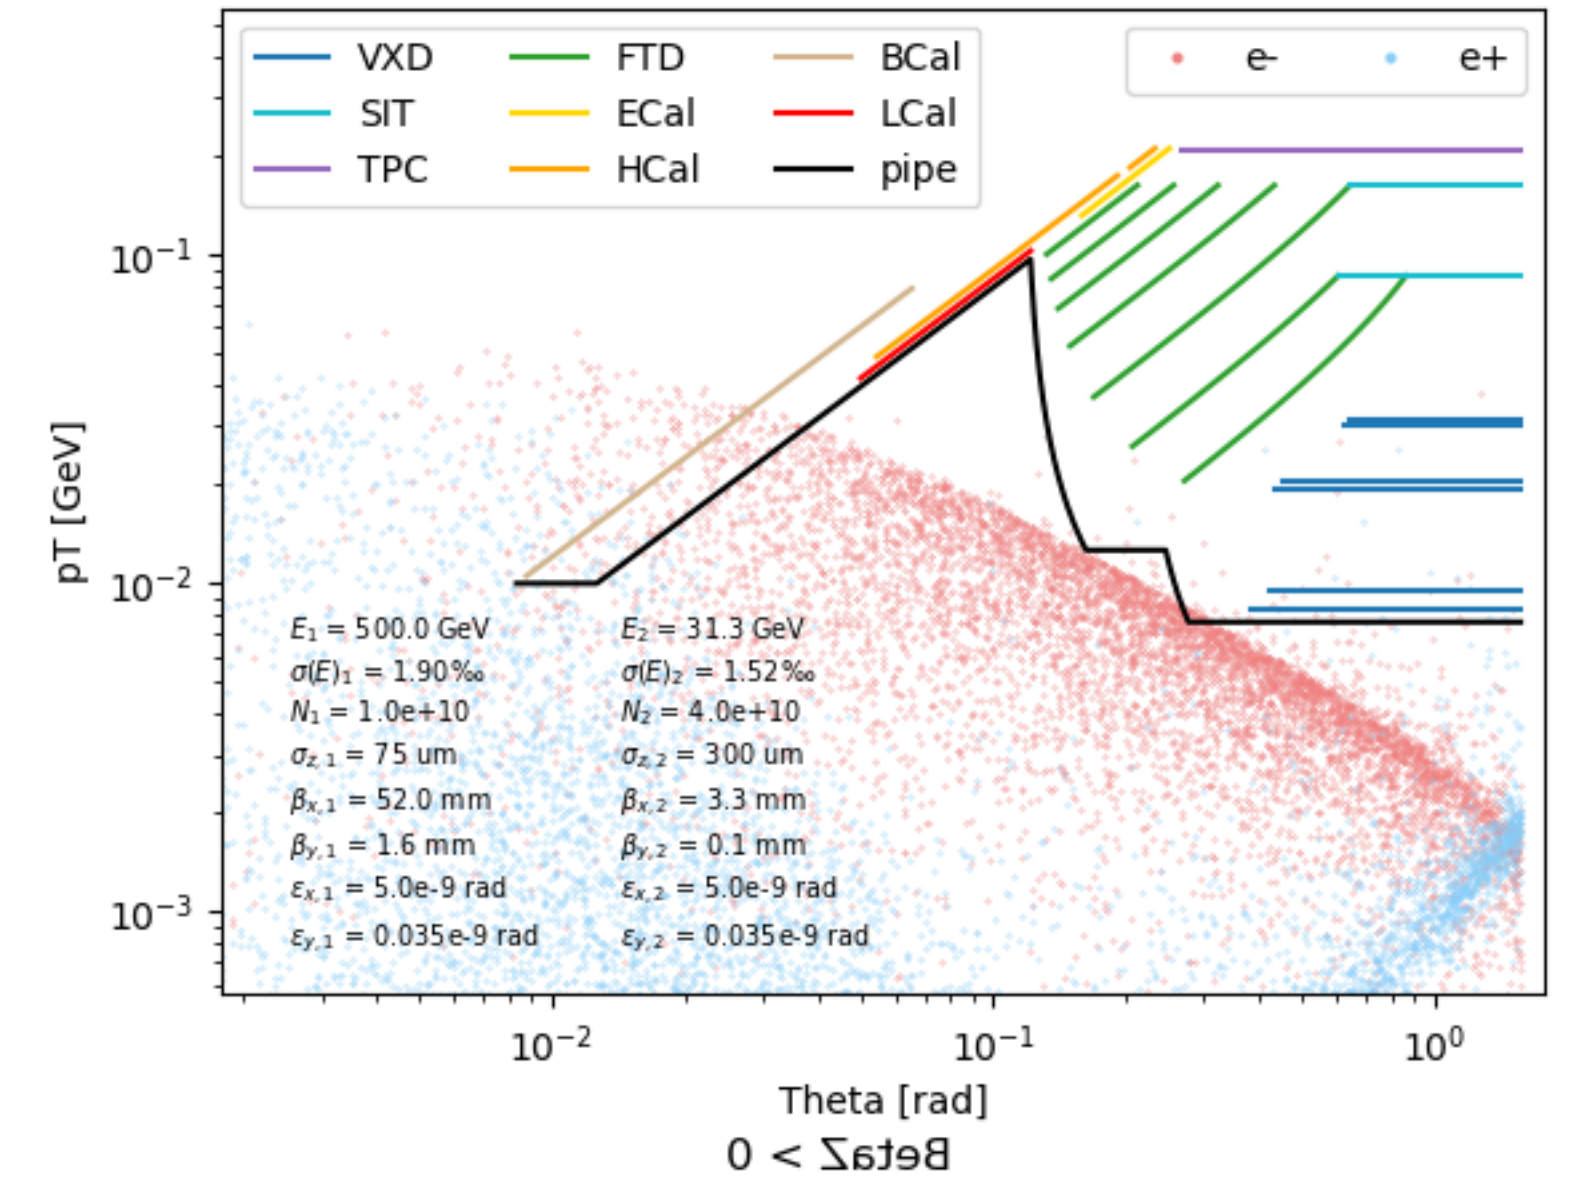


Beam background hit map, $\sigma_z = 300:300$





N = 2:2

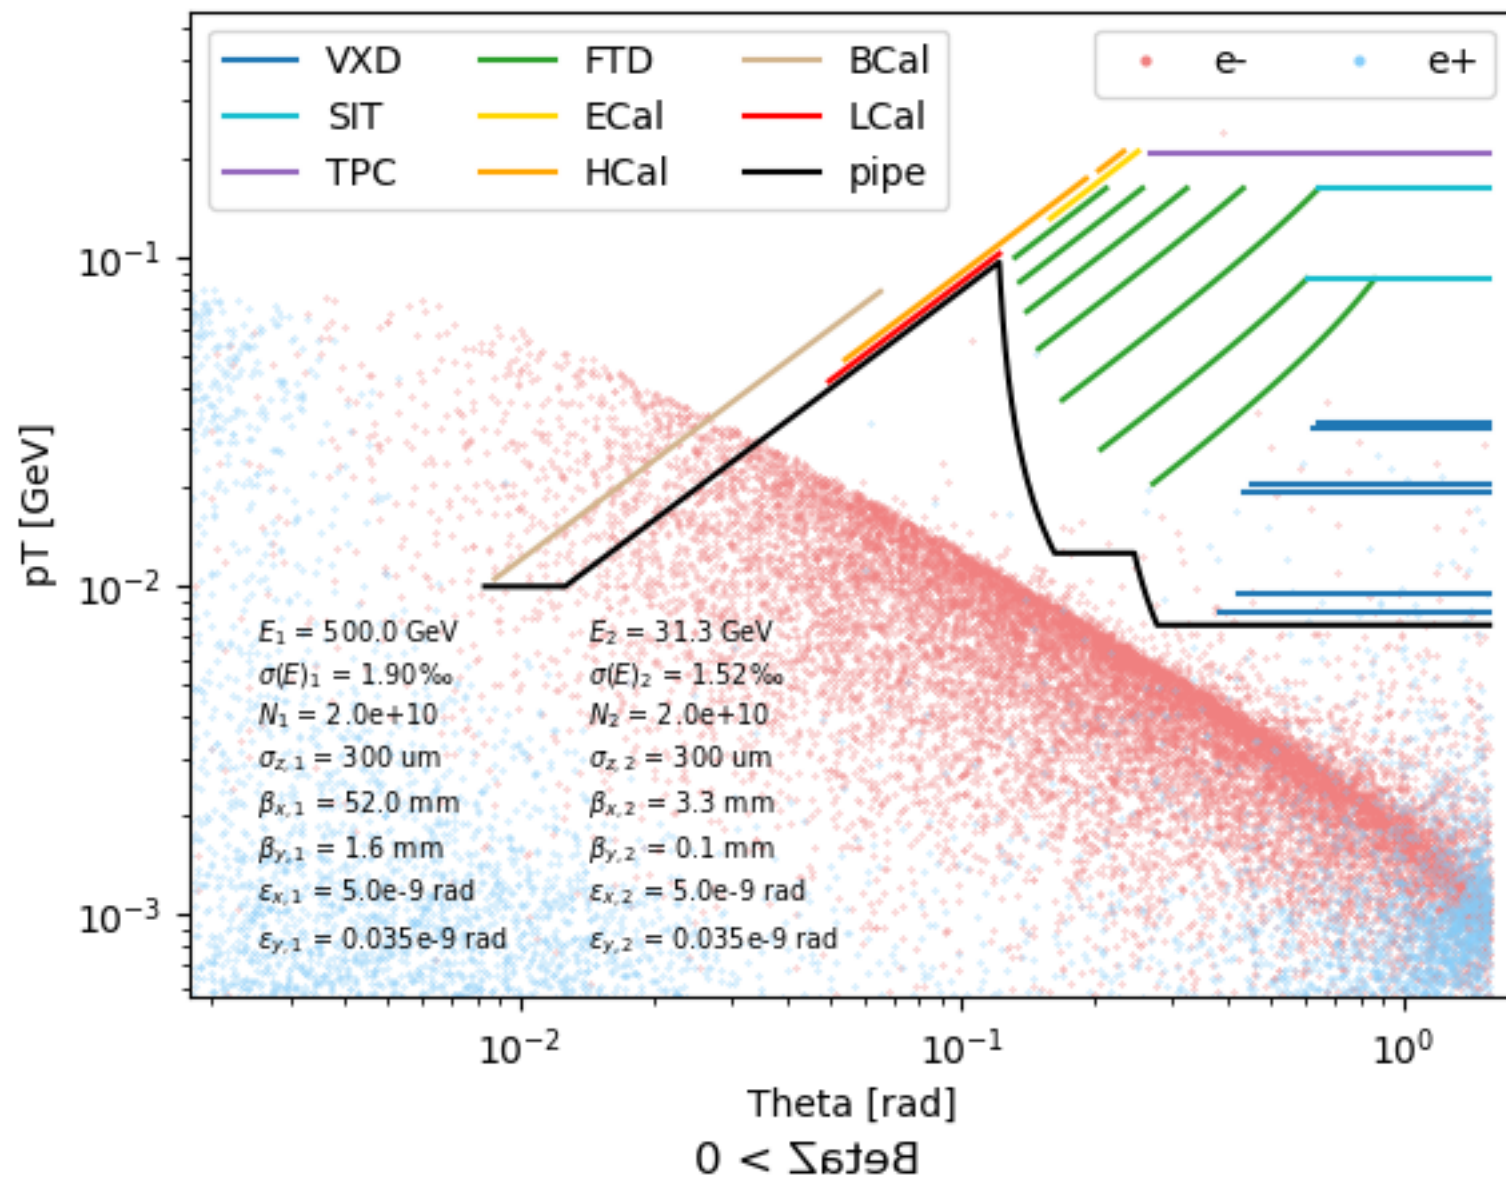

N = 1.33:3

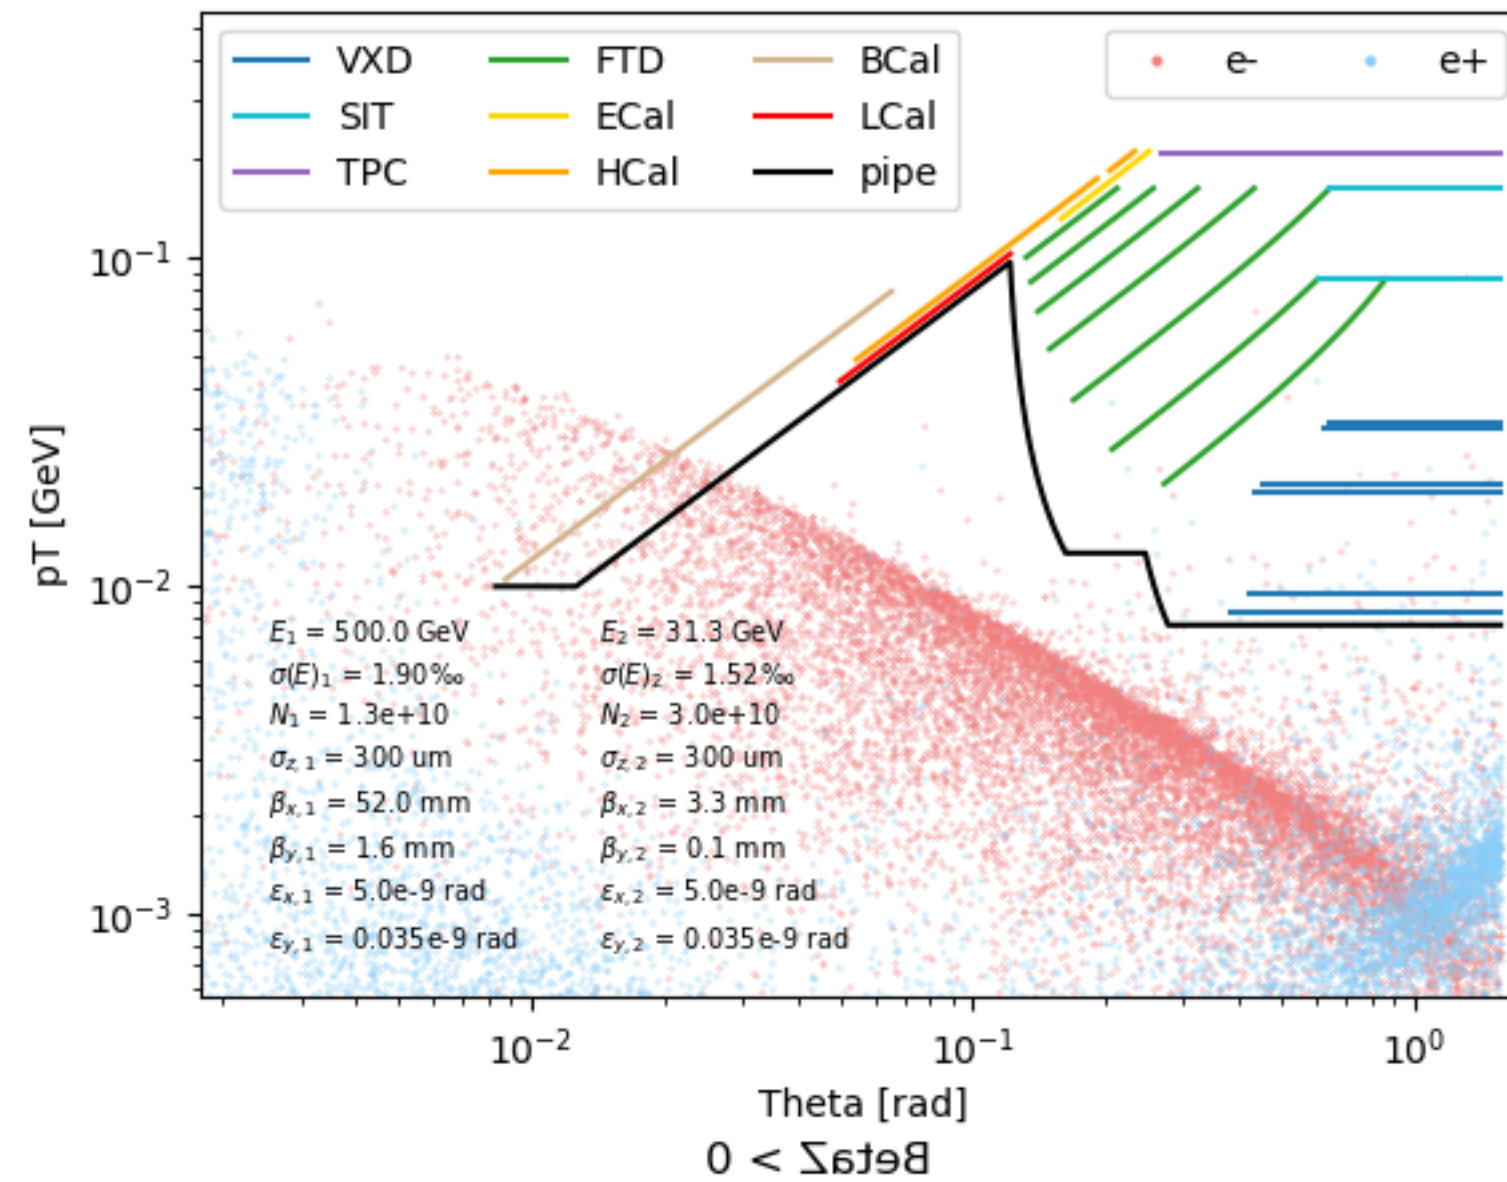

N = 1:4

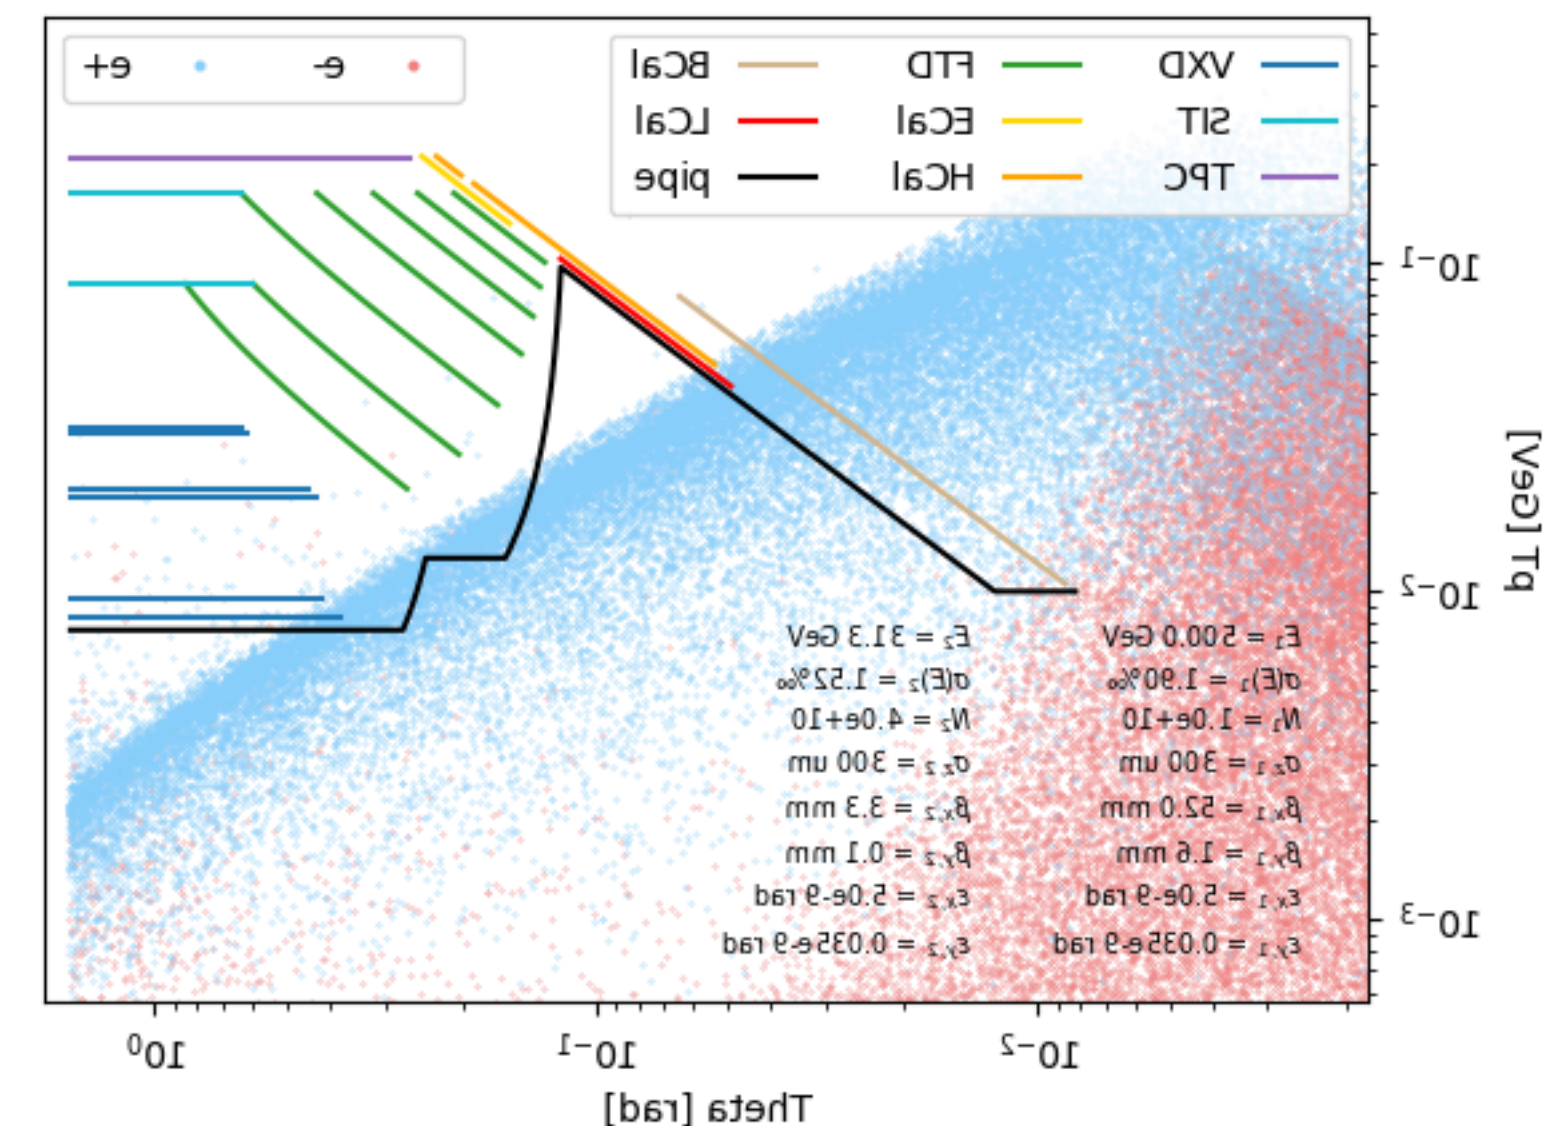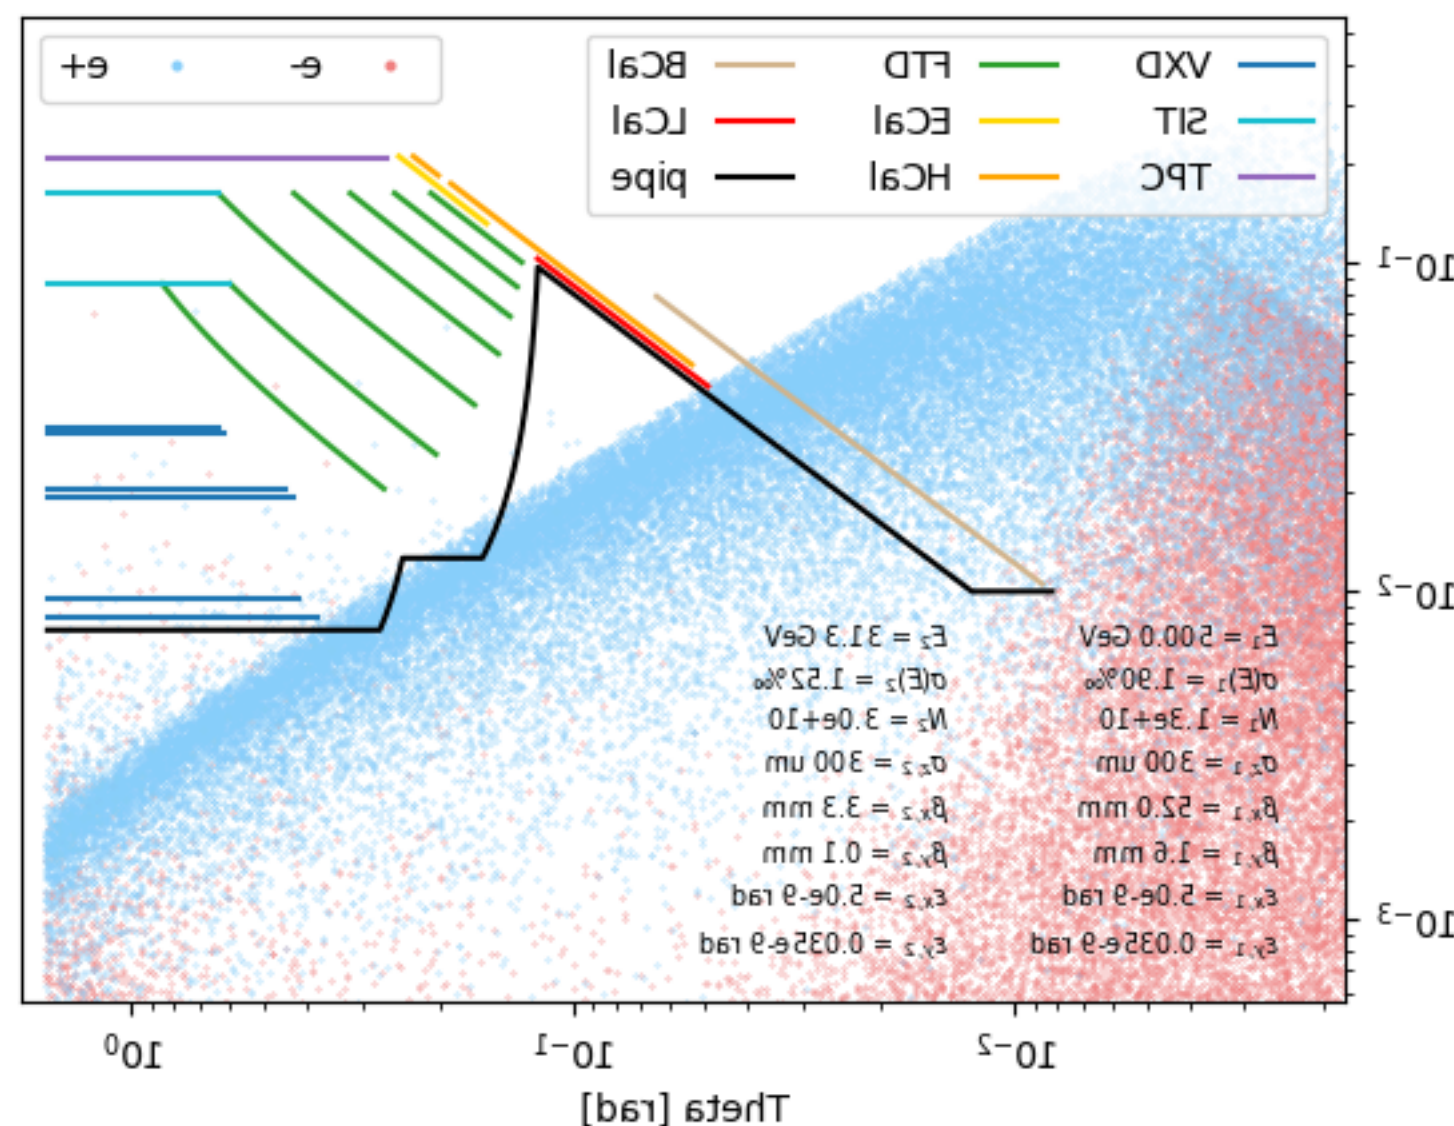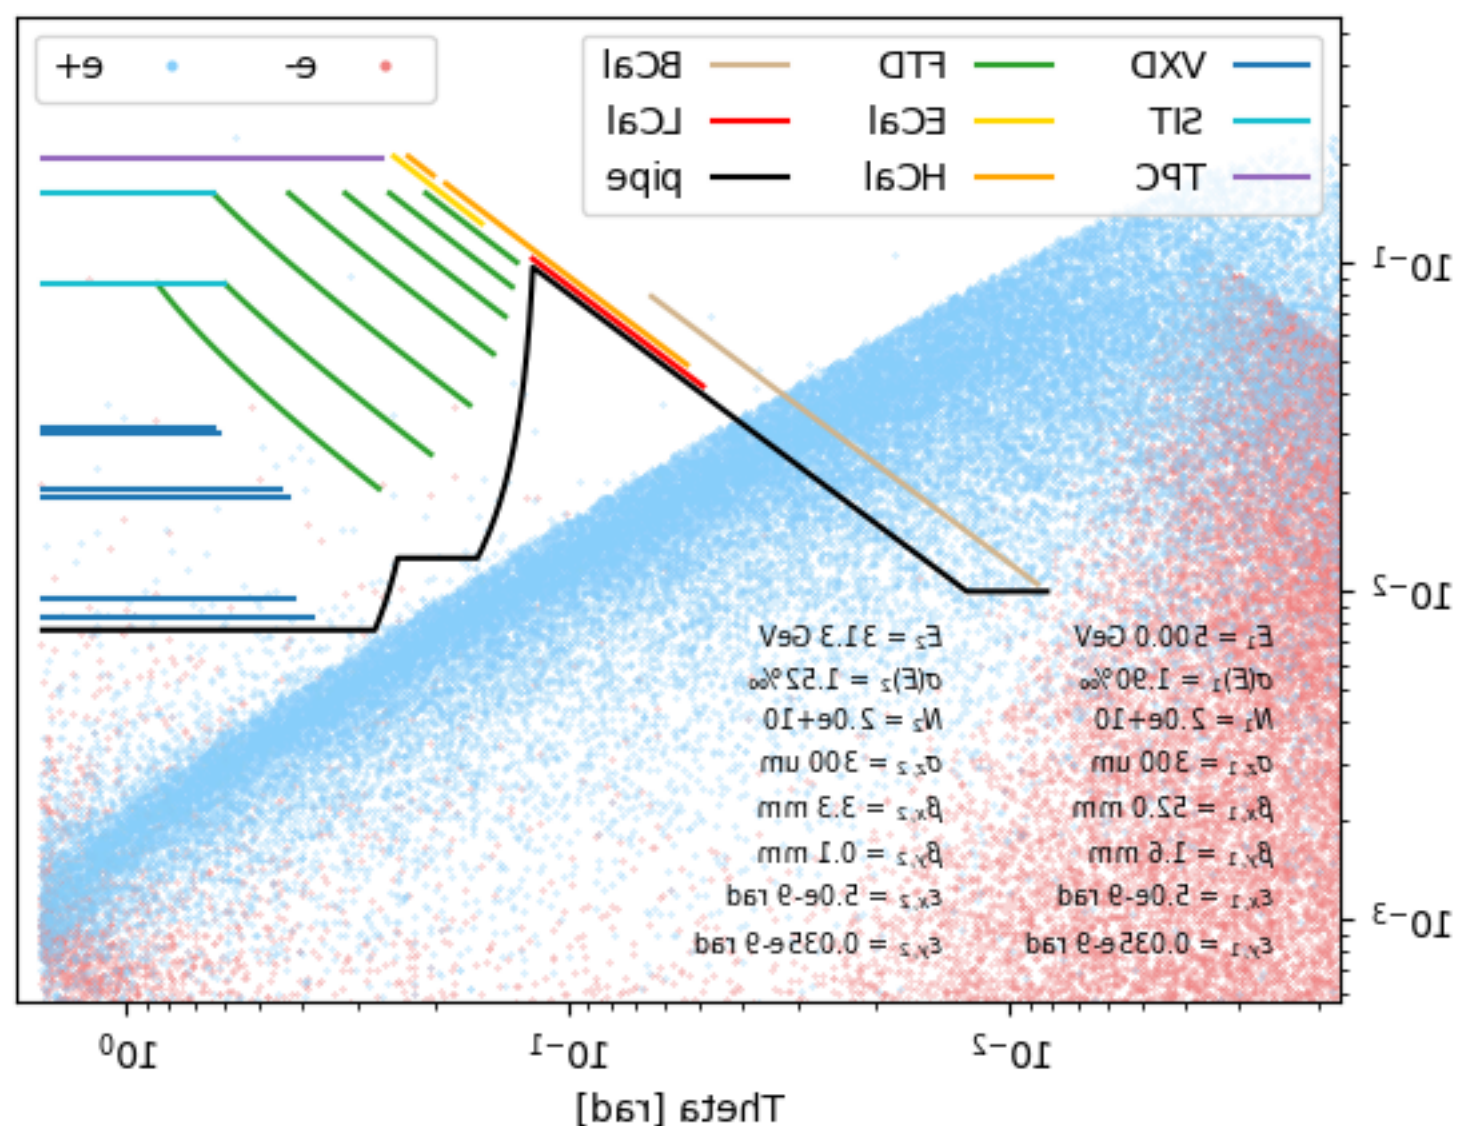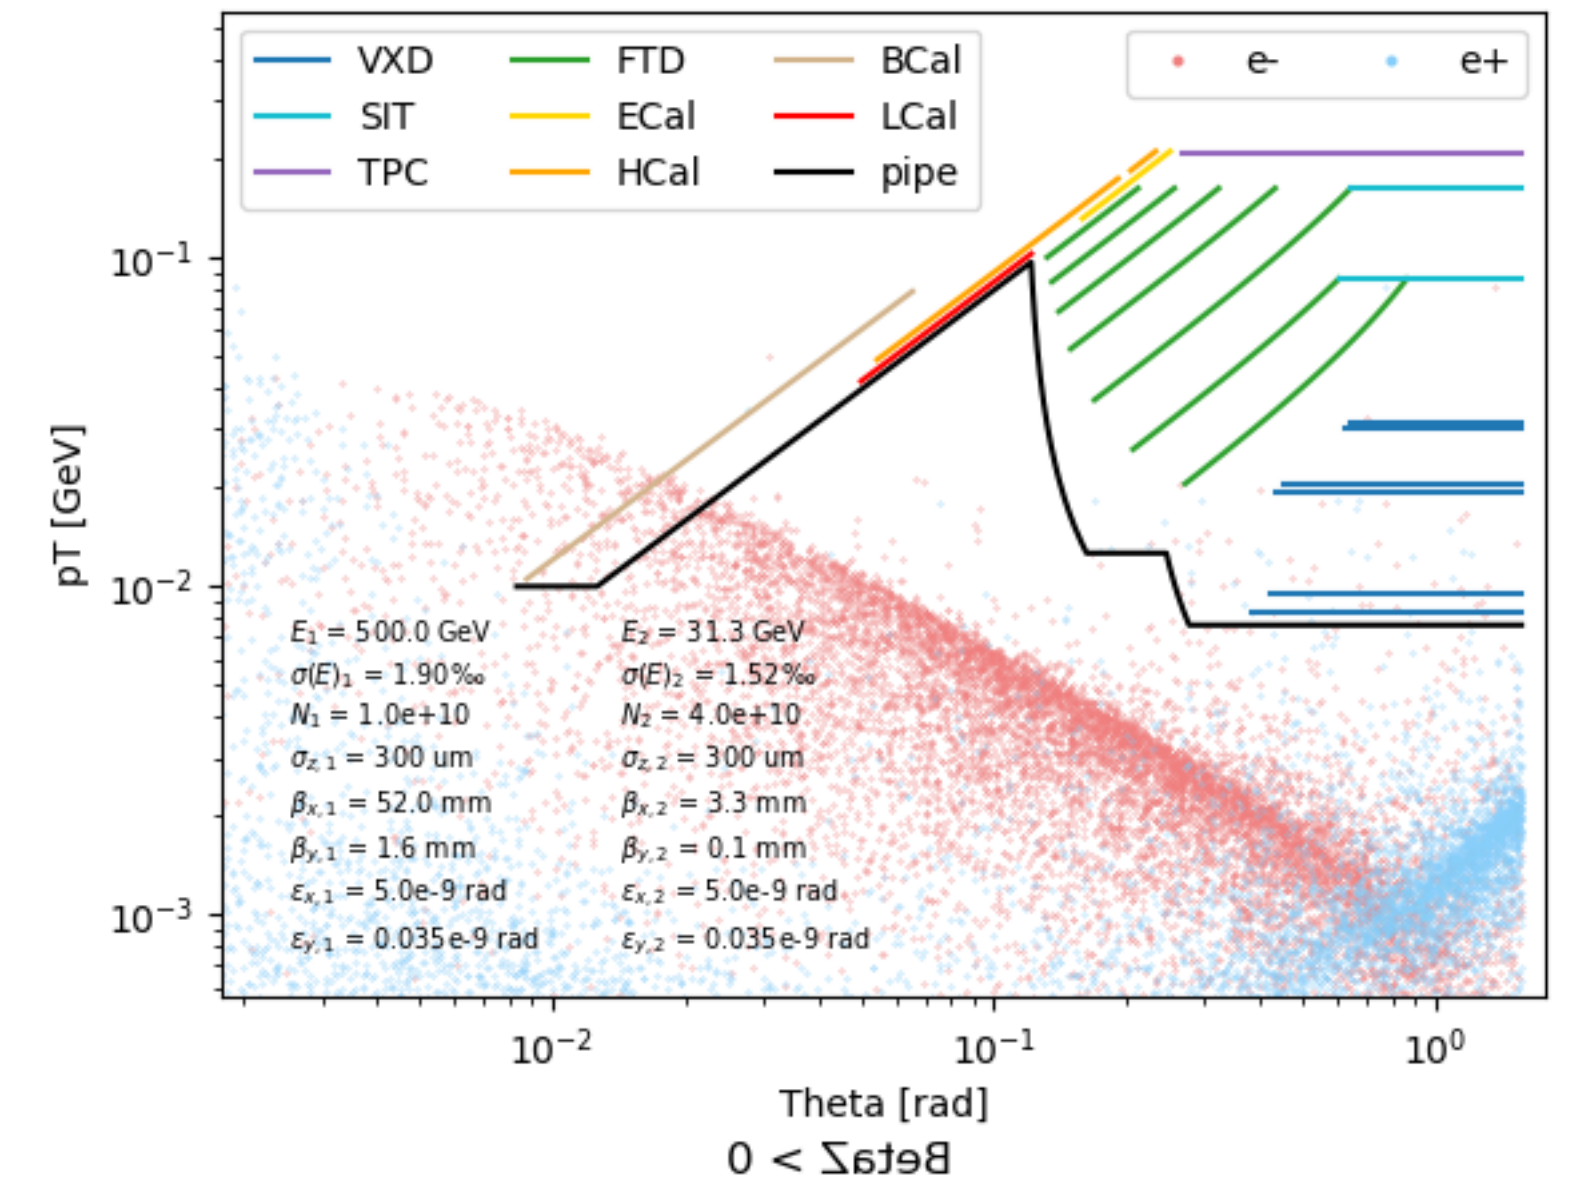

Impact of beam parameters on luminosity

The price of solving beam backgrounds...

- All points: $E_- = 500$ GeV, $E_+ = 31.3$ GeV.
- **Luminosity computed by Guinea-Pig:**
 - Total luminosity
 - Luminosity within 1% of the nominal CM energy ("peak lumi").

