



Funded by the European Union (EU). Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the EU or European Research Executive Agency (REA). Neither the EU nor the REA can be held responsible for them.



Magnets

Timeline, Cost and R&D Plan

L. Bottura¹, F. Boattini¹, B. Bordini¹, B. Caiffi², S. Fabbri¹, S. Mariotto^{3,4}, M. Statera³


¹ CERN, ² INFN – Genova, ³ INFN – Milano, ⁴ University of Milan



International
MUON Collider
Collaboration



OUTLINE

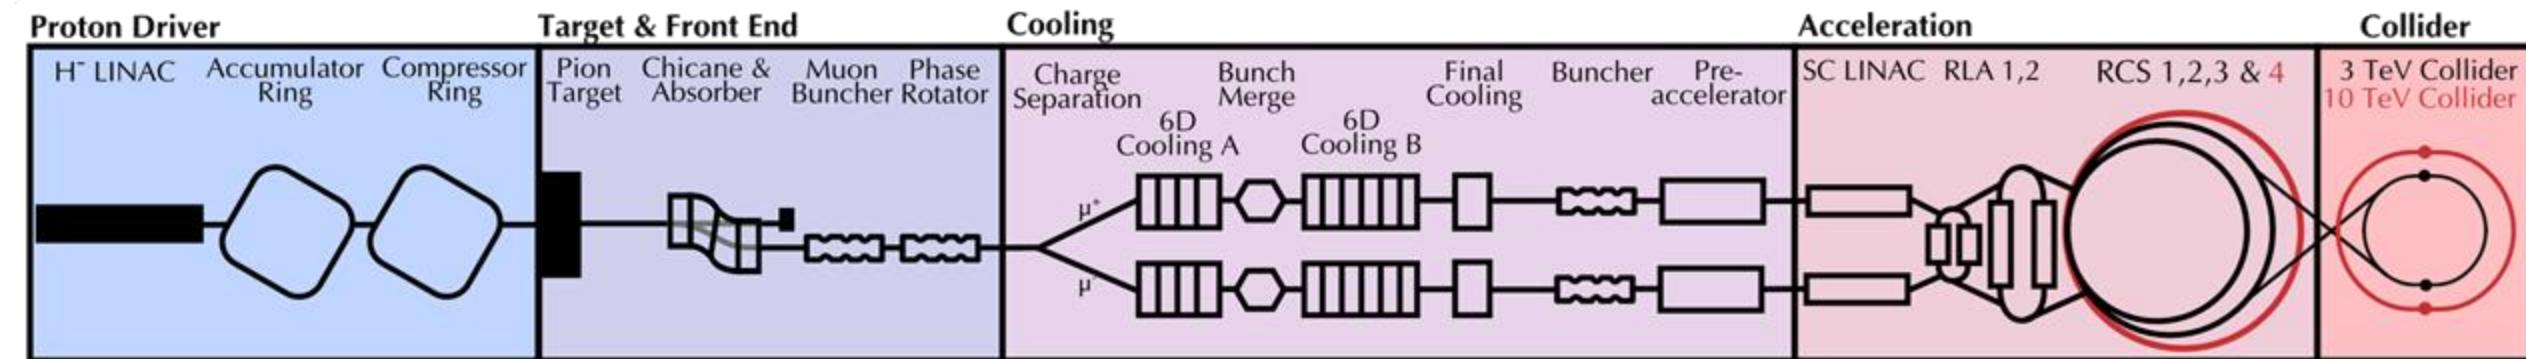


- References
- Magnet timeline
- R&D plan
- Cost evaluation
- Summary and discussion points



International
MUON Collider
Collaboration



OUTLINE

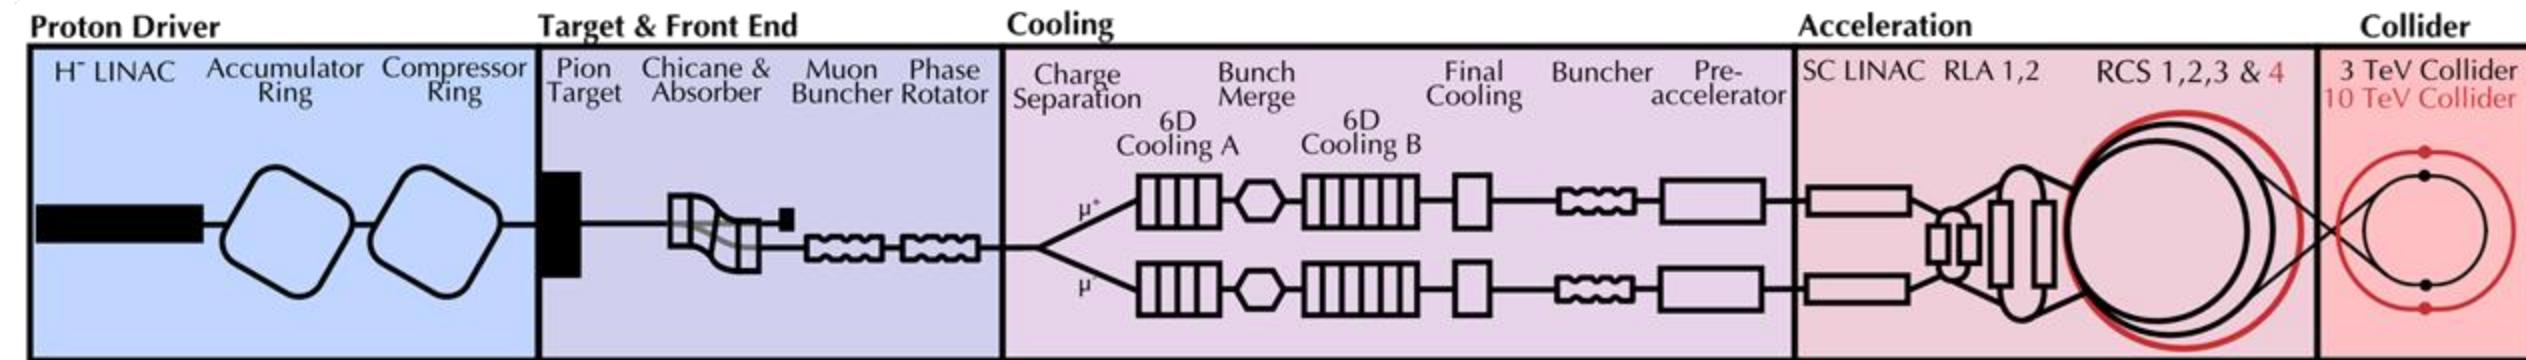

- References
- Magnet timeline
- R&D plan
- Cost evaluation
- Summary and discussion points

REFERENCES

The Muon Collider

402 pages

Supplementary report to the European Strategy for Particle Physics - 2026 update



31 March 2025

EDMS: 3284315

arXiv: 2503.21185

The International Muon Collider Collaboration

The material presented here is
detailed and discussed
extensively in the documents
prepared for submission to the
2026 ESPPU process

11 pages

Magnet R&D for the Muon Collider
European Strategy Input

L. Bottura, B. Auchmann, F. Boattini, B. Bordini, B. Caiffi, L. Cooley, S. Fabbri, S. Gourlay, S. Mariotto, T. Nakamoto, S. Prestemon, M. Statera

31 March 2025

EDMS: 3231359

arXiv: 2503.21179


Much space and attention was
given to building a bottom-up
and analytical R&D program

42 pages

Magnet R&D for the Muon Collider


L. Bottura, B. Auchmann, F. Boattini, B. Bordini, B. Caiffi, L. Cooley, S. Fabbri, S. Gourlay, S. Mariotto, T. Nakamoto, S. Prestemon, M. Statera

OUTLINE

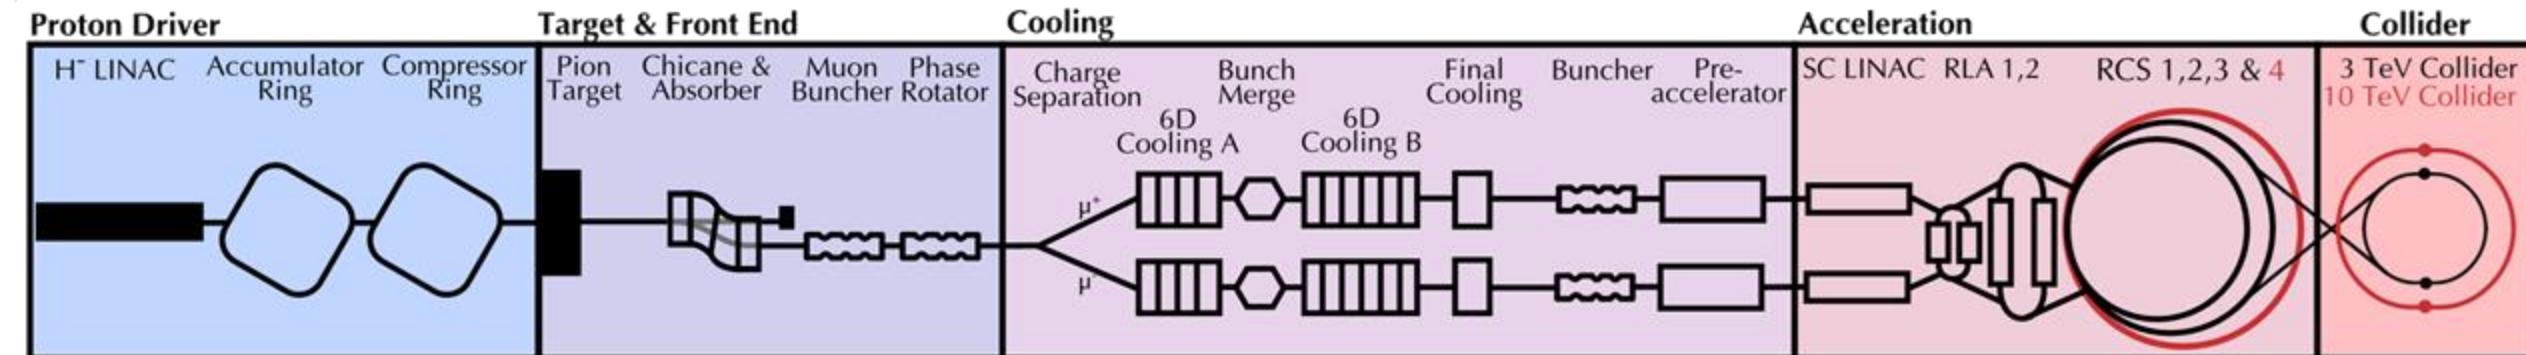


- References
- Magnet timeline
- R&D plan
- Cost evaluation
- Summary and discussion points

PROJECT TIMELINE

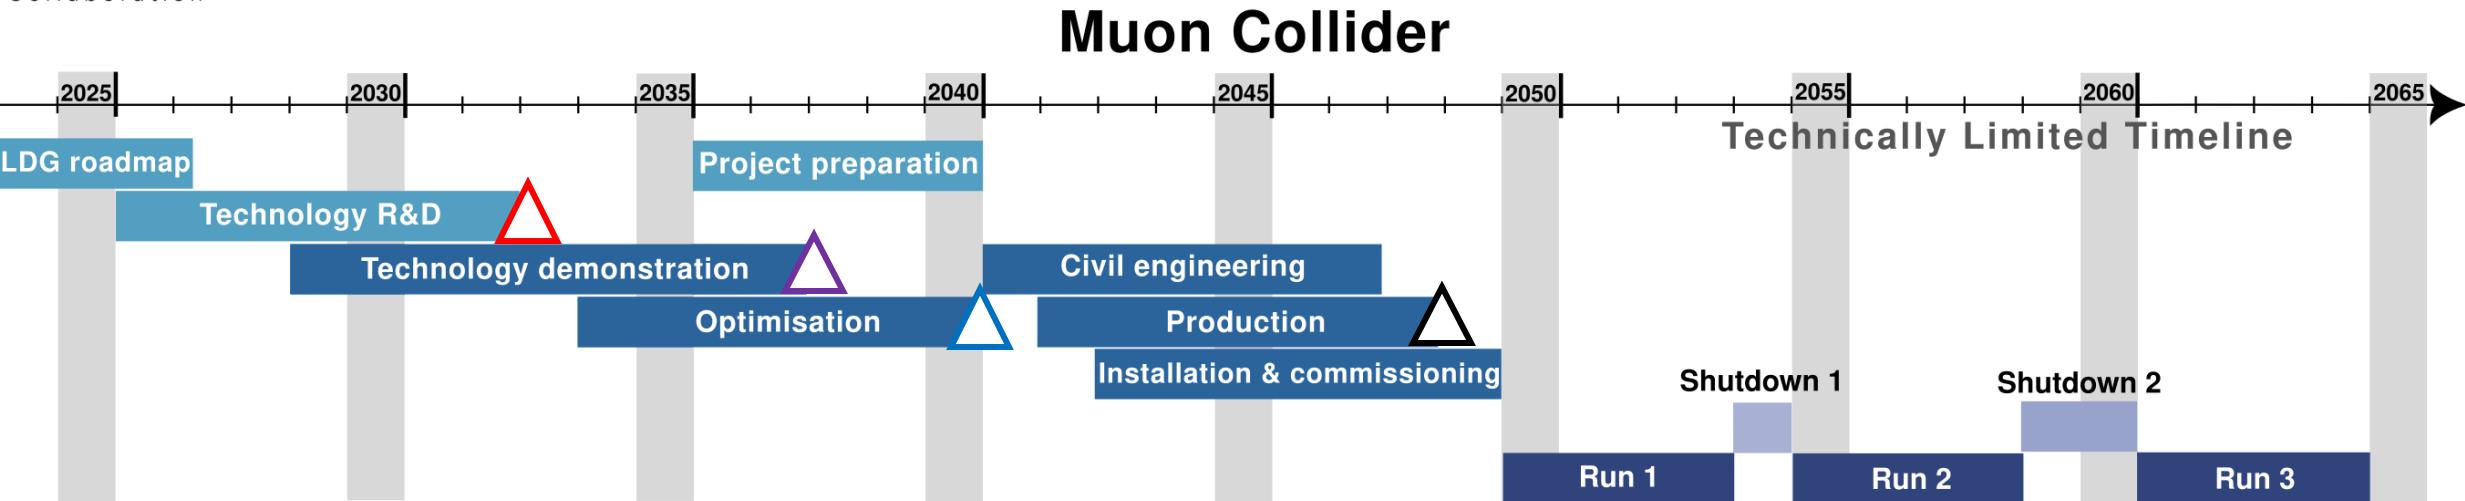


- Technology R&D completed: 2032
- Demonstrators built and tested: 2037
- Prototypes and industrialization (Optimisation): 2040
- Production completed: 2048

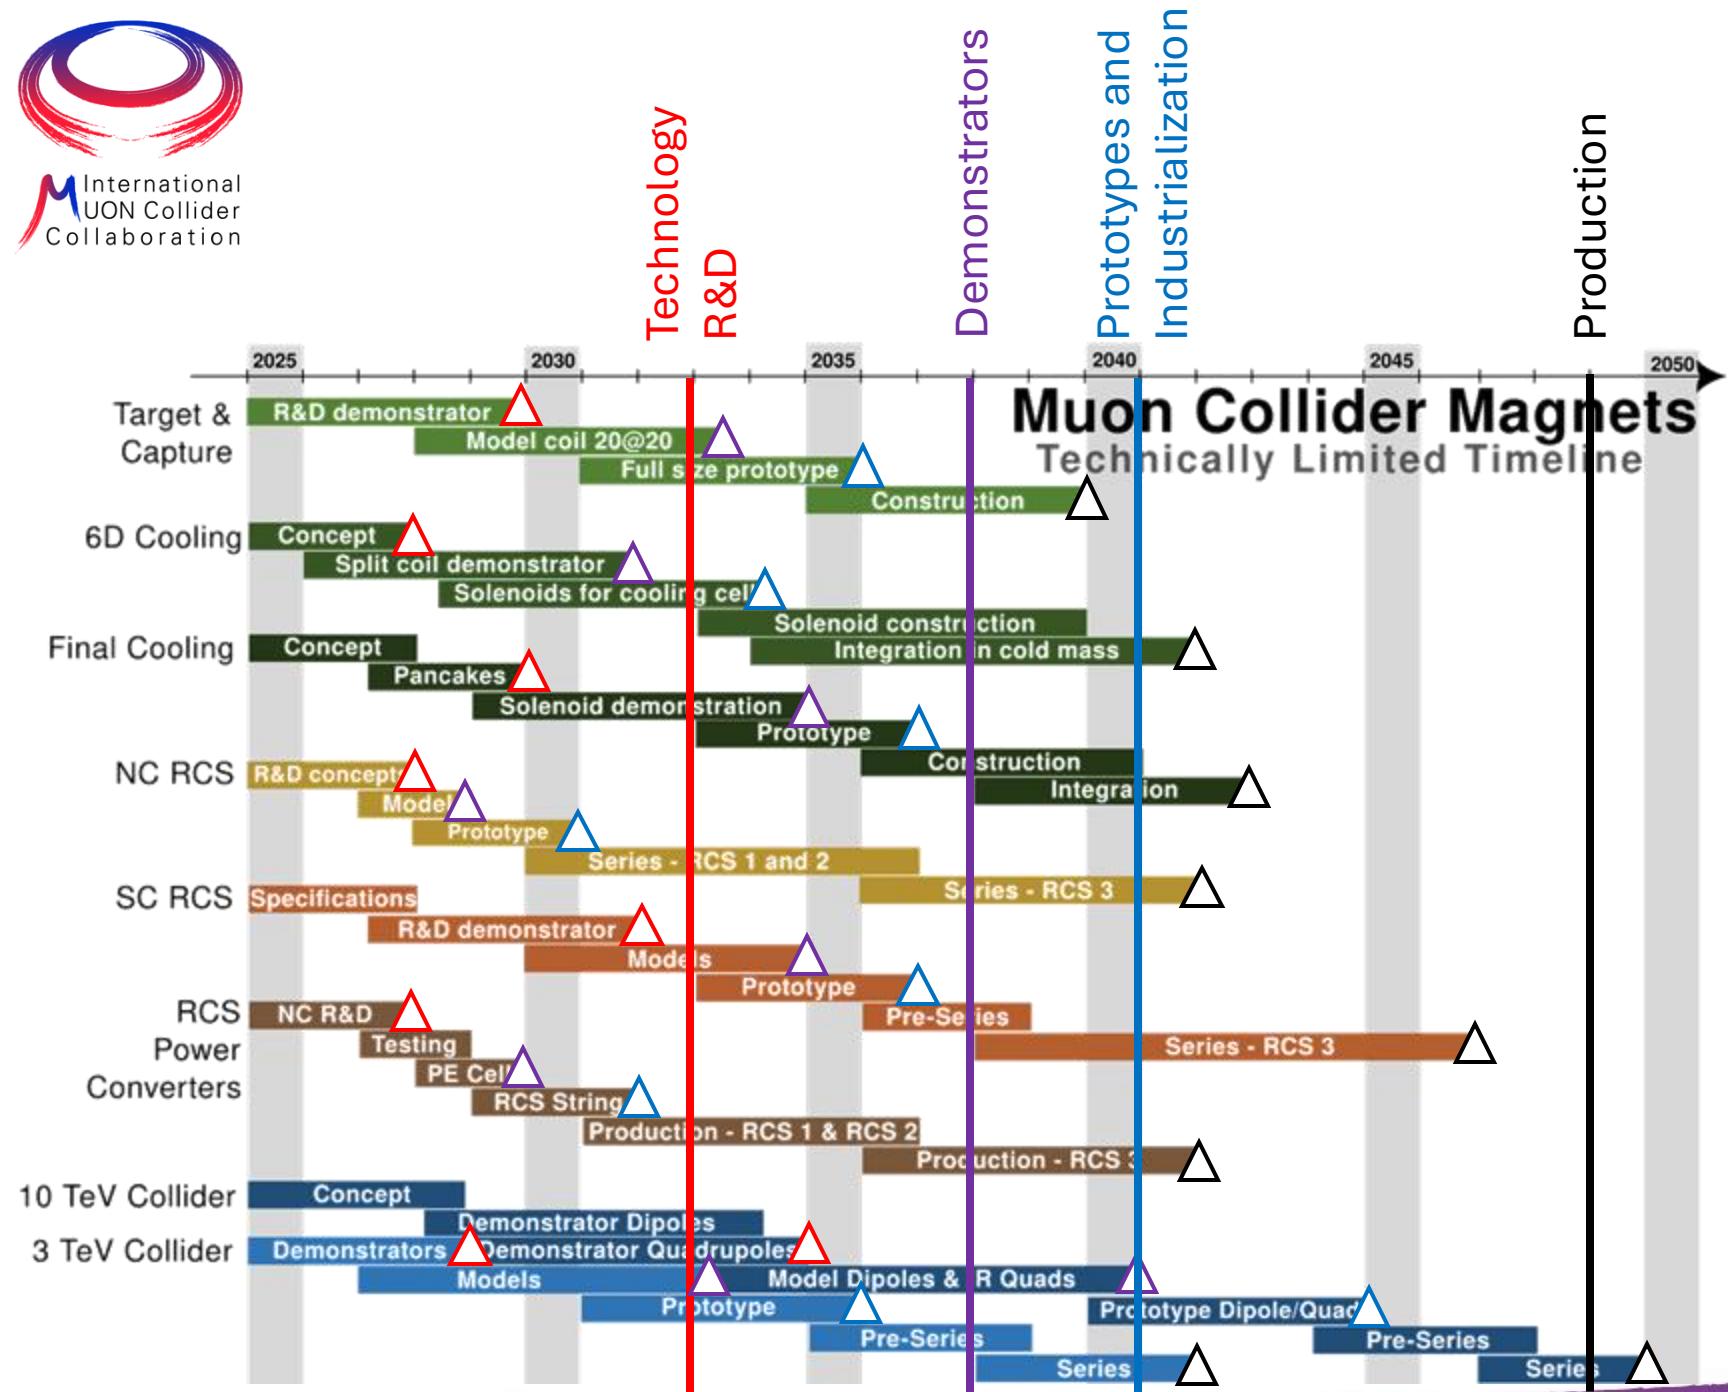



- This is one of the possible plans, prepared as a **technically limited timeline**
- Most magnet milestones are well aligned with the overall plan of the project
- A 3TeV option (consisting of HTS solenoids, NC RCS1+RCS2 and Nb-Ti collider) appears to be feasible with contingency by the desired start in 2050
- A 10TeV option (HTS solenoids, NC RCS1+RCS2, HTS HCS3 and HTS collider) misses the desired milestones by 2...3 years, with no contingency

OUTLINE

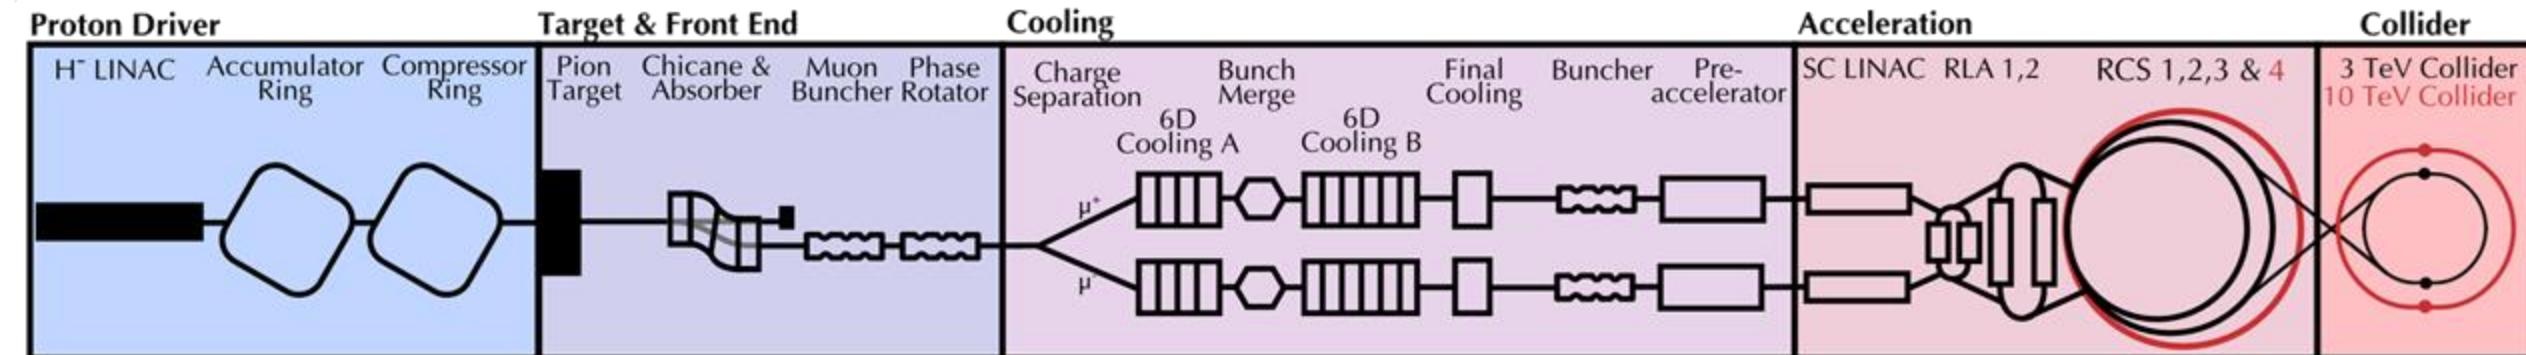

- References
- Magnet timeline
- **R&D plan**
- Cost evaluation
- Summary and discussion points

TRL DRIVES THE R&D

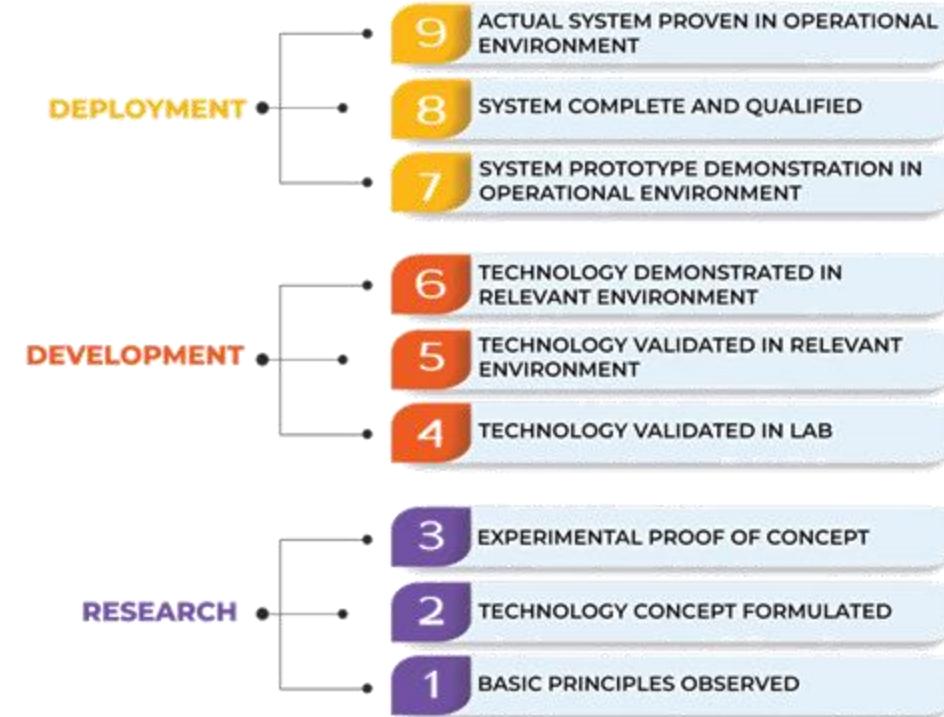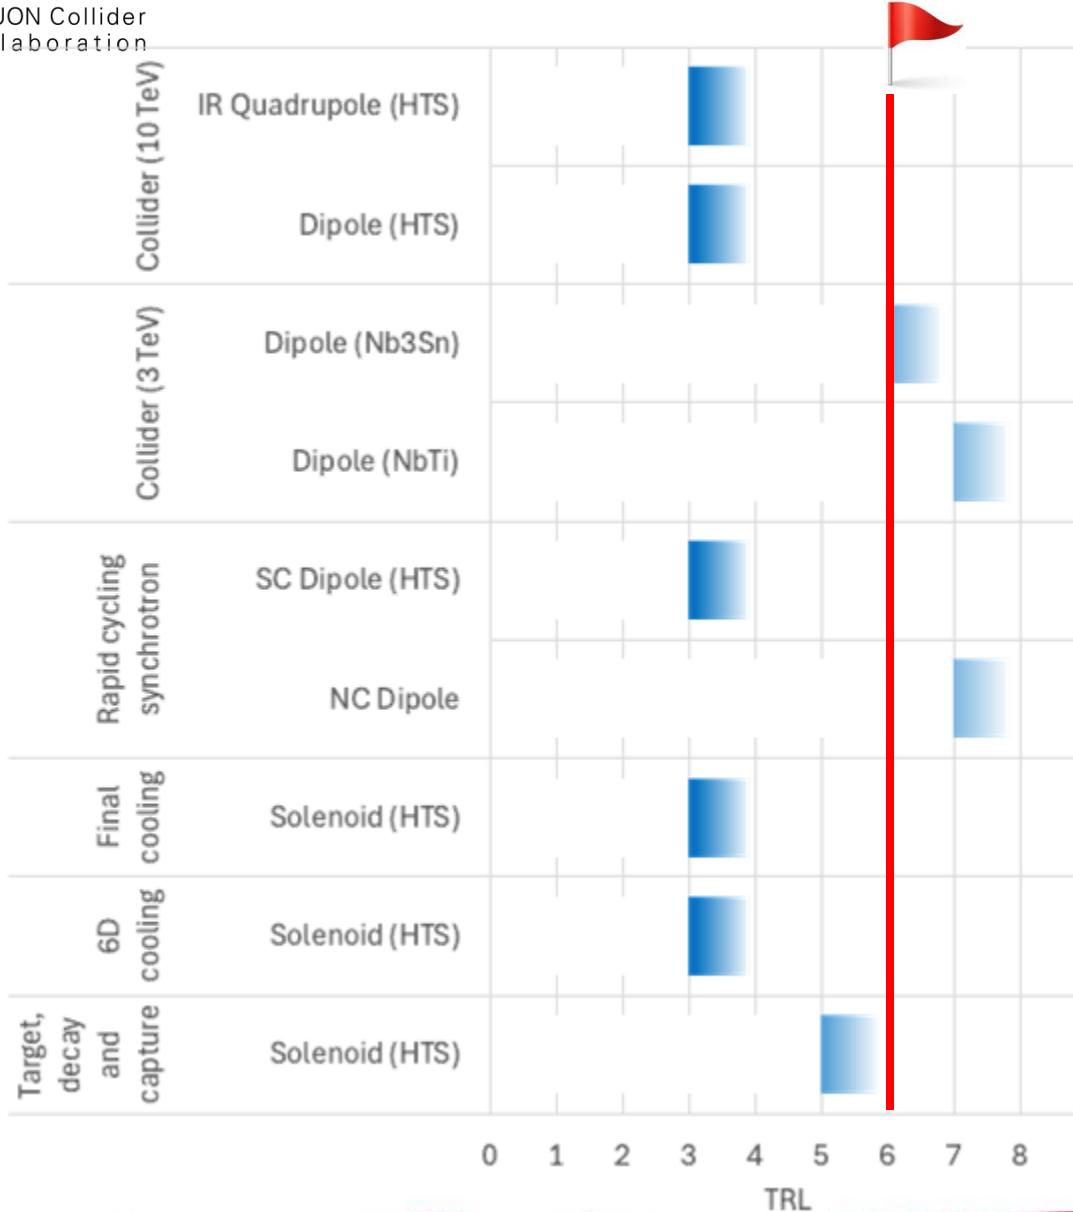


We wish to reach a TRL 6 for the decision of construction, the level of readiness appropriate to enter the industrialization

R&D TECHNOLOGY MILESTONES

| Technology | Technology Milestone Demonstrator | Objectives and Deliverables | Key Parameters and Targets | Time | Resources |
|--|---|---|--|------|----------------------------------|
| Solenoid for target, decay and capture channel | Target solenoid model coil (20@20) | Develop conductor, winding and magnet technology suitable for a target solenoid, generating a bore field of 20 T, and operating at a temperature of 20 K. | Model coil, 1m ID /2.3 m OD, 1.4 m lenght. Bore field of 20 T at 20 K operating temperature. | 2033 | 30 MCHF 37 FTEy |
| Solenoids for cooling | Split Solenoid integration demonstrator for 6D cooling cell (SOLID) | Demonstrator of HTS split solenoid performance, including integration in its support structure submitted to mechanical and thermal loads representative of a 6D cooling cell. | Target field 7 T, bore 510 mm, gap 200 mm, operating at 20 K | 2032 | 7.1 MCHF 42 FTEy |
| | Final cooling UHF solenoid demonstrator (UHF-Demo) | Build and test a demonstrator HTS final cooling solenoid, producing 40 T in a 50 mm bore, and total length of 150 mm | 40T in a 50 mm bore, and total length of 150 mm, operated in the vicinity of liquid helium conditions, 4.5 K | 2034 | 5.6 MCHF 52 FTEy |
| RCS fast pulsed field system | RCS fast pulsed magnet string and power system (RCS-String) | Build and test a string of resistive pulsed dipoles, including powering system and capacitor-based energy storage. | Resistive dipole magnet string, +/-1.8 T field swing in a 30x100 mm aperture. Maximum ramp-rate of 3.3 kT/s, and energy recovery efficiency better than 99 % | 2032 | 6 MCHF 20 FTEy |
| LTS accelerator magnets | Wide-aperture, steady state Nb3Sn dipole for the collider (MBHY) | Demonstrate LTS dipole performance for collider arc | Prototype LTS dipole, field target of 11 T, large bore target of 160 mm, 5 m long, operating with forced-flow of helium at 4.5 K | 2036 | 11.1 MCHF 71 FTEy |
| HTS accelerator magnets | Rectangular aperture HTS dipole (MBHTS) | Demonstrate performance of rectangular aperture HTS dipole for the accelerator | Demonstrator HTS dipole, field target of 10 T, aperture of 30x100 mm, 1 m long, operating at 20 K | 2035 | 8.25 MCHF 60 FTEy |
| | Wide aperture HTS dipole (MBHTSY) | Demonstrate wide aperture HTS dipole for the collider arc | Demonstrator HTS dipole, field target of 14 T, large bore target of 140 mm, 1 m long, operating at 20 K | 2045 | 7.9 (15.8) MCHF 75 (126) FTEy |
| | Wide aperture HTS IR quadrupole (MQHTSY) | Demonstrate wide aperture HTS quadrupole for the collider IR | Demonstrator HTS quadrupole, gradient target of 300 T/m, large bore target of 140 mm, 1 m long, operating at 4.5 K | 2045 | 3.5 (8.8) MCHF 27 (60) FTEy |


R&D RESOURCES - PERSONNEL

| Year | I | II | III | IV | V | VI | VII | VIII | IX | X |
|---|------|------|------|------|------|------|------|------|------|------|
| Target solenoid demonstrator (20@20) | | | | | | | | | | |
| Staff | 0.6 | 0.9 | 0.9 | 1.5 | 3 | 4 | 3.5 | 2.1 | | |
| Post doc | 0.8 | 1.2 | 1.2 | 2 | 1.8 | 2.4 | 2.1 | 0.6 | | |
| Student | 0.6 | 0.9 | 0.9 | 1.5 | 1.2 | 1.6 | 1.4 | 0.3 | | |
| Material (kCHF) | 1000 | 2000 | 5000 | 4000 | 5000 | 7000 | 5000 | 1000 | | |
| Solenoid Integration Demonstrator for 6D cooling cell | | | | | | | | | | |
| Staff | 0.9 | 2.1 | 2.4 | 2.4 | 2.1 | 2.5 | 2 | | | |
| Post doc | 1.2 | 2.8 | 3.2 | 3.2 | 2.8 | 1.5 | 1.2 | | | |
| Student | 0.9 | 2.1 | 2.4 | 2.4 | 2.1 | 1 | 0.8 | | | |
| Material (kCHF) | 400 | 900 | 1400 | 1700 | 1200 | 1000 | 500 | | | |
| Final cooling UHF solenoid demonstrator (UHF-Demo) | | | | | | | | | | |
| Staff | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.1 | 2.1 | 3.5 | 2.5 | |
| Post doc | 1.6 | 1.6 | 2.4 | 2.4 | 2.4 | 2.8 | 2.8 | 2.1 | 1.5 | |
| Student | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.1 | 2.1 | 1.4 | 1 | |
| Material (kCHF) | 300 | 300 | 500 | 500 | 500 | 750 | 750 | 1000 | 1000 | |
| RCS magnet string and power systems (RCS-String) | | | | | | | | | | |
| Staff | 1.4 | 1.4 | 2.8 | 3.6 | 3.6 | 3 | 1 | | | |
| Post doc | 0.4 | 0.4 | 0.8 | 0.4 | 0.4 | 0 | 0 | | | |
| Student | 0.2 | 0.2 | 0.4 | 0 | 0 | 0 | 0 | | | |
| Material (kCHF) | 250 | 300 | 950 | 1500 | 1500 | 1000 | 500 | | | |
| Wide-aperture, steady state Nb3Sn dipole (MBHY) | | | | | | | | | | |
| Staff | 2 | 2 | 3 | 3.5 | 3.5 | 3.5 | 6.3 | 6.3 | 6.3 | 6.3 |
| Post doc | 1.2 | 1.2 | 1.8 | 2.1 | 2.1 | 2.1 | 1.8 | 1.8 | 1.8 | 1.8 |
| Student | 0.8 | 0.8 | 1.2 | 1.4 | 1.4 | 1.4 | 0.9 | 0.9 | 0.9 | 0.9 |
| Material (kCHF) | 300 | 500 | 750 | 845 | 750 | 750 | 1750 | 2000 | 2000 | 1500 |
| Rectangular aperture HTS dipole (MBHTS) | | | | | | | | | | |
| Staff | 1.6 | 1.6 | 2.4 | 2.4 | 2.4 | 3.2 | 4 | 3.5 | 4.9 | 2.8 |
| Post doc | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.4 | 2.4 | 2.1 | 1.4 | 0.8 |
| Student | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.4 | 1.6 | 1.4 | 0.7 | 0.4 |
| Material (kCHF) | 200 | 200 | 500 | 500 | 850 | 1500 | 1500 | 1250 | 1250 | 500 |
| Wide aperture HTS dipole (MBHTSY) | | | | | | | | | | |
| Staff | 2 | 2.4 | 2.4 | 3.2 | 4 | 4 | 4 | 4 | 4.5 | 6.3 |
| Post doc | 1.5 | 1.8 | 1.8 | 2.4 | 2.4 | 2.4 | 2.4 | 2.4 | 2.7 | 1.8 |
| Student | 1.5 | 1.8 | 1.8 | 2.4 | 1.6 | 1.6 | 1.6 | 1.6 | 1.8 | 0.9 |
| Material (kCHF) | 300 | 500 | 750 | 800 | 800 | 800 | 800 | 800 | 1100 | 1250 |
| Wide aperture HTS IR quadrupole (MQHTSY) | | | | | | | | | | |
| Staff | 0 | 0 | 0 | 0 | 1.5 | 2 | 2 | 2 | 3 | 4.2 |
| Post doc | 0 | 0 | 0 | 0 | 0.9 | 1.2 | 1.2 | 1.2 | 1.8 | 1.2 |
| Student | 0 | 0 | 0 | 0 | 0.6 | 0.8 | 0.8 | 0.8 | 1.2 | 0.6 |
| Material (kCHF) | 0 | 0 | 0 | 0 | 200 | 200 | 500 | 750 | 850 | 1000 |
| Muon Collider Magnets - Materials and methods R&D in support of magnet demonstrators | | | | | | | | | | |
| Staff | 1.2 | 1.2 | 1.2 | 1.2 | 1.2 | 1.2 | 2.1 | 2.1 | 2.1 | 2.1 |
| Post doc | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.6 | 0.6 | 0.6 | 0.6 |
| Student | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.3 | 0.3 | 0.3 | 0.3 |
| Material (kCHF) | 200 | 200 | 200 | 200 | 200 | 400 | 400 | 400 | 400 | 400 |
| TOTALS | | | | | | | | | | |
| Material (MCHF) | 3.0 | 4.9 | 10.1 | 10.0 | 11.0 | 13.4 | 11.7 | 7.2 | 6.6 | 4.7 |
| FTE | 23.3 | 28.4 | 36.4 | 40.9 | 44.3 | 47.1 | 46.2 | 37.7 | 36.1 | 29.4 |

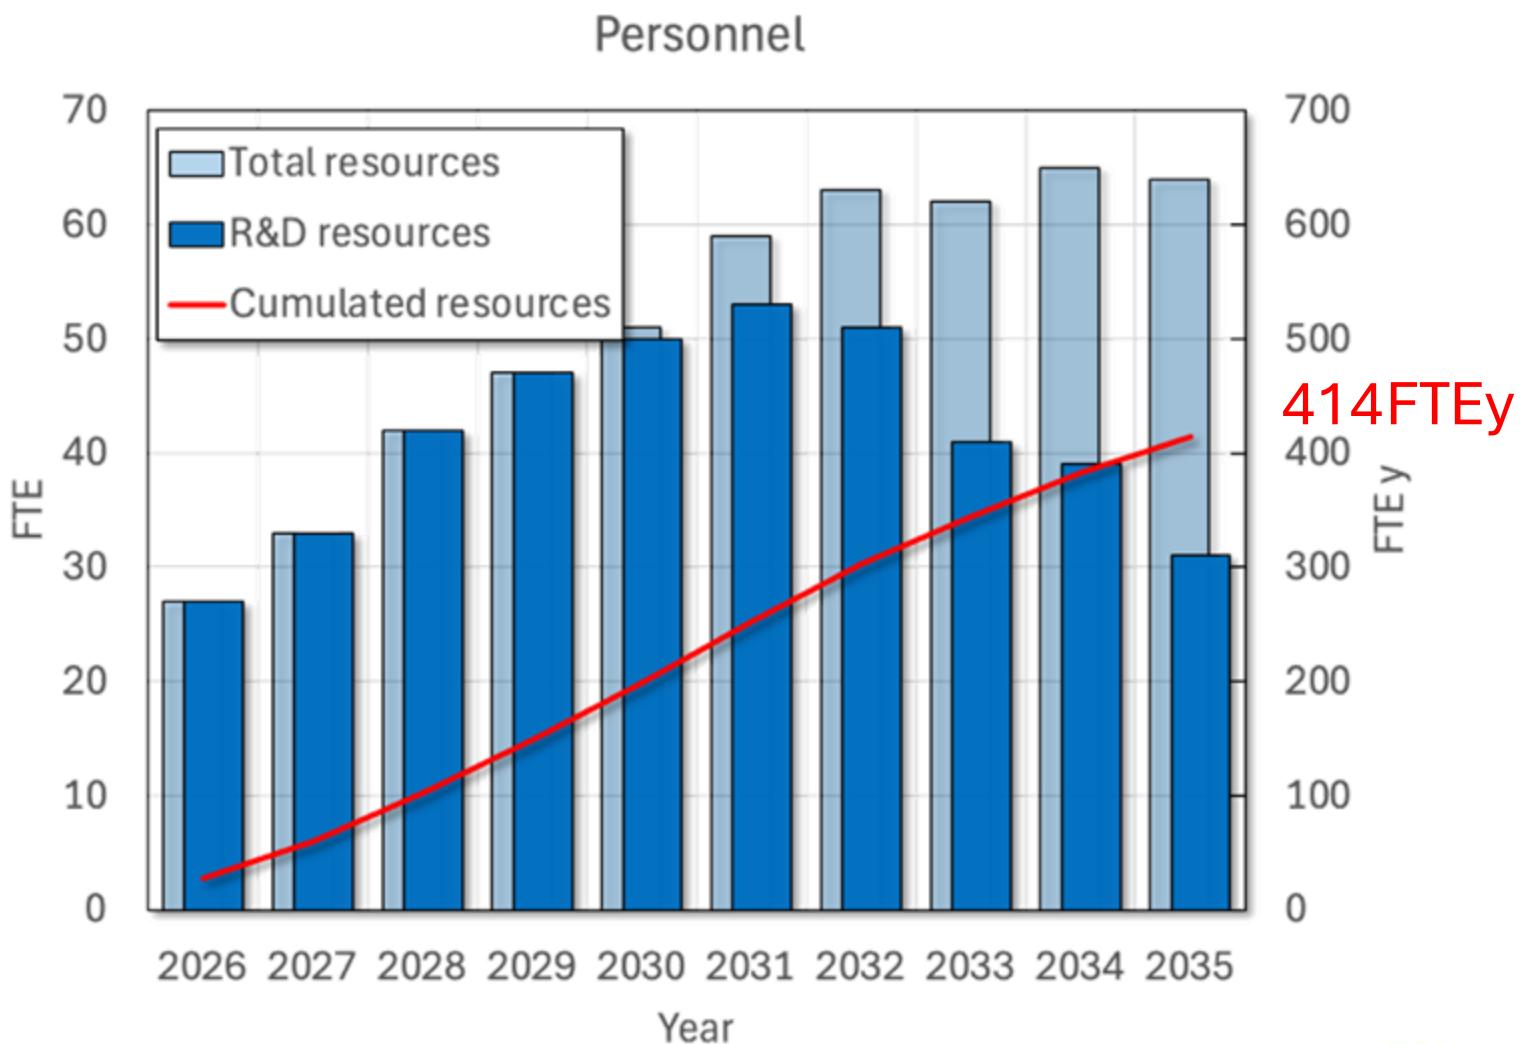


R&D RESOURCES - MATERIAL

| Year | I | II | III | IV | V | VI | VII | VIII | IX | X |
|---|------|------|------|------|------|------|------|------|------|------|
| Target solenoid demonstrator (20@20) | | | | | | | | | | |
| Staff | 0.6 | 0.9 | 0.9 | 1.5 | 3 | 4 | 3.5 | 2.1 | | |
| Post doc | 0.8 | 1.2 | 1.2 | 2 | 1.8 | 2.4 | 2.1 | 0.6 | | |
| Student | 0.6 | 0.9 | 0.9 | 1.5 | 1.2 | 1.6 | 1.4 | 0.3 | | |
| Material (kCHF) | 1000 | 2000 | 5000 | 4000 | 5000 | 7000 | 5000 | 1000 | | |
| Solenoid Integration Demonstrator for 6D cooling cell | | | | | | | | | | |
| Staff | 0.9 | 2.1 | 2.4 | 2.4 | 2.1 | 2.5 | 2 | | | |
| Post doc | 1.2 | 2.8 | 3.2 | 3.2 | 2.8 | 1.5 | 1.2 | | | |
| Student | 0.9 | 2.1 | 2.4 | 2.4 | 2.1 | 1 | 0.8 | | | |
| Material (kCHF) | 400 | 900 | 1400 | 1700 | 1200 | 1000 | 500 | | | |
| Final cooling UHF solenoid demonstrator (UHF-Demo) | | | | | | | | | | |
| Staff | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.1 | 2.1 | 3.5 | 2.5 | |
| Post doc | 1.6 | 1.6 | 2.4 | 2.4 | 2.4 | 2.8 | 2.8 | 2.1 | 1.5 | |
| Student | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.1 | 2.1 | 1.4 | 1 | |
| Material (kCHF) | 300 | 300 | 500 | 500 | 500 | 750 | 750 | 1000 | 1000 | |
| RCS magnet string and power systems (RCS-String) | | | | | | | | | | |
| Staff | 1.4 | 1.4 | 2.8 | 3.6 | 3.6 | 3 | 1 | | | |
| Post doc | 0.4 | 0.4 | 0.8 | 0.4 | 0.4 | 0 | 0 | | | |
| Student | 0.2 | 0.2 | 0.4 | 0 | 0 | 0 | 0 | | | |
| Material (kCHF) | 250 | 300 | 950 | 1500 | 1500 | 1000 | 500 | | | |
| Wide-aperture, steady state Nb3Sn dipole (MBHY) | | | | | | | | | | |
| Staff | 2 | 2 | 3 | 3.5 | 3.5 | 3.5 | 6.3 | 6.3 | 6.3 | 6.3 |
| Post doc | 1.2 | 1.2 | 1.8 | 2.1 | 2.1 | 2.1 | 1.8 | 1.8 | 1.8 | 1.8 |
| Student | 0.8 | 0.8 | 1.2 | 1.4 | 1.4 | 1.4 | 0.9 | 0.9 | 0.9 | 0.9 |
| Material (kCHF) | 300 | 500 | 750 | 845 | 750 | 750 | 1750 | 2000 | 2000 | 1500 |
| Rectangular aperture HTS dipole (MBHTS) | | | | | | | | | | |
| Staff | 1.6 | 1.6 | 2.4 | 2.4 | 2.4 | 3.2 | 4 | 3.5 | 4.9 | 2.8 |
| Post doc | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.4 | 2.4 | 2.1 | 1.4 | 0.8 |
| Student | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.4 | 1.6 | 1.4 | 0.7 | 0.4 |
| Material (kCHF) | 200 | 200 | 500 | 500 | 850 | 1500 | 1500 | 1250 | 1250 | 500 |
| Wide aperture HTS dipole (MBHTSY) | | | | | | | | | | |
| Staff | 2 | 2.4 | 2.4 | 3.2 | 4 | 4 | 4 | 4 | 4.5 | 6.3 |
| Post doc | 1.5 | 1.8 | 1.8 | 2.4 | 2.4 | 2.4 | 2.4 | 2.4 | 2.7 | 1.8 |
| Student | 1.5 | 1.8 | 1.8 | 2.4 | 1.6 | 1.6 | 1.6 | 1.6 | 1.8 | 0.9 |
| Material (kCHF) | 300 | 500 | 750 | 800 | 800 | 800 | 800 | 800 | 1100 | 1250 |
| Wide aperture HTS IR quadrupole (MQHTSY) | | | | | | | | | | |
| Staff | 0 | 0 | 0 | 0 | 1.5 | 2 | 2 | 2 | 3 | 4.2 |
| Post doc | 0 | 0 | 0 | 0 | 0.9 | 1.2 | 1.2 | 1.2 | 1.8 | 1.2 |
| Student | 0 | 0 | 0 | 0 | 0.6 | 0.8 | 0.8 | 0.8 | 1.2 | 0.6 |
| Material (kCHF) | 0 | 0 | 0 | 0 | 200 | 200 | 500 | 750 | 850 | 1000 |
| Muon Collider Magnets - Materials and methods R&D in support of magnet demonstrators | | | | | | | | | | |
| Staff | 1.2 | 1.2 | 1.2 | 1.2 | 1.2 | 1.2 | 2.1 | 2.1 | 2.1 | 2.1 |
| Post doc | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.6 | 0.6 | 0.6 | 0.6 |
| Student | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.3 | 0.3 | 0.3 | 0.3 |
| Material (kCHF) | 200 | 200 | 200 | 200 | 200 | 400 | 400 | 400 | 400 | 400 |
| TOTALS | | | | | | | | | | |
| Material (MCHF) | 3.0 | 4.9 | 10.1 | 10.0 | 11.0 | 13.4 | 11.7 | 7.2 | 6.6 | 4.7 |
| FTE | 23.3 | 28.4 | 36.4 | 40.9 | 44.3 | 47.1 | 46.2 | 37.7 | 36.1 | 29.4 |

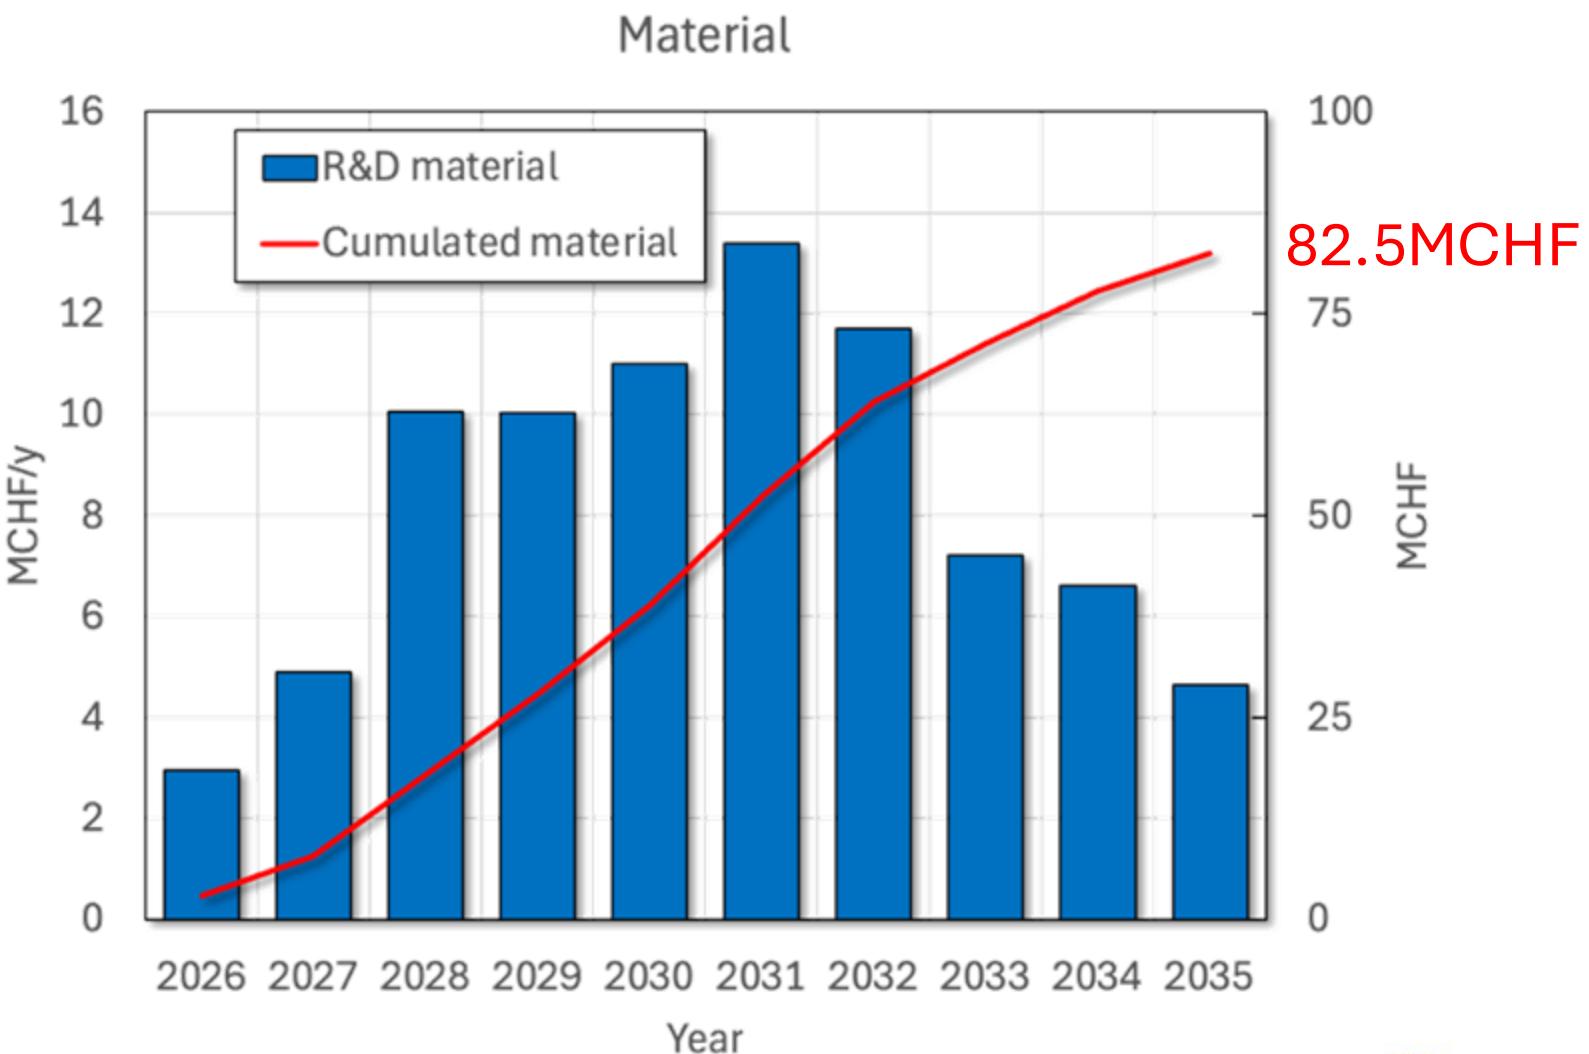

R&D IMPACT

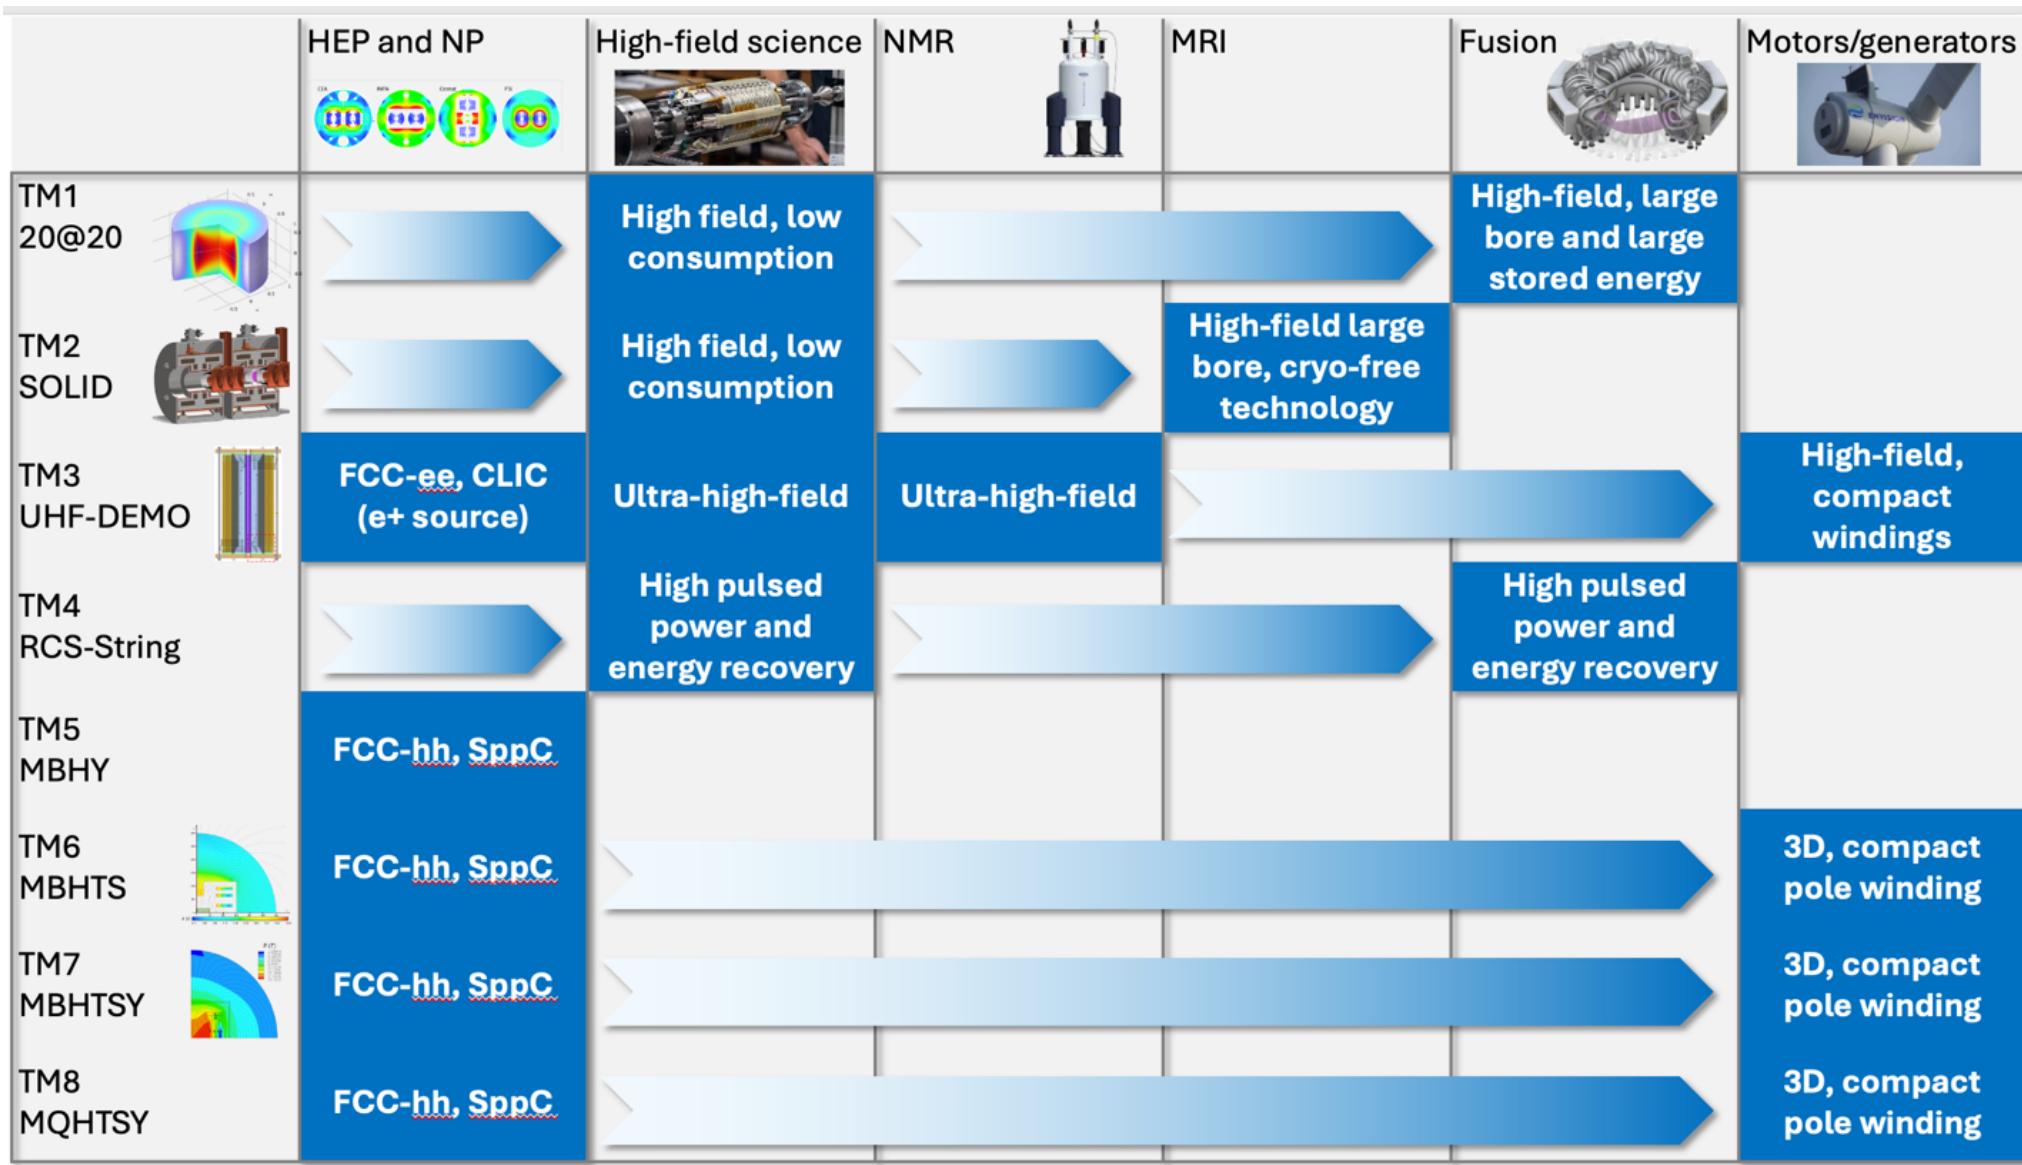

PRACTICAL IMPACT EXAMPLES

- **Fusion for Energy (ITER EU Domestic Agency)**
 - Framework agreement and first addendum in final negotiation
 - Contribution to the design of the HTS target solenoid, relevant to the central solenoid of DTT
- **EUROFusion (next step European fusion reactor)**
 - Framework agreement signed in 2023, first addendum signed in 2024
 - Contribution to the design of the HTS target solenoid, relevant to the magnets of a Volumetric Neutron Source proposed as next step in the European fusion strategy
- **Gauss Fusion (one of the leading EU fusion start-ups)**
 - Consultancy agreement signed in 2023
 - CERN contribution to the design of the LTS/HTS GIGA stellarator magnets, based on advances in the HTS target solenoid
- **ENI (oil and gas energy giant)**
 - Framework agreement and first addendum signed in 2024
 - Collaboration on the conceptual design and project proposal for the CERN construction of a large bore HTS solenoid (20@20 model coil) relevant to the muon collider and fusion
- IFAST-2 proposal to **INFRA-2025-TECH-01-02** (CERN, INFINEON, PSI)
 - Proposal of fast pulsed power cell + magnet system sent to IFAST-2 coordination for ranking at TIARA
 - Industrial interest in rapidly pulsed and large energy/power supplies






International
MUON Collider
Collaboration



OUTLINE

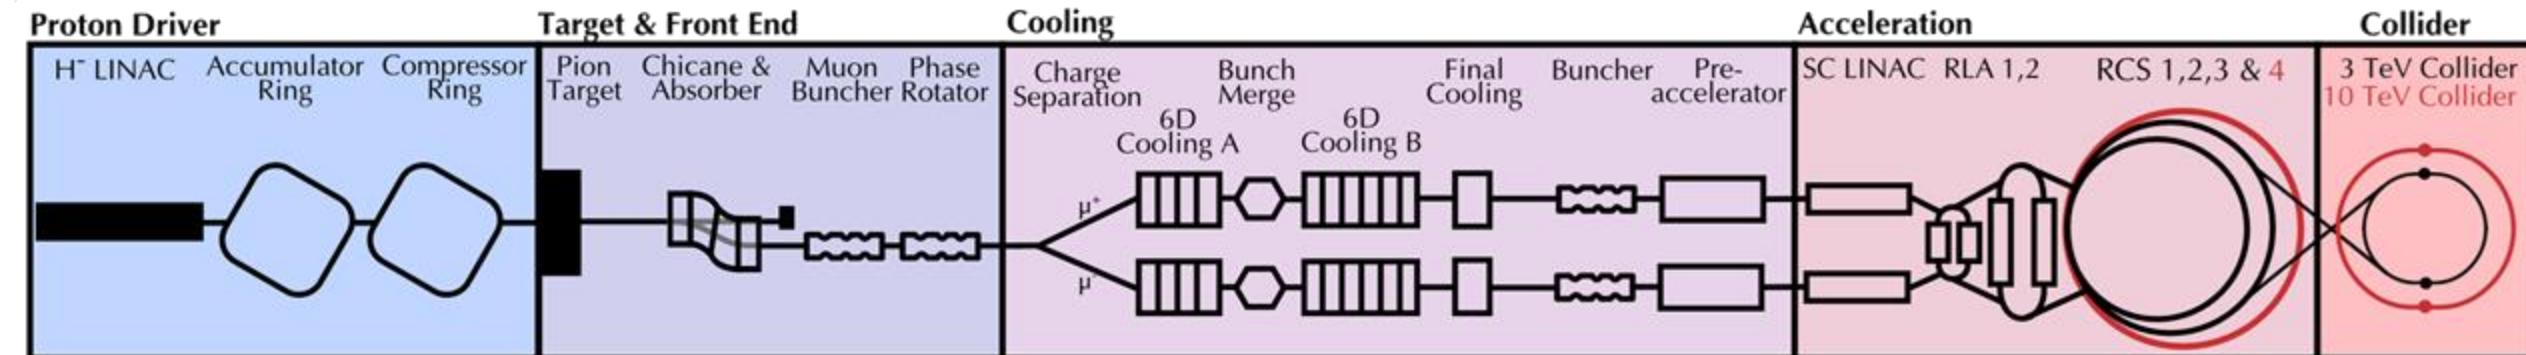

- References
- Magnet timeline
- R&D plan
- **Cost evaluation**
- Summary and discussion points

PROPOSAL

COST MODEL

$$C = (C_{\text{Coils}} + C_{\text{ColdMass}} + C_{\text{CryoMagnet}}) L_{\text{Magnet}}$$

$$C_{\text{Coils}} = C_{\text{SC}} + C_{\text{Cable}} + C_{\text{CoilManufacturing}}$$

$$C_{\text{SC}} = M_{\text{Strand}} C_{\text{Strand}}$$

$$M_{\text{Strand}} = d_{\text{Strand}} A_{\text{Strand}} / \cos(\theta)$$

$$C_{\text{Cable}} = f_{\text{Cable}} C_{\text{SC}}$$



$$C_{\text{ColdMass}} = C_{\text{ColdMassMaterials}} + C_{\text{ColdMassManufacturing}}$$

$$C_{\text{ColdMassMaterials}} = B/B^{\text{Ref}} C_{\text{ColdMassMaterials}}^{\text{Ref}}$$

COST MODEL

| | | Nb-Ti | Nb ₃ Sn (present) | Nb ₃ Sn (aspirational) | REBCO (present) | REBCO (aspirational) | BSCCO (present) | BSCCO (aspirational) |
|---|----------------------|-------|---------------------------------|--------------------------------------|--------------------|-------------------------|--------------------|-------------------------|
| c_{Strand} | (EUR/kg) | 159 | 2274 | 758 | 8013 | 2671 | 17700 | 5900 |
| d_{Strand} | (kg/m ³) | 8000 | 8000 | 8000 | 7800 | 7800 | 9000 | 9000 |
| f_{Cable} | (-) | 0.1 | 0.1 | 0.1 | 0 | 0 | 0.1 | 0.1 |
| $C_{\text{CoilManufacturing}}$ | (kEUR/m) | 9.9 | 11.9 | 11.9 | 9.9 | 9.9 | 15 | 15 |
| $C_{\text{ColdMassMaterials}}^{\text{Ref}}$ | (kEUR/m) | | | | 26.4 | | | |
| B^{Ref} | (T) | | | | 8.33 | | | |
| $C_{\text{ColdMassManufacturing}}$ | (kEUR/m) | 26.4 | 31.7 | 31.7 | 26.4 | 26.4 | 31.7 | 31.7 |
| $C_{\text{CryoMagnet}}$ | (kEUR/m) | | | | 8.0 | | | |

COST ESTIMATE EXAMPLES

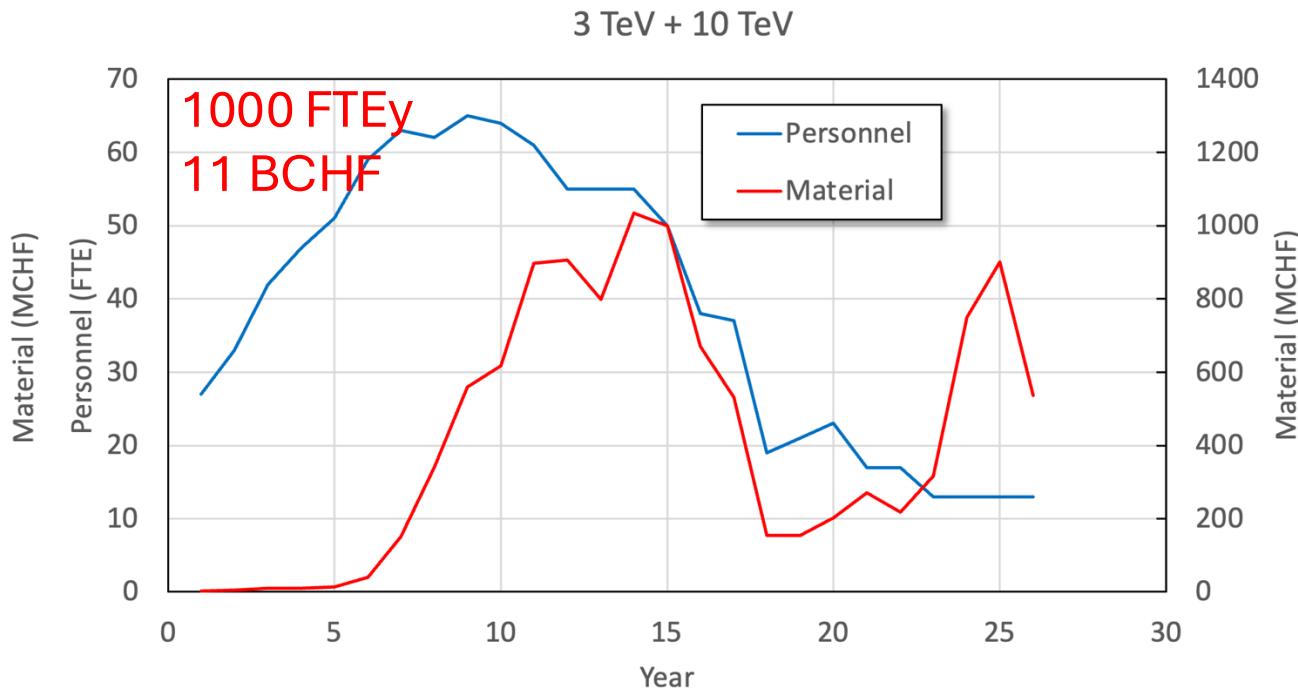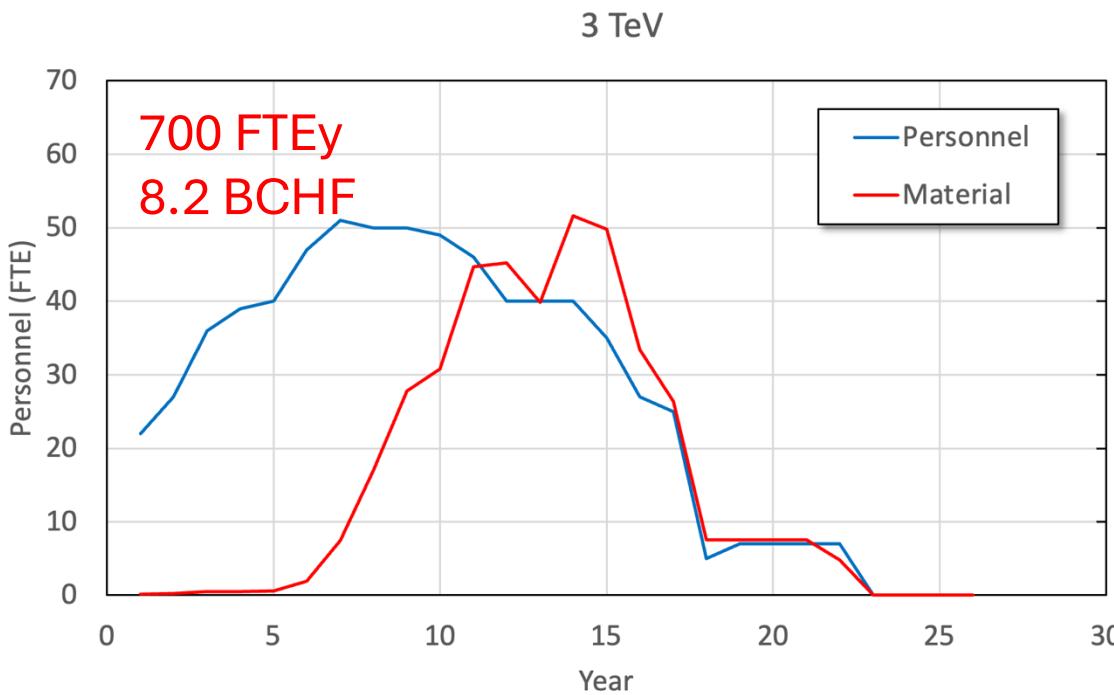

CAVEAT: THIS IS ONLY AN ESTIMATE
WORK IN PROGRESS

COST SCALING EXPECTATION

Sector dipole


$$B = \frac{2\mu_0}{\pi} J w \sin(\varphi)$$

$$A \approx \begin{cases} \frac{B}{J} & \text{for } w \ll R_{in} \\ \frac{B^2}{J^2} & \text{for } w \gg R_{in} \end{cases}$$

Material cost per unit length is proportional to coil cross section

$$C_1 \approx \frac{B^n}{J^n} L$$


$$C'_1 \approx B \sqrt{L}$$

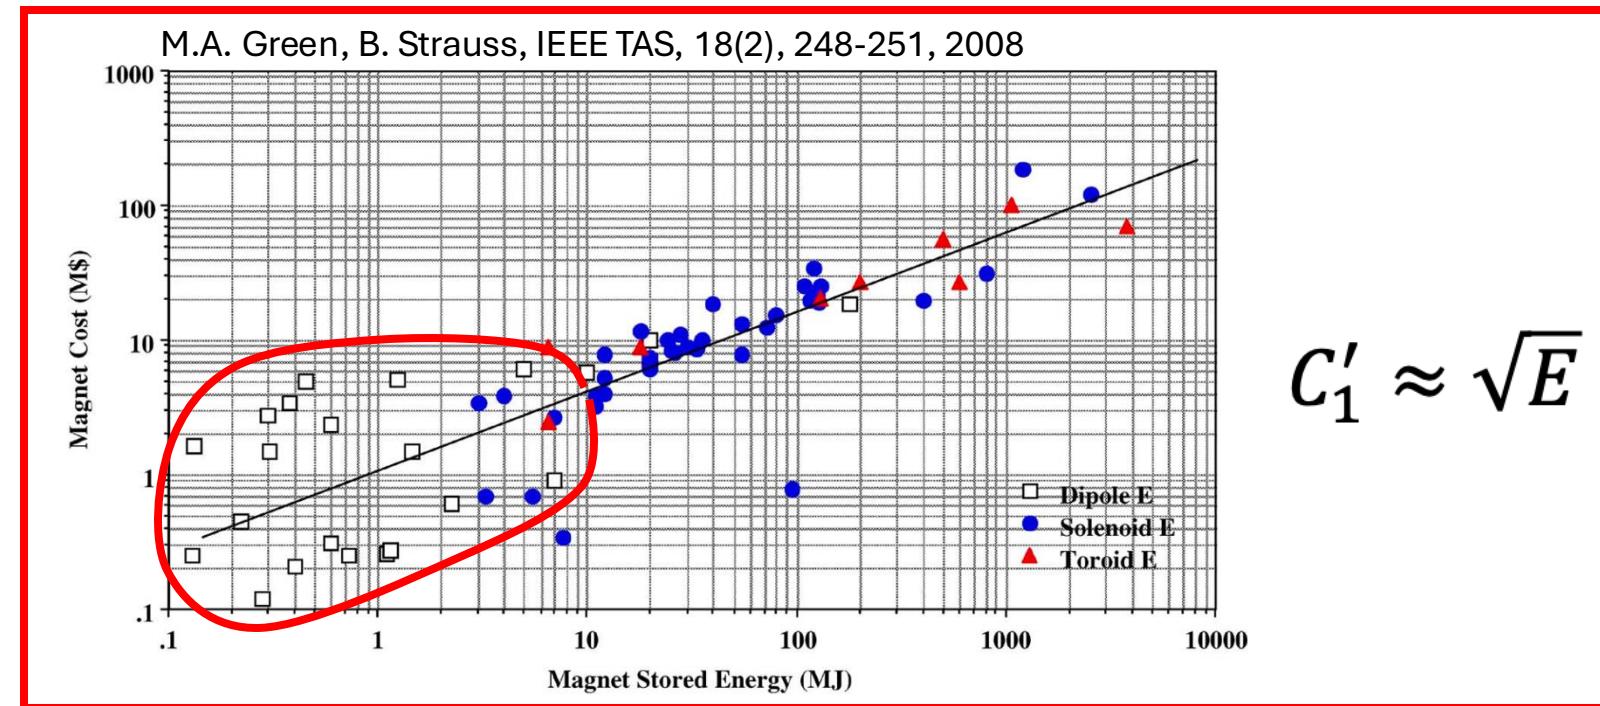


$$C'_1 \approx \sqrt{E}$$

Magnet stored energy is proportional to B^2 and length

Green-Strauss scaling does not apply to accelerator magnets

OUTLINE

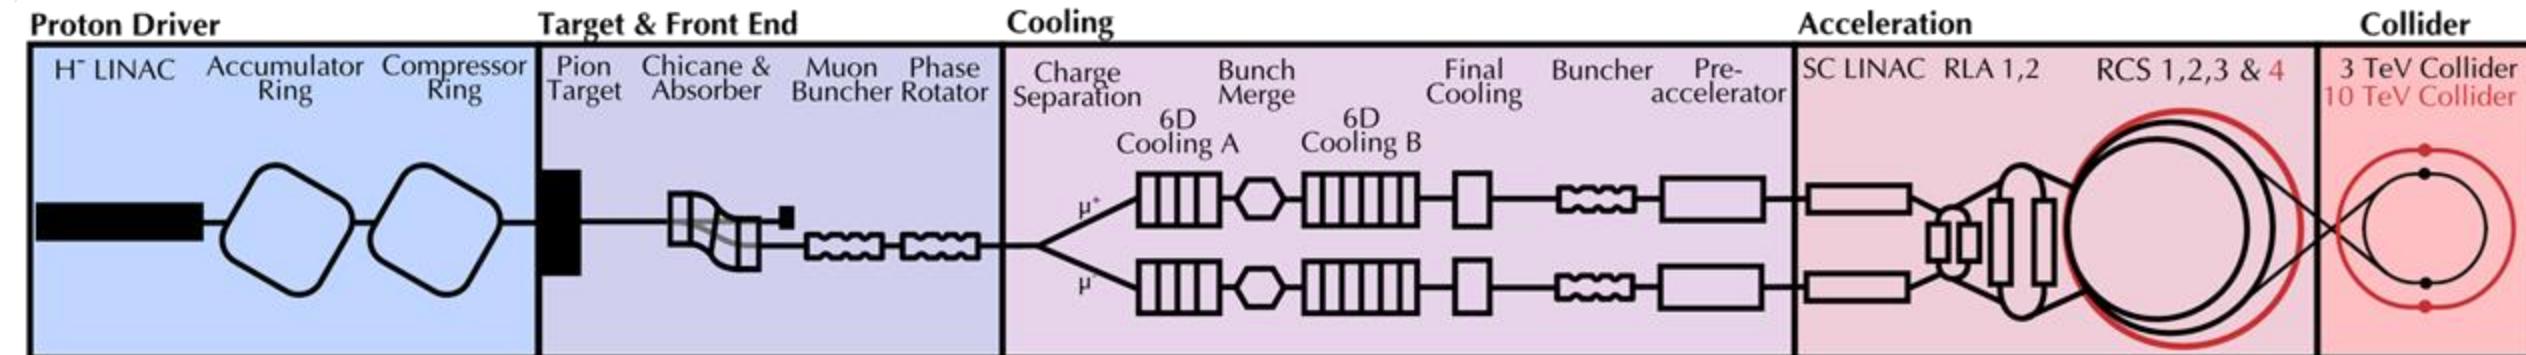

- References
- Magnet timeline
- R&D plan
- Cost evaluation
- **Summary and discussion points**

SUMMARY AND DISCUSSION POINTS

- NOTE: while the R&D plan is rather self-consistent (R&D review), the present plan to completion is a basis for discussion
 - Q1: Is the cost evaluation method shared and agreed ? And, assuming resources available, is the timeline credible and agreed ?
 - Q2: Which scenario should we recommend as a baseline ?
 - Nb₃Sn – is it worth maintaining a line on this R&D ?
 - HFM is working on this technology, but not at the right aperture, nor specification
 - Is there a secured future for this technology ?
 - Nb-Ti – should we propose a demonstrator ?
 - Can be realized with relatively modest effort
 - Could bring a strong image impact
 - HTS for the various parts of the complex
 - Is it credible ? Is it too ambitious ?
 - Q3: Which R&D do we miss ?
 - Combined function magnets
 - Q4: are there means to simplify, standardize, and reduce cost ?

HIC SVNT LEONES



MAGNET R&D TARGETS

| | | Target, decay and capture | 6D cooling | Final cooling | Rapid cycling synchrotron | | Collider ring | | | |
|------------------------------|-----------|---------------------------------|---------------------------|------------------------|------------------------------|---------------------|----------------------|----------------------|----------------------|----------------------|
| Magnet type | (-) | Solenoid | Solenoid | Solenoid | NC Dipole | SC Dipole | Dipole | Dipole | Dipole | Quadrupole |
| SC material options | (-) | HTS | HTS/LTS ⁽²⁾ | HTS | N/A | HTS | Nb-Ti | Nb ₃ Sn | HTS | HTS |
| Aperture | (mm) | 1400 | 60...800 ⁽³⁾ | 50 | 30x100 | 30x100 | 160 | 160 | 140 | 140 |
| Length | (m) | 19 | 0.08...0.3 ⁽³⁾ | 0.5...1 ⁽⁴⁾ | 5 | 2 | 4...6 ⁽⁴⁾ | 4...6 ⁽⁴⁾ | 4...6 ⁽⁴⁾ | 3...9 ⁽⁴⁾ |
| Number of magnets | (-) | 20 | 2 x 3030 | 20 | 7000 ⁽⁶⁾ | 3000 ⁽⁶⁾ | 1250 ⁽⁸⁾ | 1250 ⁽⁸⁾ | 1250 ⁽⁸⁾ | 28 |
| Bore Field/Gradient | (T)/(T/m) | 20 | 2.6...17.9 ⁽³⁾ | > 40 | ± 1.8 ⁽⁵⁾ | 10 | 5 | 11 | 14 | 300 |
| Ramp-rate | (T/s) | SS | SS | SS | 3320...810 ⁽⁷⁾ | SS | SS | SS | SS | SS |
| Stored energy | (MJ) | 1400 | 5...75 | 4 | 0.03 | 3.4 | 5 | 20 | 24 | 60 |
| Heat load | (W/m) | 2 ⁽¹⁾ | TBD | TBD | 1200 | 5 | 5 | 5 | 10 | 10 |
| Radiation dose | (MGy) | 80 | TBD | TBD | TBD | TBD | 30 | 30 | 30 | 30 |
| Operating temperature | (K) | 20 | 20 | 4.5 | 300 | 20 | 4.5 | 4.5 | 20 | 4.5...20 |

NOTES:

(1) Intended as linear heat load along the conductor wound in the solenoid. Total heat load in the target, decay and capture solenoid is approximately 4 kW.

(2) Superconducting material and operating temperature to be selected as a function of the system cost. Present baseline study is oriented towards HTS at 20 K.

(3) The range indicated covers the several solenoid magnet types that are required for the cooling cells. Extreme values typically do not occur at the same time.

(4) Specific optics are being studied, the length range indicated is representative.

(5) Rapid Cycled Synchrotrons require uni-polar swing, from zero to peak field. Hybrid Cycled Synchrotrons require bi-polar swing, from negative to positive peak field

(6) Considering the CERN implementation (SPS+LHC tunnels)

(7) Required ramp-rate decreases from the first to the last synchrotron in the acceleration chain

(8) Considering a collider of the final size (approximately 10 km length)

TM1 – 20@20

Objectives

Develop conductor, winding and magnet technology suitable for a target solenoid, generating a bore field of 20 T, and operating at a temperature of 20 K. The geometry is based on a model coil, a single solenoid coil with reduced bore size and height, scaled to reduce conductor needs and cost

High-level Deliverables


- 1) HTS conductor, designed, manufactured and tested on industrial scale for force flow-cooled large bore high field solenoids (1 km) (3Y)
- 2) Reduced scale windings of final conductor, designed and manufactured with industrial participation, tested in self- and background field (5Y)
- 3) Model coil, designed and manufactured with industrial participation, tested for performance and endurance (8Y)

| Resources | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 |
|--------------|------|------|------|------|------|------|------|------|------|------|
| Staff | 0.6 | 0.9 | 0.9 | 1.5 | 3 | 4 | 3.5 | 2.1 | | |
| Postdoc/GRAD | 0.8 | 1.2 | 1.2 | 2 | 1.8 | 2.4 | 2.1 | 0.6 | | |
| Student | 0.6 | 0.9 | 0.9 | 1.5 | 1.2 | 1.6 | 1.4 | 0.3 | | |
| Material | 1000 | 2000 | 5000 | 4000 | 5000 | 7000 | 5000 | 1000 | | |

Interested partners

Academia: CERN, INFN, University of Bologna, Politecnico of Torino, University of Twente, EPFL/SPC, KEK

Industry: Tape manufacturers, ASG, ICAS

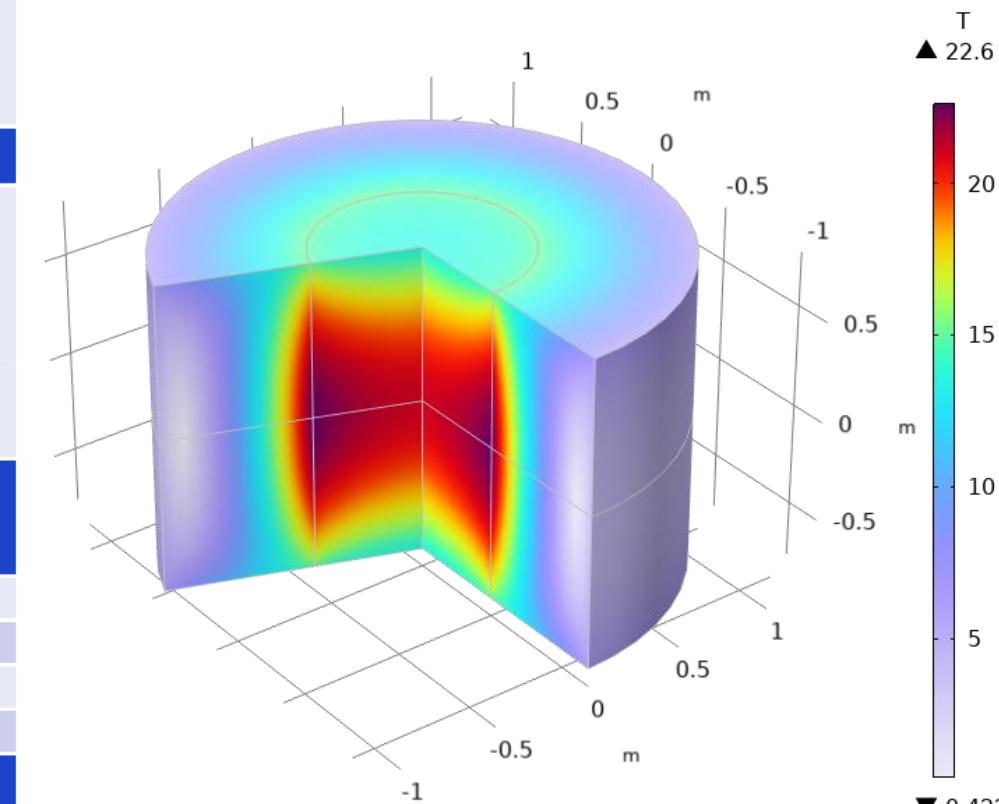

TM2 – SOLID

Objectives

Demonstrator of HTS split solenoid performance, including integration in its support structure submitted to mechanical and thermal loads representative of a 6D cooling cell. Target field 7 T, bore 510 mm, gap 200 mm, operating at 20 K

High-level Deliverables


- 1) Split HTS solenoid design completed (1Y)
- 2) Small scale solenoid demonstration tests, validating technology selections (3Y)
- 3) Split solenoid built and tested (7Y)

| Resources | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 |
|--------------|------|------|------|------|------|------|------|------|------|------|
| Staff | 0.9 | 2.1 | 2.4 | 2.4 | 2.1 | 2.5 | 2 | | | |
| Postdoc/GRAD | 1.2 | 2.8 | 3.2 | 3.2 | 2.8 | 1.5 | 1.2 | | | |
| Student | 0.9 | 2.1 | 2.4 | 2.4 | 2.1 | 1 | 0.8 | | | |
| Material | 400 | 900 | 1400 | 1700 | 1200 | 1000 | 500 | | | |

Interested partners

Academia: INFN, CERN, University of Southampton, Technical University Tampere

Industry: Tape manufacturers

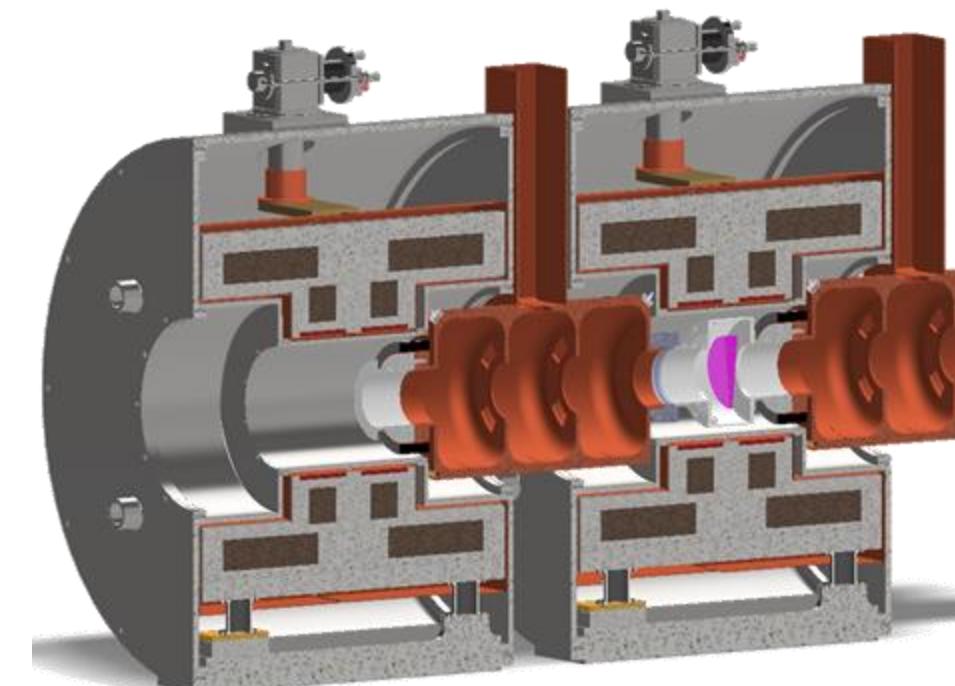

TM3 – UHF-DEMO

Objectives

Build and test a demonstrator HTS final cooling solenoid, producing 40 T in a 50 mm bore, and total length of 150 mm (limit cost)

High-level Deliverables


- 1) Single pancake, final configuration, stand-alone test (2Y)
- 2) Stacked pancake, final configuration, achieve 20 T (5Y)
- 3) Demonstrator construction and test (9Y)

| Resources | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 |
|--------------|------|------|------|------|------|------|------|------|------|------|
| Staff | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.1 | 2.1 | 3.5 | 2.5 | |
| Postdoc/GRAD | 1.6 | 1.6 | 2.4 | 2.4 | 2.4 | 2.8 | 2.8 | 2.1 | 1.5 | |
| Student | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.1 | 2.1 | 1.4 | 1 | |
| Material | 300 | 300 | 500 | 500 | 500 | 750 | 750 | 1000 | 1000 | |

Interested partners

Academia: CERN, INFN, PSI, CEA, University of Twente, University of Southampton, Technical University Tampere

Industry: Tape manufacturers

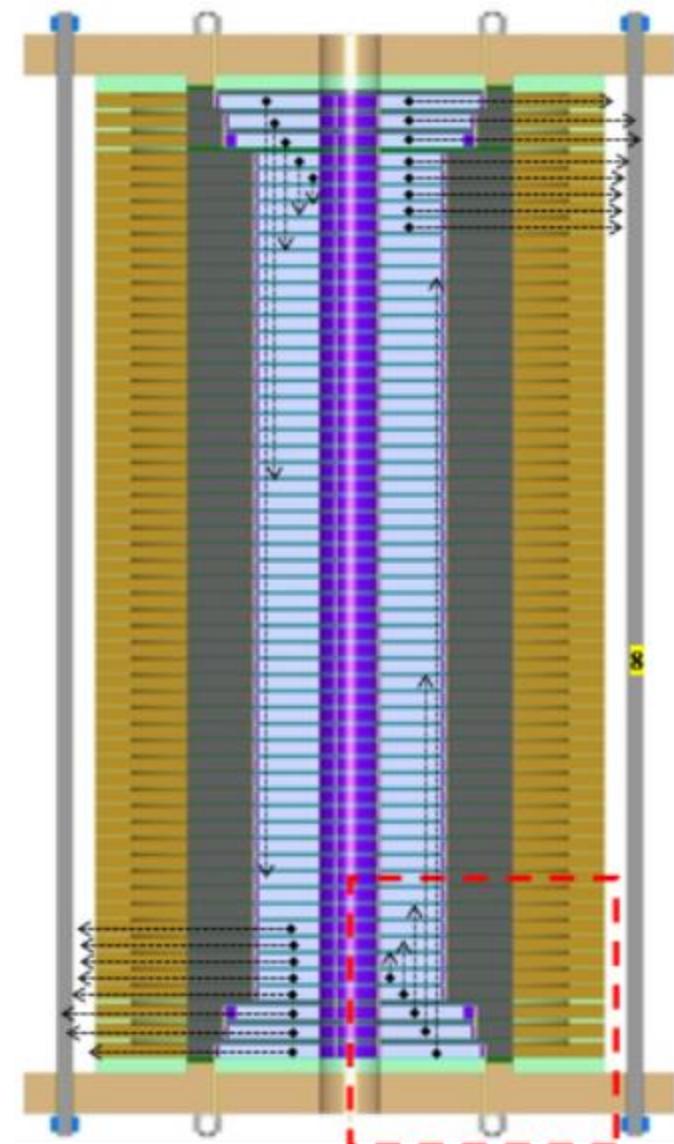

TM4 – RCS-STRING

Objectives

Build and test a string of resistive pulsed dipoles, including powering system and capacitor-based energy storage, aiming at field swing of +/- 1.8 T, maximum ramp-rate of 3.3 kT/s, and energy recovery efficiency better than 99 %

High-level Deliverables


- 1) Dipole magnet stand-alone test (3Y)
- 2) Power converter and energy storage stand-alone test (3Y)
- 3) String construction and test (7Y)

| Resources | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 |
|--------------|------|------|------|------|------|------|------|------|------|------|
| Staff | 1.4 | 1.4 | 2.8 | 3.6 | 3.6 | 3 | 1 | | | |
| Postdoc/GRAD | 0.4 | 0.4 | 0.8 | 0.4 | 0.4 | 0 | 0 | | | |
| Student | 0.2 | 0.2 | 0.4 | 0 | 0 | 0 | 0 | | | |
| Material | 250 | 300 | 950 | 1500 | 1500 | 1000 | 500 | | | |


Interested partners

Academia: CERN, University of Bologna, Technical University of Darmstadt

Industry:

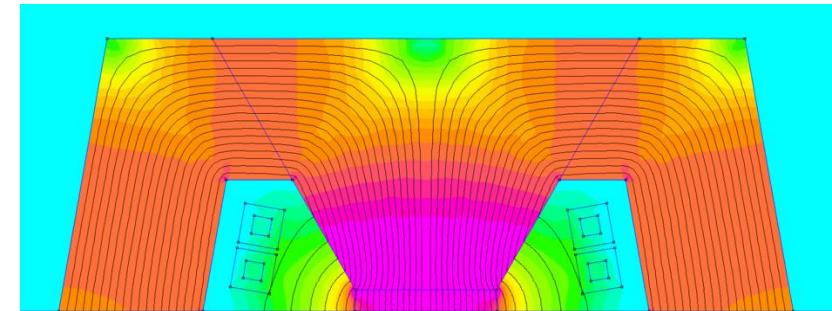

Two dipoles prototypes
Two power cells prototypes

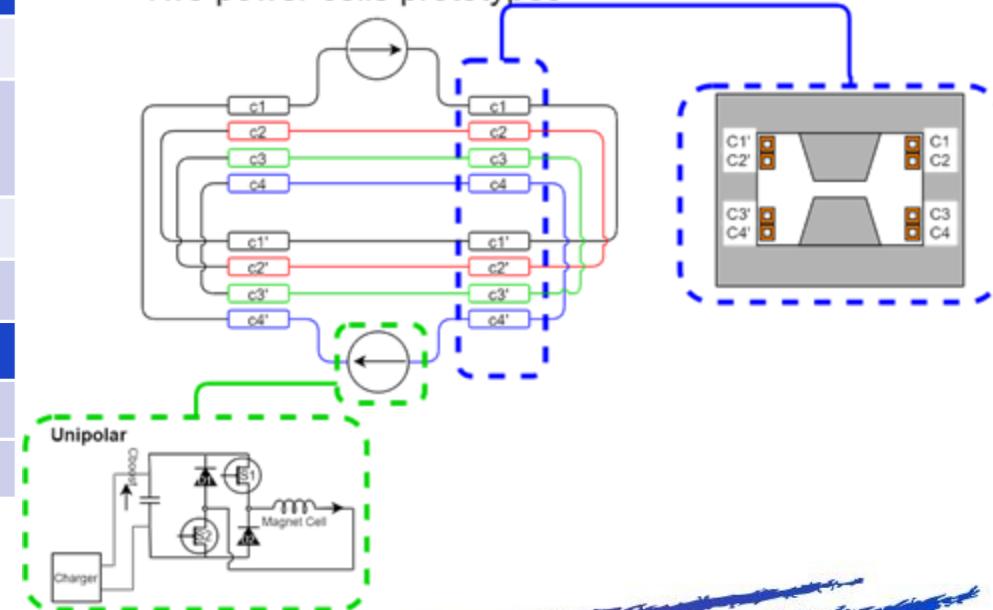

TM5 – MBHY

Objectives

Build and test Nb3Sn demonstrator dipole with field target of 11 T, large bore, target 160 mm, 5 m long, operating with forced-flow of helium at 4.5 K

High-level Deliverables


- 1) Dipole magnet engineering and validation tests (demonstrators) completed (5Y)
- 2) Short model construction and test (9Y)
- 3) *Magnet long prototype construction and test (11Y)*

| Resources | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 |
|--------------|------|------|------|------|------|------|------|------|------|------|
| Staff | 2 | 2 | 3 | 3.5 | 3.5 | 3.5 | 6.3 | 6.3 | 6.3 | 6.3 |
| Postdoc/GRAD | 1.2 | 1.2 | 1.8 | 2.1 | 2.1 | 2.1 | 1.8 | 1.8 | 1.8 | 1.8 |
| Student | 0.8 | 0.8 | 1.2 | 1.4 | 1.4 | 1.4 | 0.9 | 0.9 | 0.9 | 0.9 |
| Material | 300 | 500 | 750 | 845 | 750 | 750 | 1750 | 2000 | 2000 | 1500 |

Interested partners

Academia: CERN, INFN

Industry: Nb3Sn manufacturers

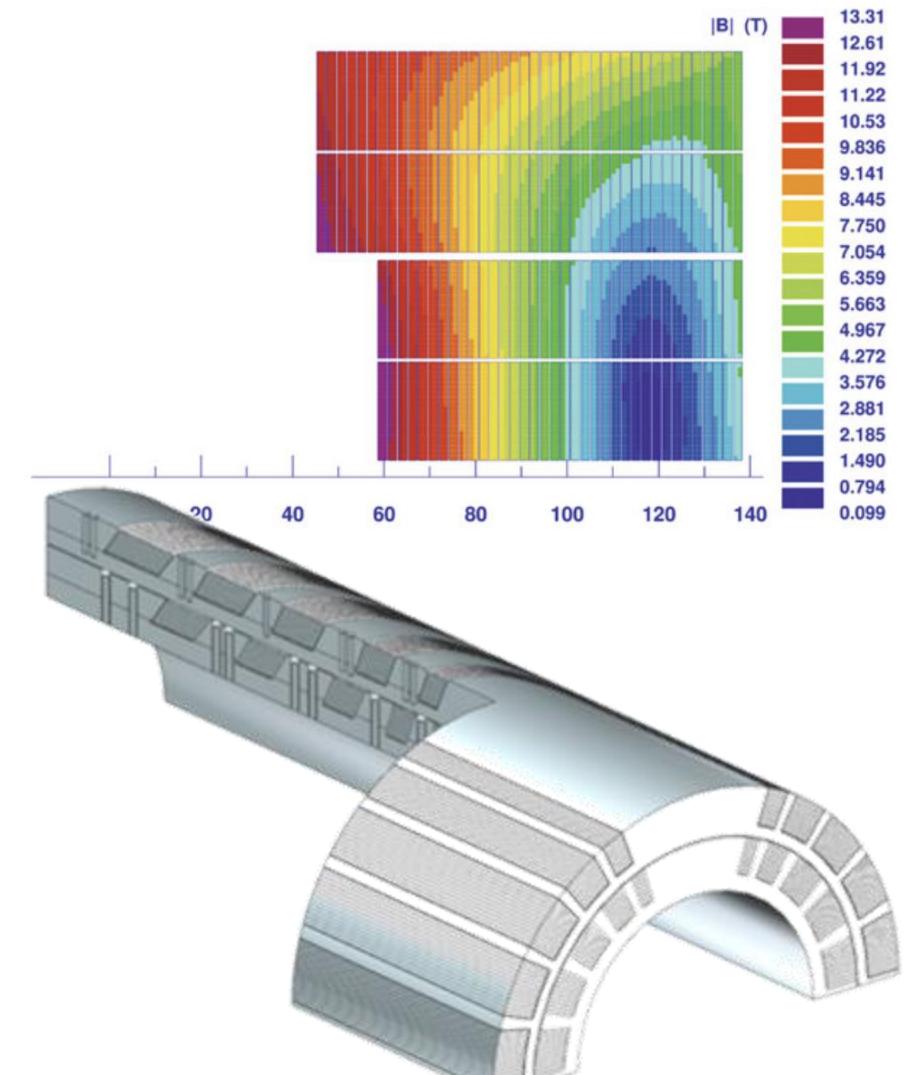

TM6 – MBHTS

Objectives

Build and test a 1 m long demonstrator for a HTS, 10 T, 30x100 mm bore dipole operating at 20 K

High-level Deliverables


- 1) Dipole magnet engineering and validation tests (demonstrator) completed (5Y)
- 2) Model construction and test (10Y)

| Resources | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 |
|--------------|------|------|------|------|------|------|------|------|------|------|
| Staff | 1.6 | 1.6 | 2.4 | 2.4 | 2.4 | 3.2 | 4 | 3.5 | 4.9 | 2.8 |
| Postdoc/GRAD | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.4 | 2.4 | 2.1 | 1.4 | 0.8 |
| Student | 1.2 | 1.2 | 1.8 | 1.8 | 1.8 | 2.4 | 1.6 | 1.4 | 0.7 | 0.4 |
| Material | 200 | 200 | 500 | 500 | 850 | 1500 | 1500 | 1250 | 1250 | 500 |

Interested partners

Academia: CERN, INFN, Technical University Tampere

Industry: Tape manufacturers

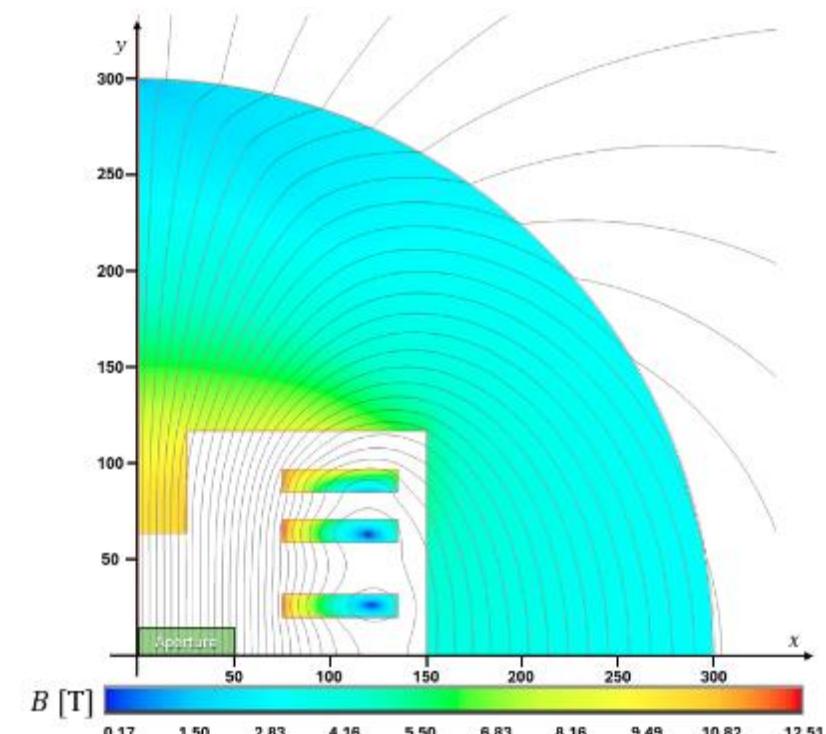

TM7 – MBHTSY

Objectives

Build and test a 1 m long demonstrator for a HTS, 14 T, 140 mm bore dipole operating at 20 K

High-level Deliverables



- 1) Dipole magnet engineering and validation tests (demonstrator) completed (6Y)
- 2) *Short model construction and test (16Y)*
- 3) *Long prototype construction and test beyond the scope of this proposal (20Y)*

| Resources | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 |
|--------------|------|------|------|------|------|------|------|------|------|------|
| Staff | 2 | 2.4 | 2.4 | 3.2 | 4 | 4 | 4 | 4 | 4.5 | 6.3 |
| Postdoc/GRAD | 1.5 | 1.8 | 1.8 | 2.4 | 2.4 | 2.4 | 2.4 | 2.4 | 2.7 | 1.8 |
| Student | 1.5 | 1.8 | 1.8 | 2.4 | 1.6 | 1.6 | 1.6 | 1.6 | 1.8 | 0.9 |
| Material | 300 | 500 | 750 | 800 | 800 | 800 | 800 | 800 | 1100 | 1250 |

Interested partners

Academia: CERN, INFN, Technical University Tampere

Industry: Tape manufacturers

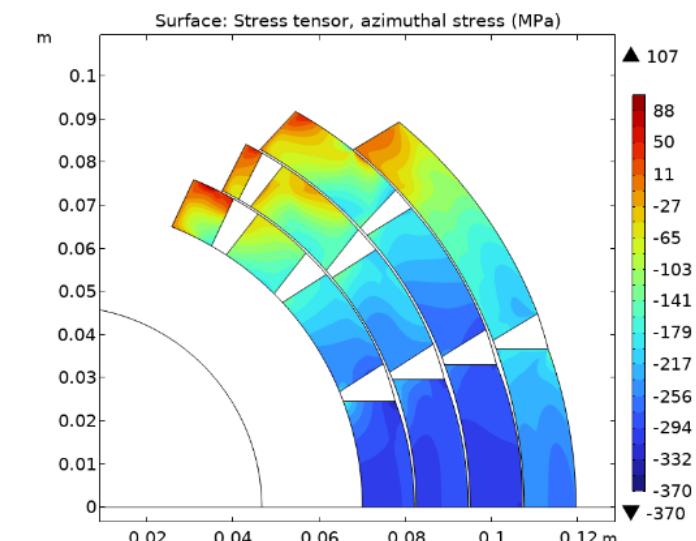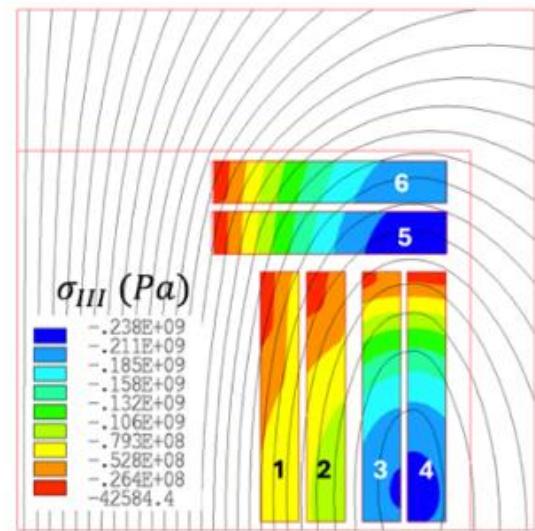

TM8 – MQHTSY

Objectives

Build and test a 1 m long demonstrator for a HTS, 300 T/m, 140 mm bore quadrupole operating at 20 K

High-level Deliverables


- 1) Quadrupole magnet engineering and first validation tests (demonstrator) completed (7Y)
- 2) *Short model construction and test beyond the scope of this proposal (16Y)*
- 3) *Long prototype construction and test beyond the scope of this proposal (20Y)*

| Resources | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 |
|--------------|------|------|------|------|------|------|------|------|------|------|
| Staff | 0 | 0 | 0 | 0 | 1.5 | 2 | 2 | 2 | 3 | 4.2 |
| Postdoc/GRAD | 0 | 0 | 0 | 0 | 0.9 | 1.2 | 1.2 | 1.2 | 1.8 | 1.2 |
| Student | 0 | 0 | 0 | 0 | 0.6 | 0.8 | 0.8 | 0.8 | 1.2 | 0.6 |
| Material | 0 | 0 | 0 | 0 | 200 | 200 | 500 | 750 | 850 | 1000 |

Interested partners

Academia: CERN, INFN, Technical University Tampere

Industry: Tape manufacturers

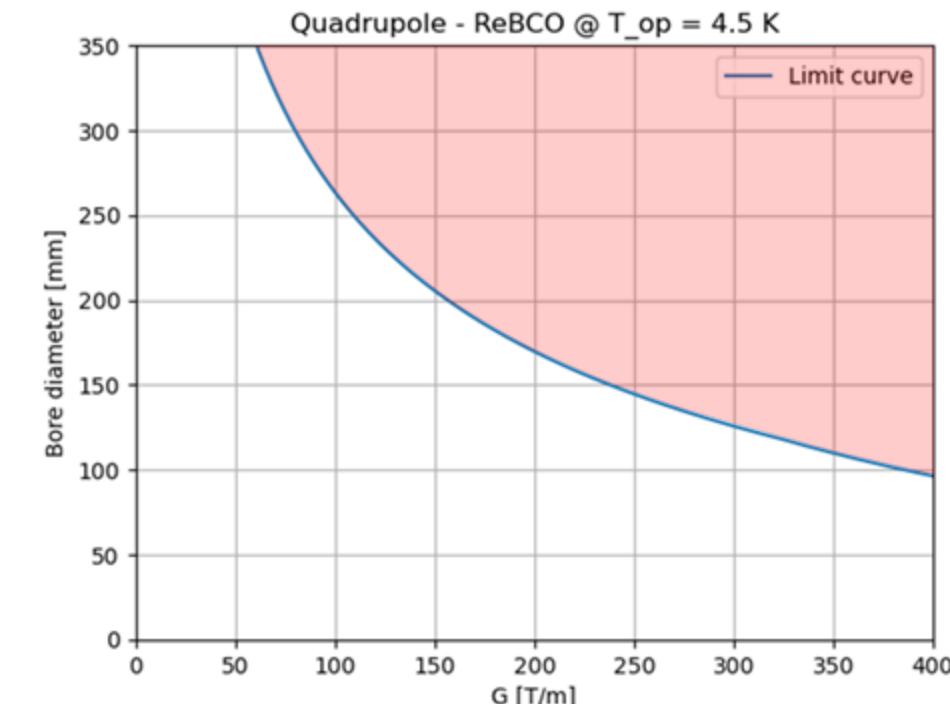

MATERIALS AND METHODS R&D

Objectives

Host and coordinate methods and materials R&D, characterization and testing common to magnet demonstrators design, manufacturing and testing

High-level Deliverables

1) HTS magnets design code (5Y)

| Resources | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 |
|--------------|------|------|------|------|------|------|------|------|------|------|
| Staff | 1.2 | 1.2 | 1.2 | 1.2 | 1.2 | 1.2 | 2.1 | 2.1 | 2.1 | 2.1 |
| Postdoc/GRAD | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.6 | 0.6 | 0.6 | 0.6 |
| Student | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.3 | 0.3 | 0.3 | 0.3 |
| Material | 200 | 200 | 200 | 200 | 200 | 400 | 400 | 400 | 400 | 400 |

Interested partners

Academia: CERN, INFN, University of Twente, University of Southampton, Technical University Tampere, KEK

Industry:

- High-field measurement of **transport properties of REBCO conductors**, also necessary to define scaling laws required for the design and analysis of the magnet demonstrators;
- **Micrography, Micro-structure and mechanical properties** of REBCO conductors and winding;
- **Radiation effects** in REBCO conductors;
- Tailored experiments to establish **design rules for HTS magnets**, e.g. allowable hot-spot temperature, or allowable peak stress and strain;
- **Multi-physics modeling** of transient electromagnetics, mechanics and thermal fields in HTS magnets, relevant to the electro-mechanical design, operation and quench protection of NI HTS magnets.