

LUXE at ELBEX


Matthew Wing
for the LUXE collaboration

- Strong-field QED physics
- LUXE experiment
- LUXE physics expectations
- Closing words





Why do we care about strong-field QED ?


Fundamental science

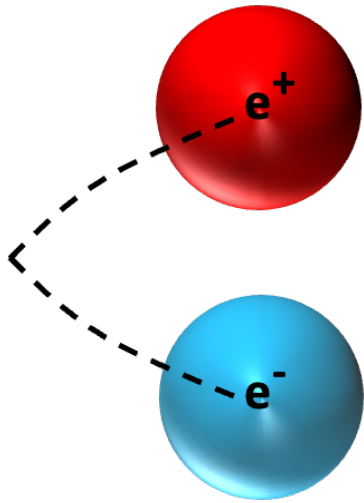

Higgs factories

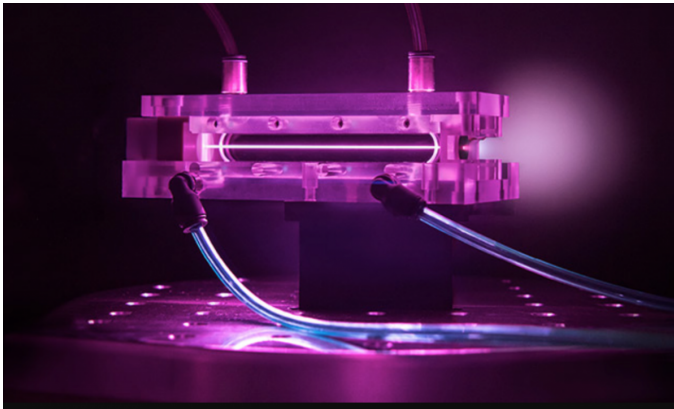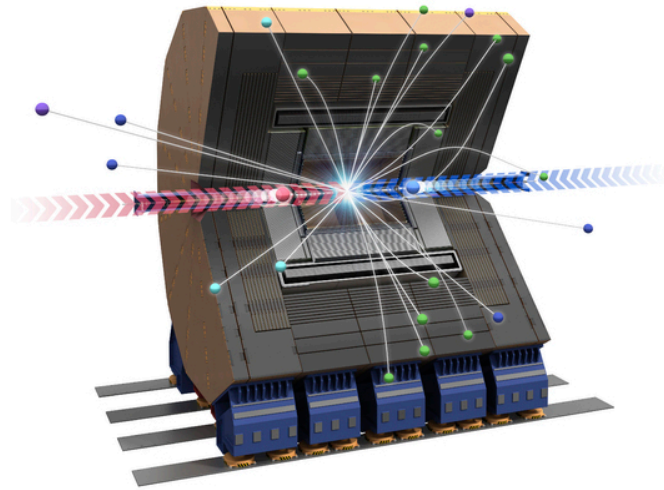


Laser physics and novel accelerators

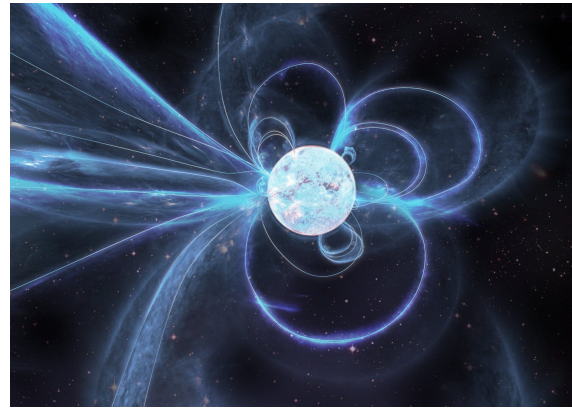

Neutron stars, black holes, etc.

Introduction: Strong-field QED

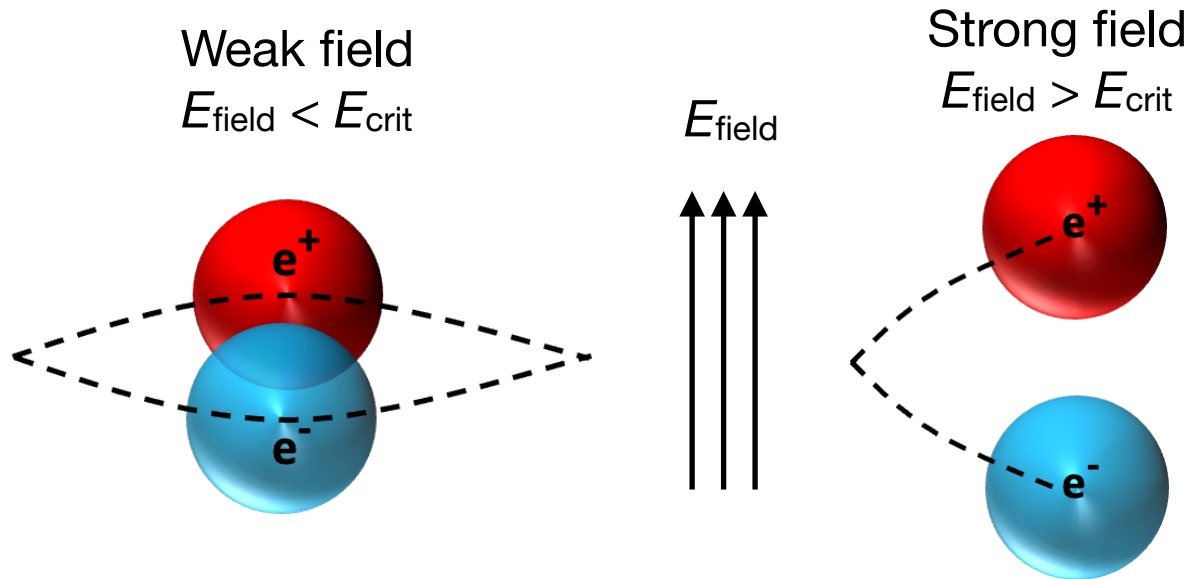


Critical field or Schwinger limit:

$$E_{\text{crit}} = \frac{mc^2}{e\lambda_C} = \frac{m^2c^3}{e\hbar} = 1.3 \times 10^{16} \text{ V/cm}$$

← **Never achieved to date !
10,000× greater than
world's largest lasers.**

Introduction: Strong-field QED


Laboratory frame

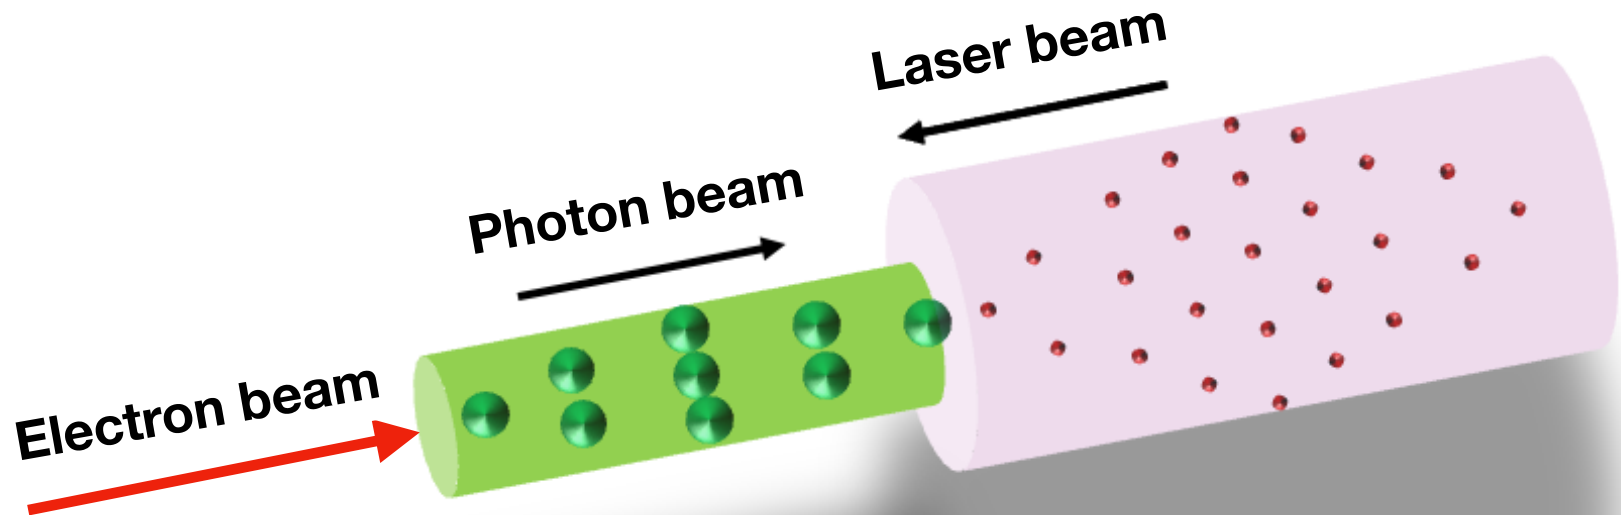

- Critical field can be reached with relativistic length contraction.

Introduction: Strong-field QED

Boosted frame

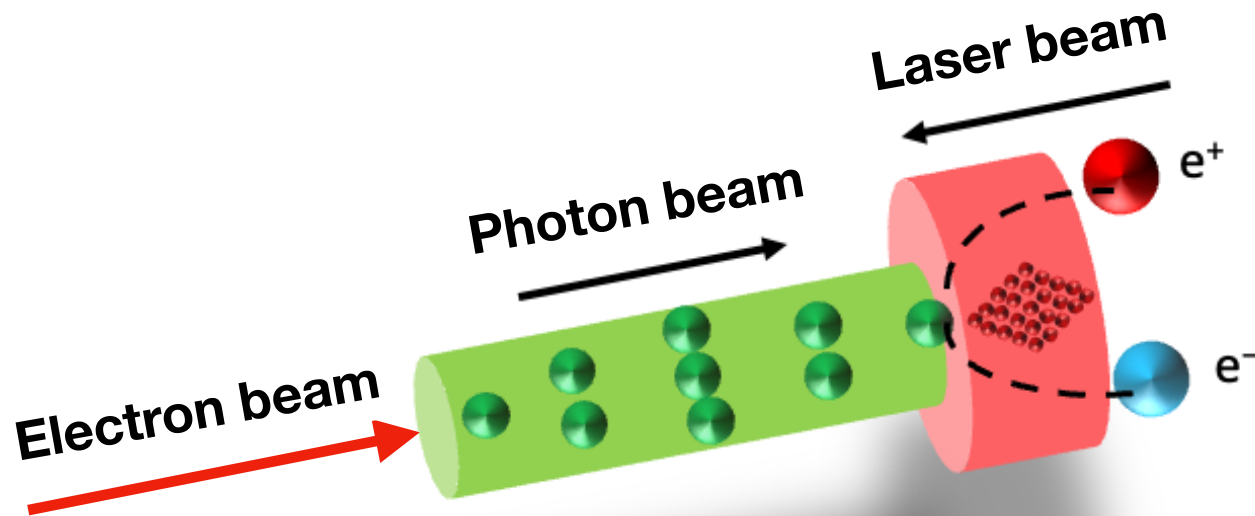


- Critical field can be reached with relativistic length contraction.
- Relativistically boosted field $\chi = \gamma E_L / E_{\text{crit}}$

Introduction: Strong-field QED

- LUXE: **L**aser **U**nd **X**FEL **E**xperiment
 - A proposed experiment exploiting the European XFEL electron beam.
 - In conjunction with a high-power laser.



Boosted frame

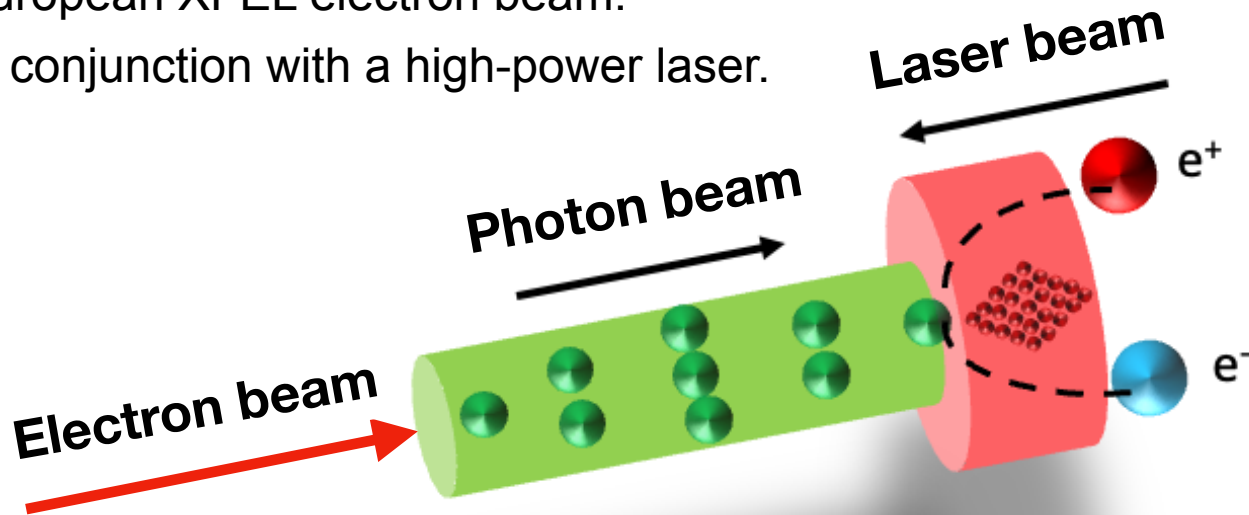

- Investigate QED in new parameter space
 - E.g. transition to non-linear QED.
 - With high precision and control.

Non-linear Compton scattering

16.5 GeV electron, 800 nm laser, 17.2° crossing angle

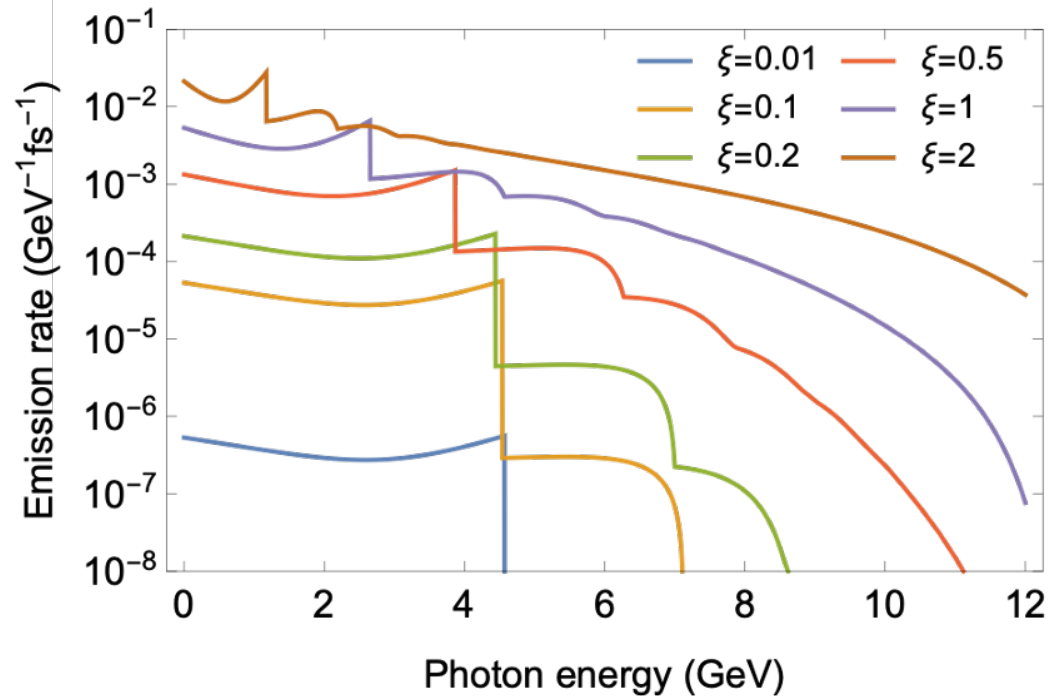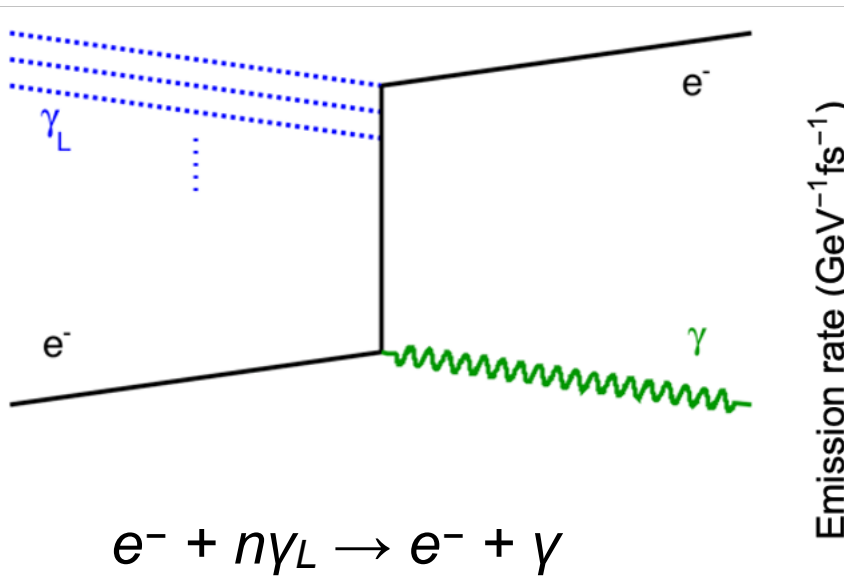

In strong fields, electrons obtain larger effective mass, $m_* = m_e (1 + \xi^2)^{1/2}$

- Compton edge shifts as function of ξ (square root of laser intensity).
- Higher harmonics appear, i.e. interaction with n laser photons.


Strong-field QED:

$$E_{\text{edge}}(\xi) = E_e \frac{2n\eta}{2n\eta + 1 + \xi^2}$$

Classical limit:


$$E_{\text{edge}}(\xi) = E_e \frac{2n\eta}{1 + \xi^2}$$

Non-linear Breit–Wheeler pair production

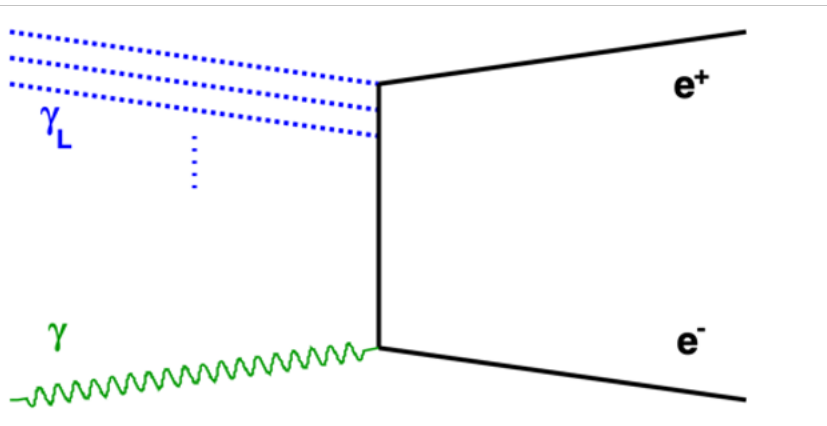

$$\gamma + n\gamma_L \rightarrow e^+ + e^-$$

- Photon from Compton scattering or secondary beam.

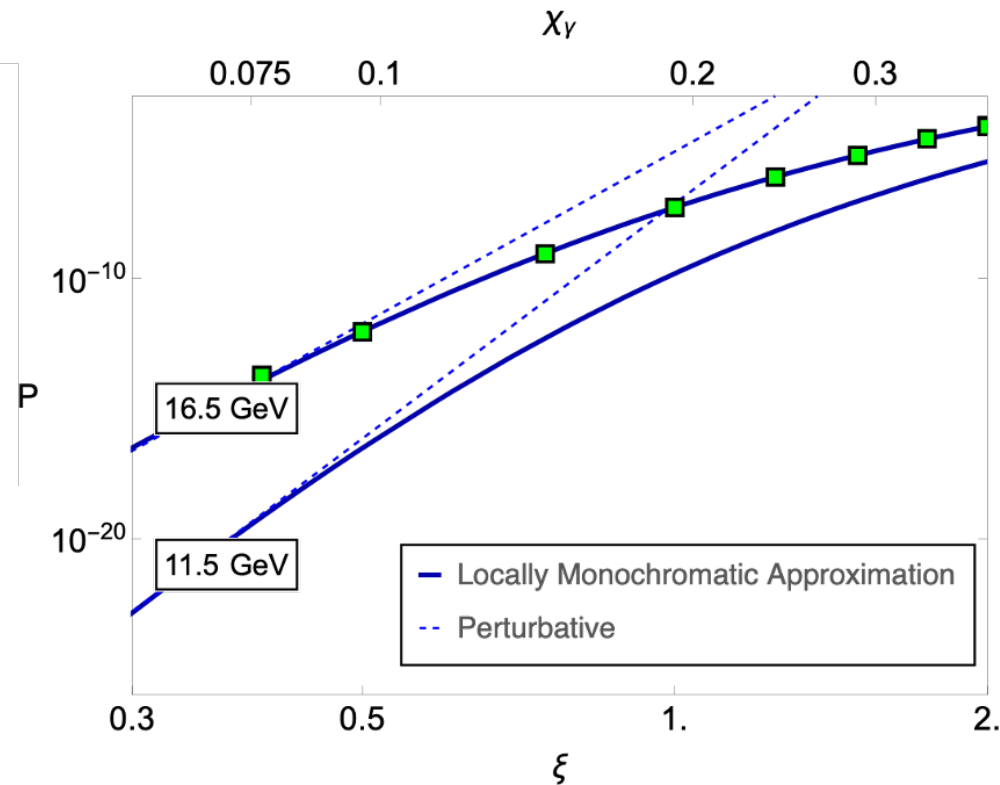

Perturbative regime: power law


$$\xi \ll 1 \quad : \quad R_{e^+} \propto \xi^{2n} \propto I^n$$

Non-perturbative regime

$$\xi \gg 1 \quad : \quad R_{e^+} \propto \chi_\gamma \exp\left(-\frac{8}{3\chi_\gamma}\right)$$

E144 experiment at SLAC


- Pioneering experiment, E144, at SLAC in the 1990s.
- Used 1 TW laser and 46.6 GeV electron beam.
- Reached $\chi \sim 0.25$, $\xi \sim 0.4$.
- Observed process
$$e^- + n\gamma_L \rightarrow e^- + e^+ + e^-$$
- Observed start of ξ^{2n} power law, but not departure from it.

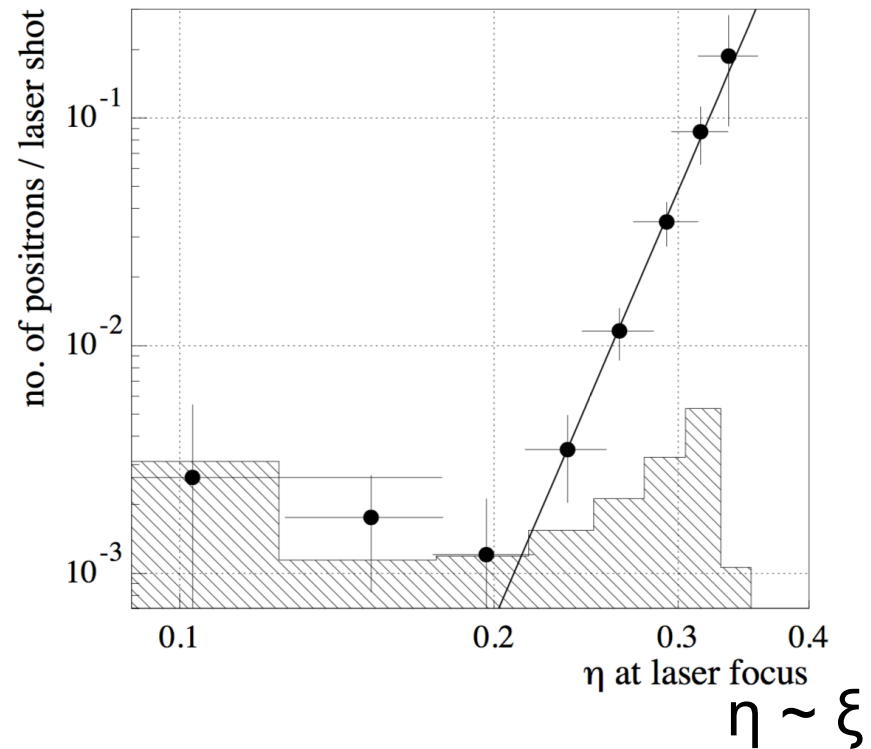

E144 Coll., C. Bamber et al., Phys. Rev. D 60 (1999) 092004;

T. Koffas, "Positron production in multiphoton light-by-light scattering",
PhD thesis, University of Rochester (1998), SLAC-R-626.

Strong-field QED parameter space

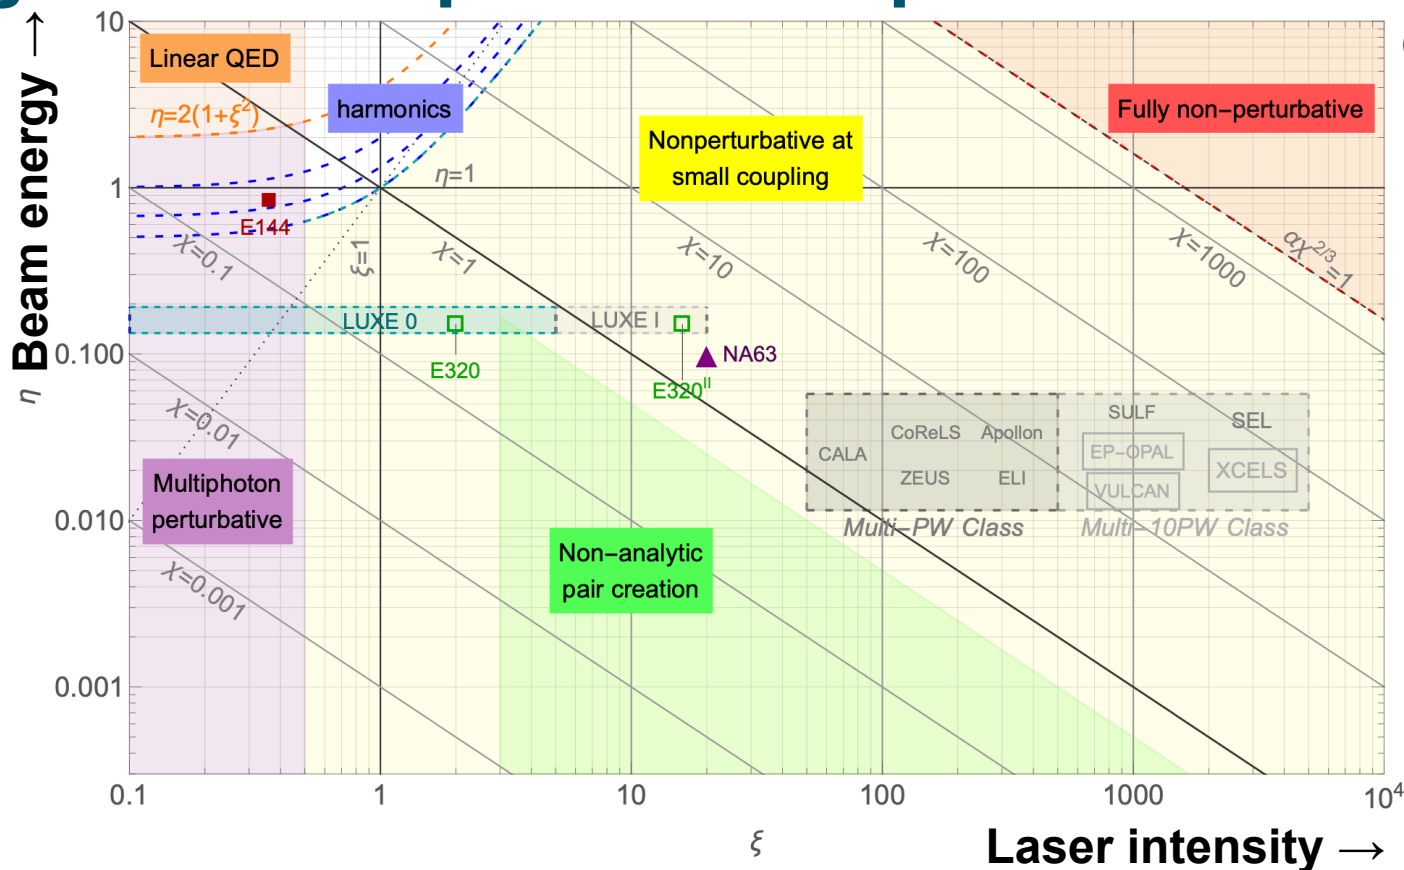



- Determined by particle beam energy and laser intensity.
- LUXE will precisely map parameter space in transition region.
- E320: new experiment at SLAC.
- ELI, etc. future high-power lasers.

LUXE experiment

LUXE at European XFEL




EuXFEL electron beam:

- Energy: 16.5 GeV
- Bunch: $1.5 \times 10^9 e^-$
- Repetition rate: 10 Hz
- Use 1 of 2700 bunches per train

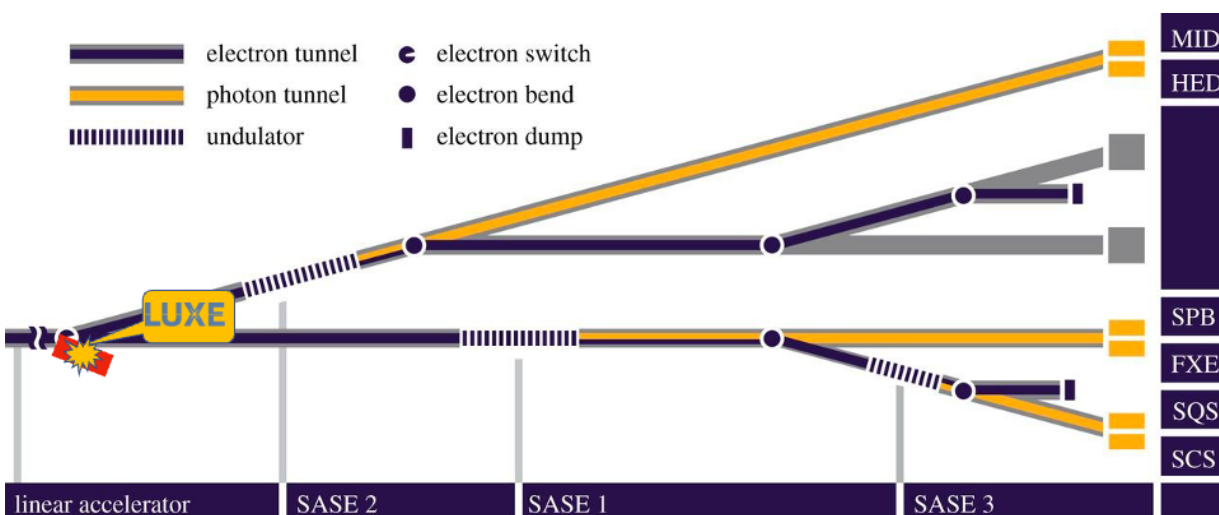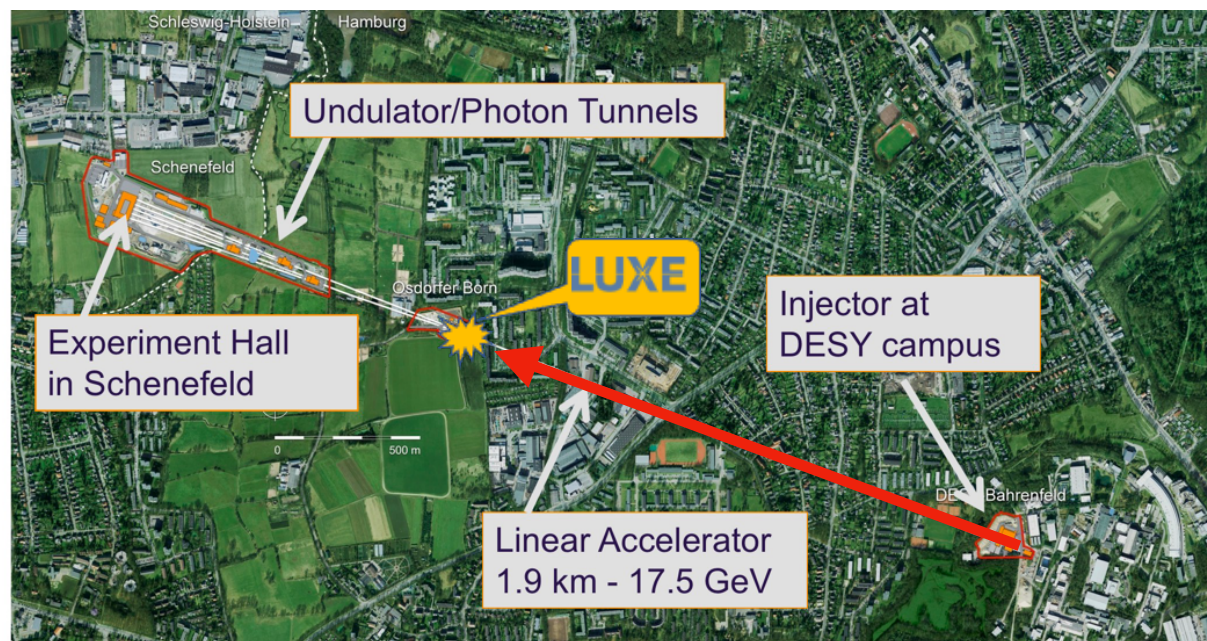

- Use electron beam before undulators
- Extract bunch to area planned for second fan
- No impact on photon science programme

LUXE experimental area

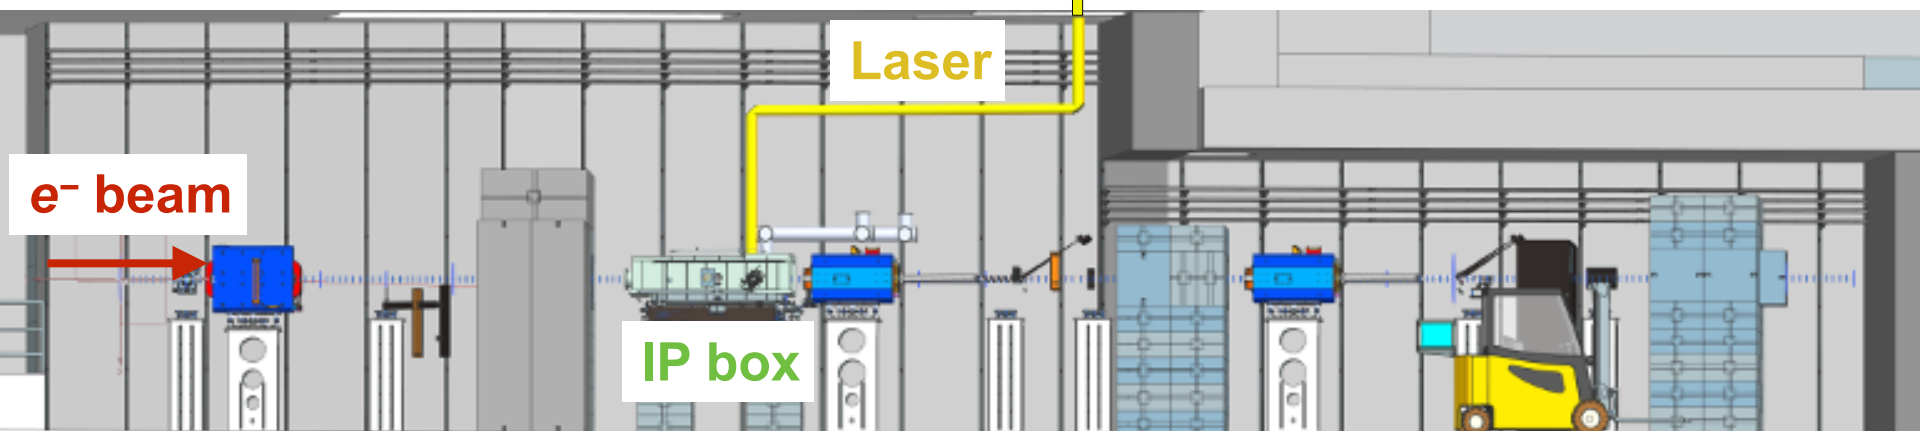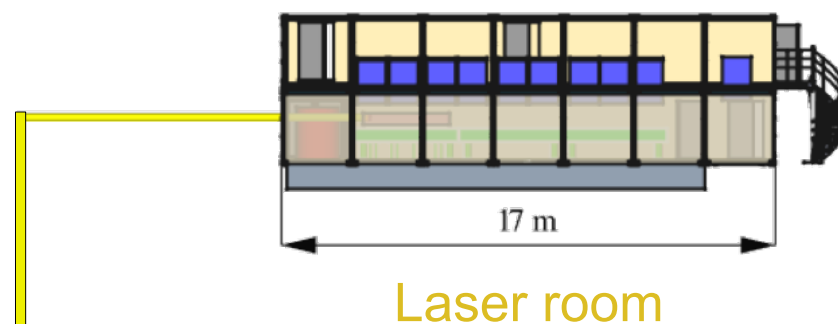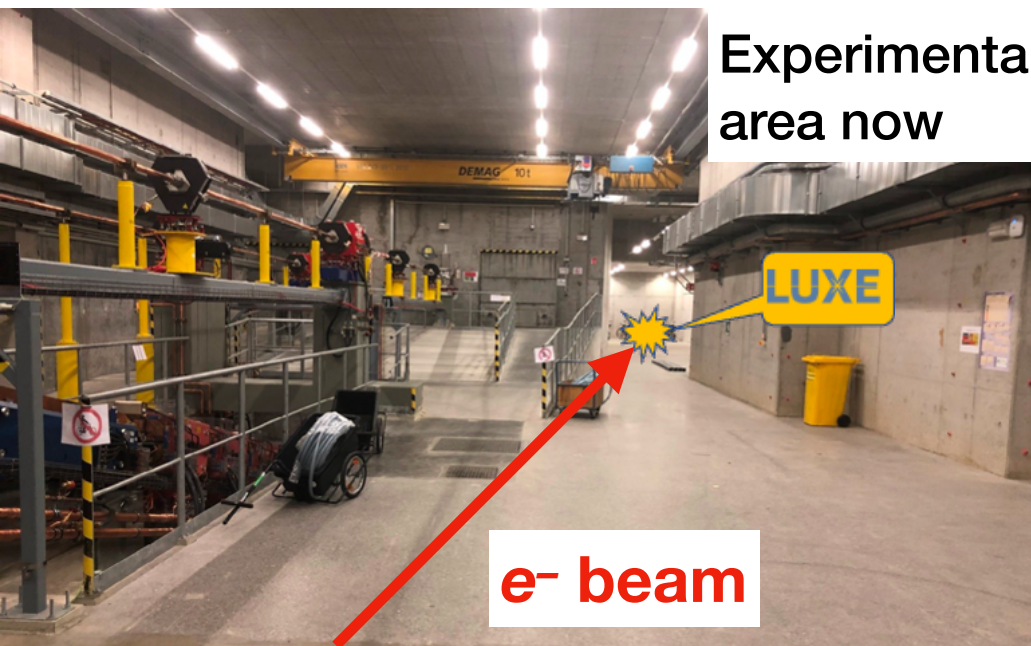

LUXE laser

Wavelength (energy)	800 nm (1.55 eV)
Power	40 / 350 TW
Pulse length	30 fs
Spot size	$> 3 \mu\text{m}$
Peak intensity	$13.3 / 120 \times 10^{19} \text{ W/cm}^2$
Peak intensity parameter ξ	7.9 / 23.6
Peak quantum parameter χ	1.5 / 4.5

- Phases:
 - Phase-0 with a 40 TW laser (JETI40)
 - Upgrade to 350 TW laser for Phase-1


- Repetition rate, 1 – 10 Hz
- Crossing angle, 17°



- Goal: $< 5\%$ uncertainty on laser intensity, 1% shot-to-shot uncertainty.


Experiment layout

***e*-laser setup (Not in scale)**

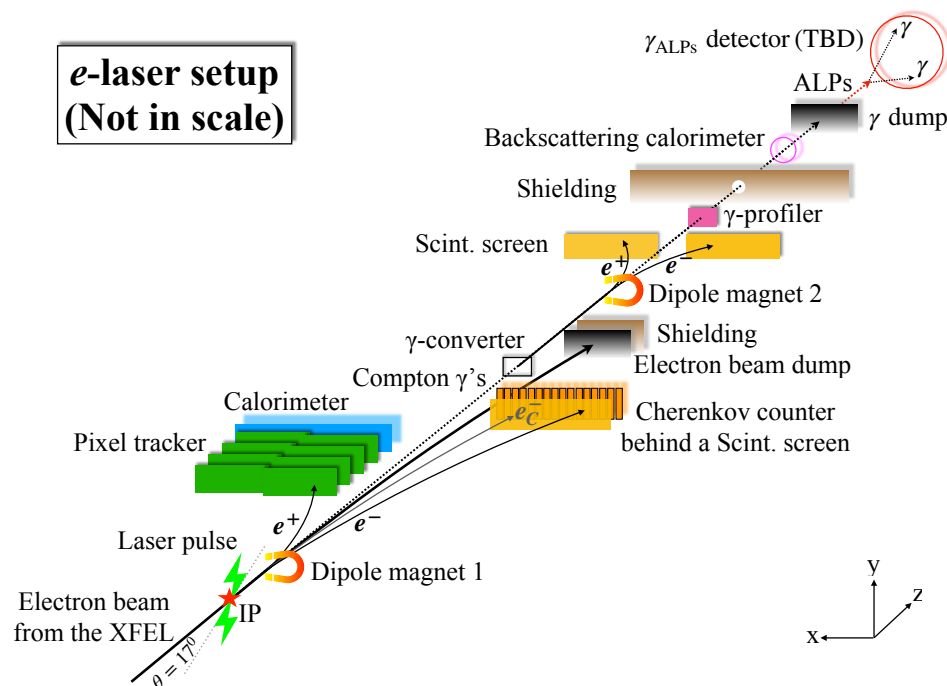

- Two data-taking modes:
 - Electron–laser collisions
 - Photon–laser collisions: unique to LUXE

***γ*-laser setup (Not in scale)**

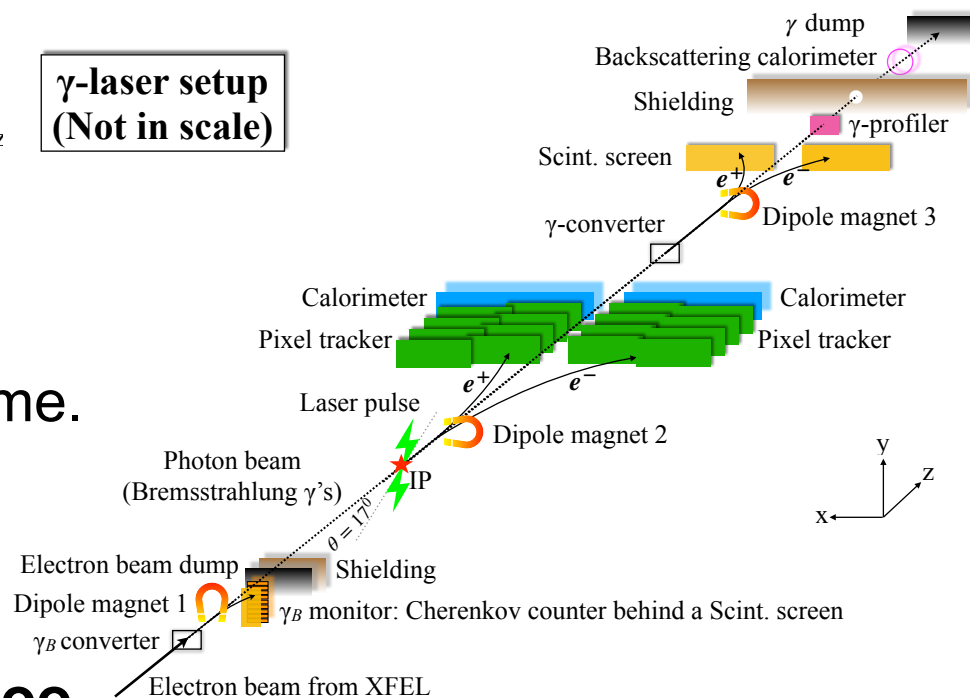


- Similar but different layouts.
- Many of the detectors are the same.
- Several challenges.


Note ALPs physics programme too.

Detector requirements and challenges

- Want to detect electrons, positrons and photons in the $O(\text{GeV})$ range.
 - Measure fluxes and energy spectra.
- Detector technology to cater for varying fluxes of signal and background.
 - Fluxes vary between $\sim 10^{-4}$ (e^+) and 10^9 (e^- and γ).

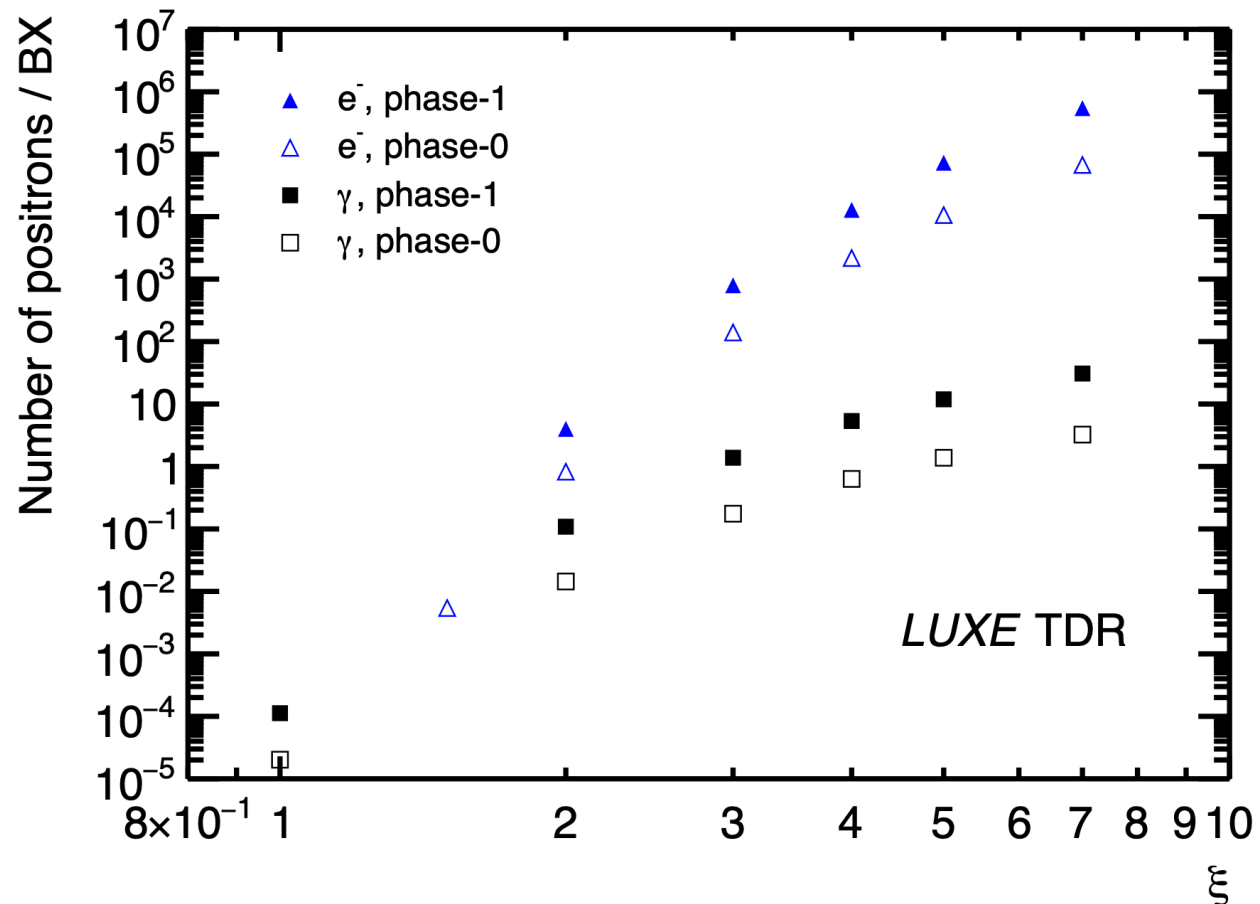




IP detectors

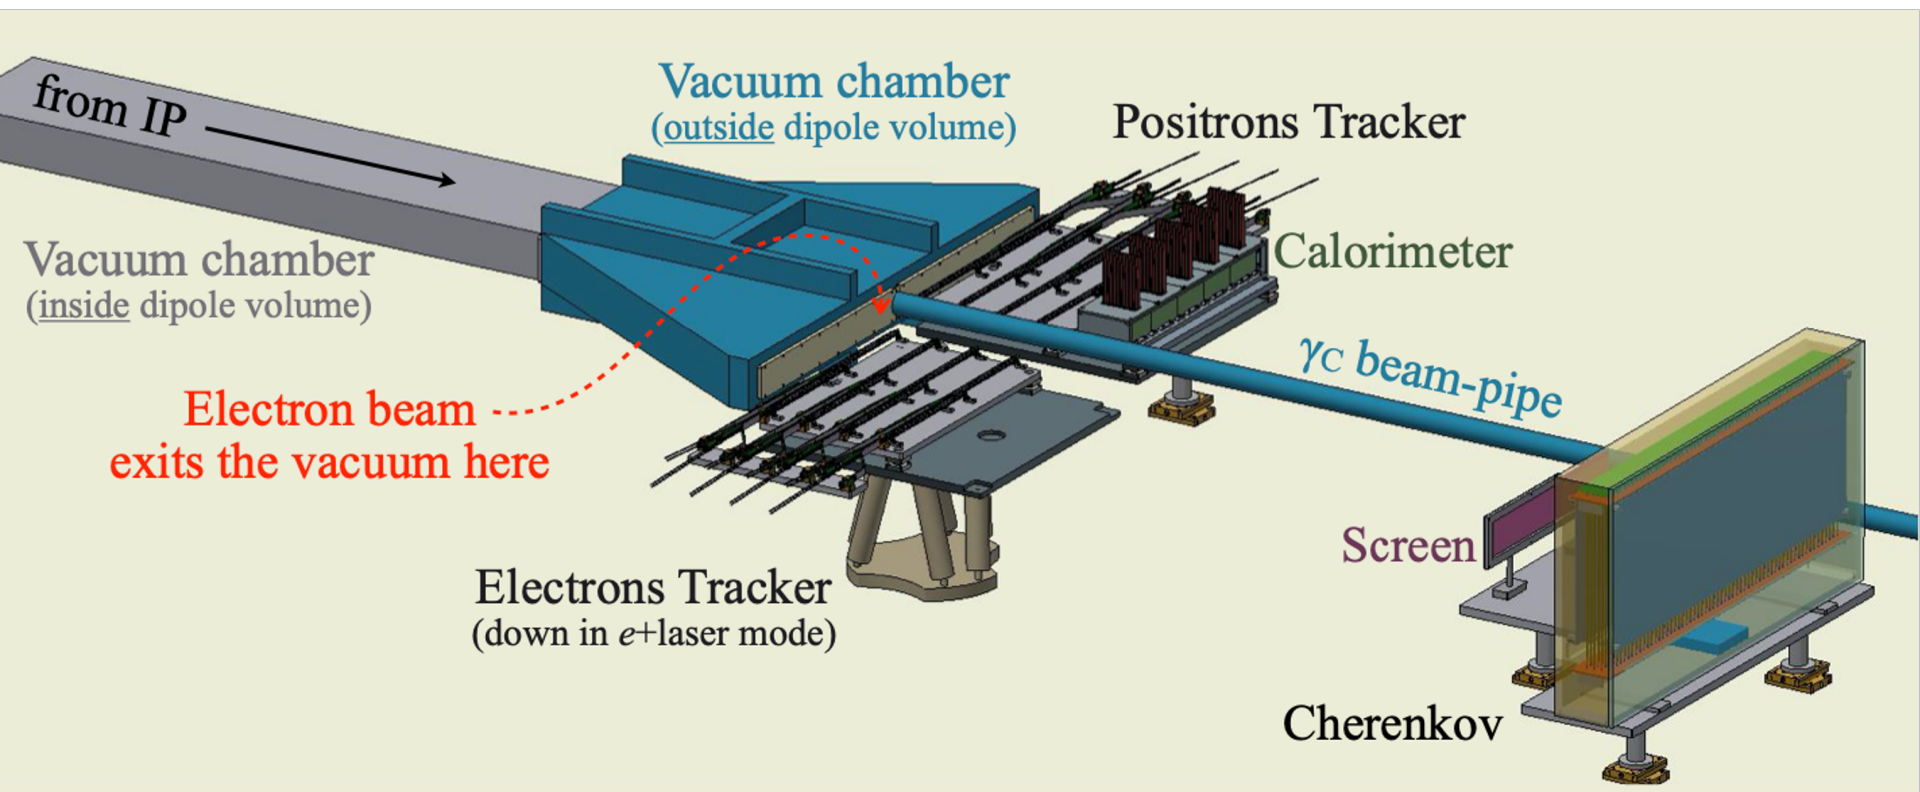


- Two complementary detector technologies per measurement:
 - Different sensitivities, cross calibration, reduction of systematic uncertainties.
- In-situ measurements of beam backgrounds when laser not on.

High-rate electron detectors

- A scintillation screen and camera is inexpensive, flexible and simple with good position resolution.

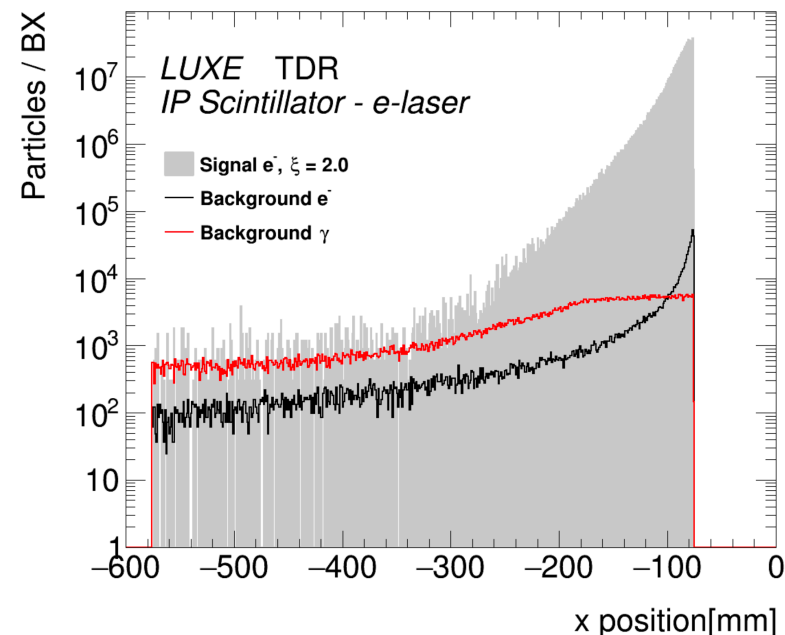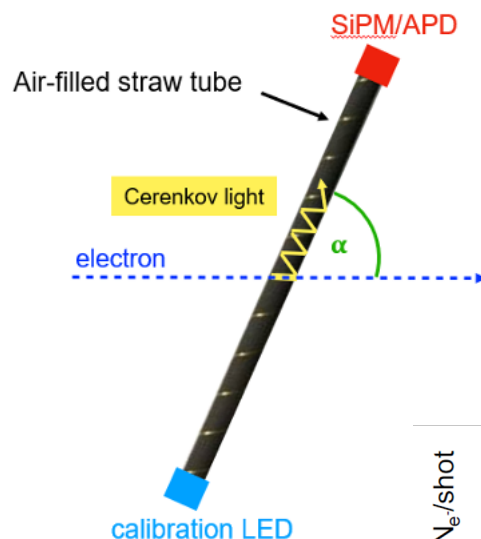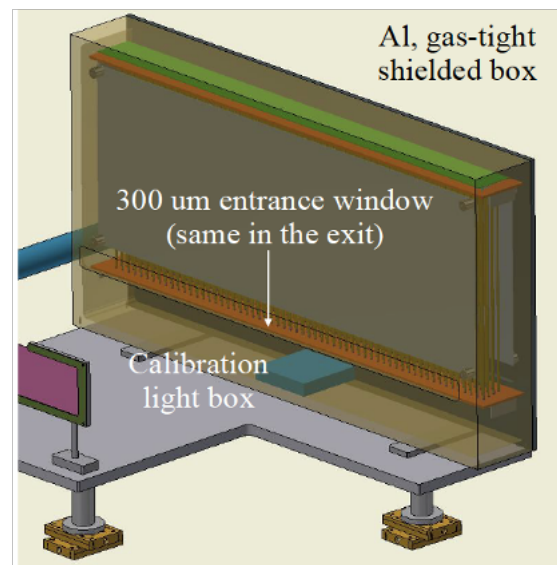


- Finely segmented ($\varnothing = 4 \text{ mm}$) air-filled channel (reflective tubes as light guides).
 - Charged particles create Cherenkov light.
 - Recent tests at E320.


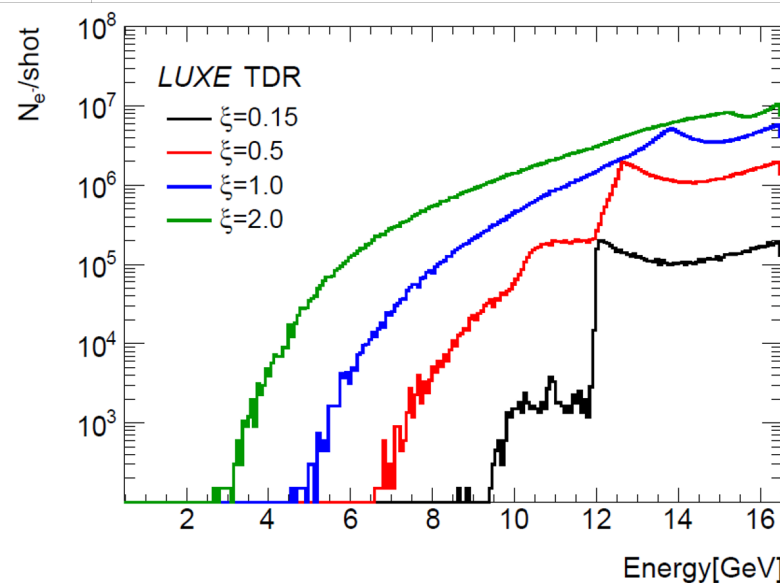


Positron detectors

- Pixel tracker:
 - 4 layers each of which has 2 staves.
 - Each stave is $27 \times 1.5 \text{ cm}^2$ built from 9 ALPIDE chips, $3 \times 1.5 \text{ cm}^2$.


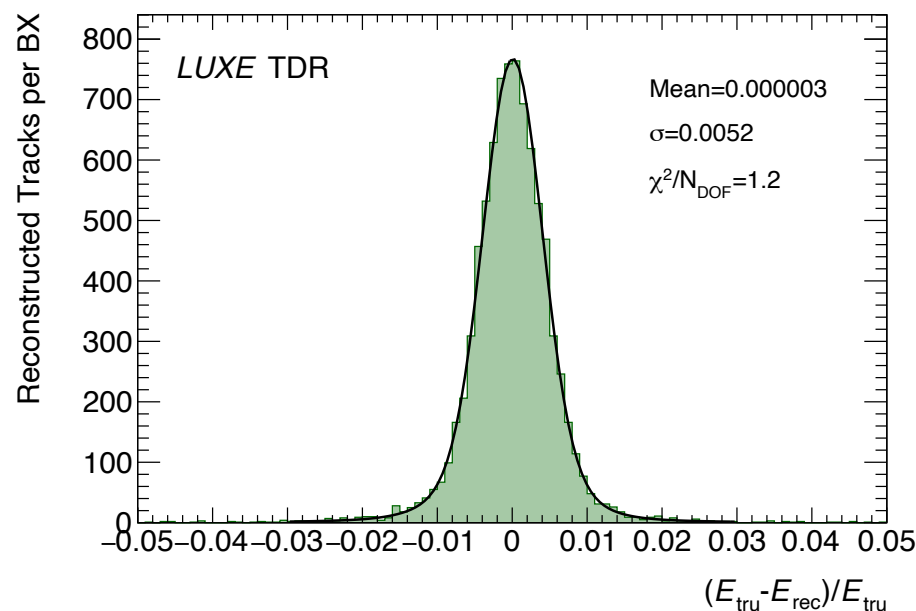


- High granularity, compact, sampling calorimeter.
 - Based on technology developed by (LC) FCAL collaboration.
 - 20 layers of 3.5 mm tungsten.
 - Energy resolution $\sigma/E = 20\%/(E/\text{GeV})^{1/2}$, position $\sim 750 \mu\text{m}$.

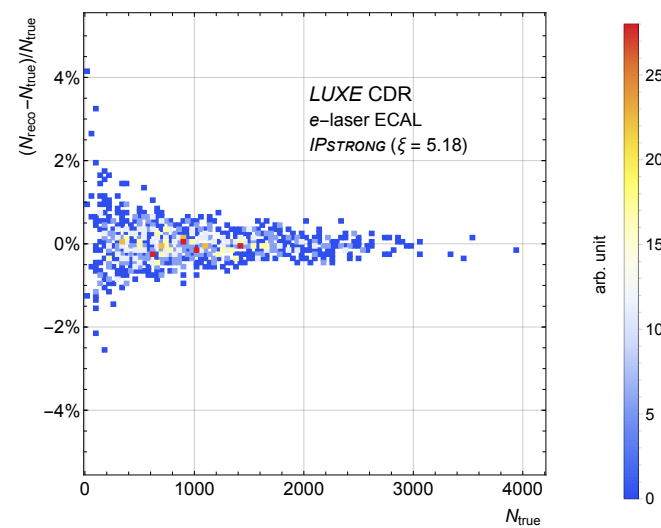
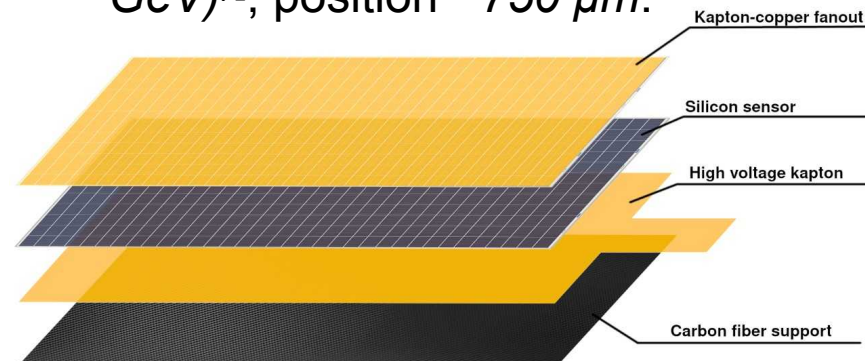


Gamma-ray detectors

Beam profiler

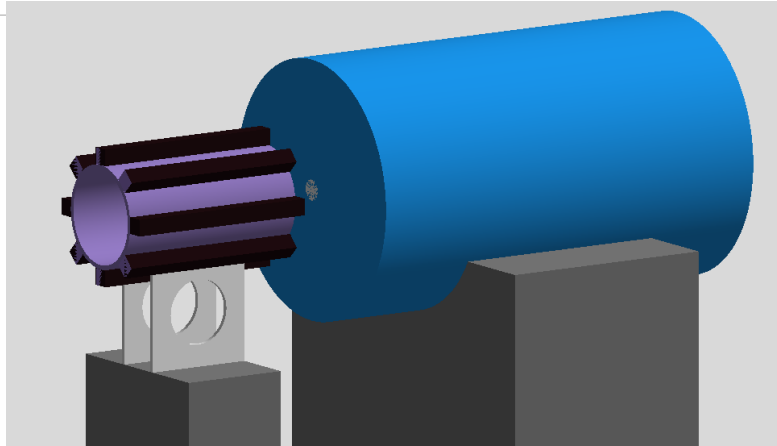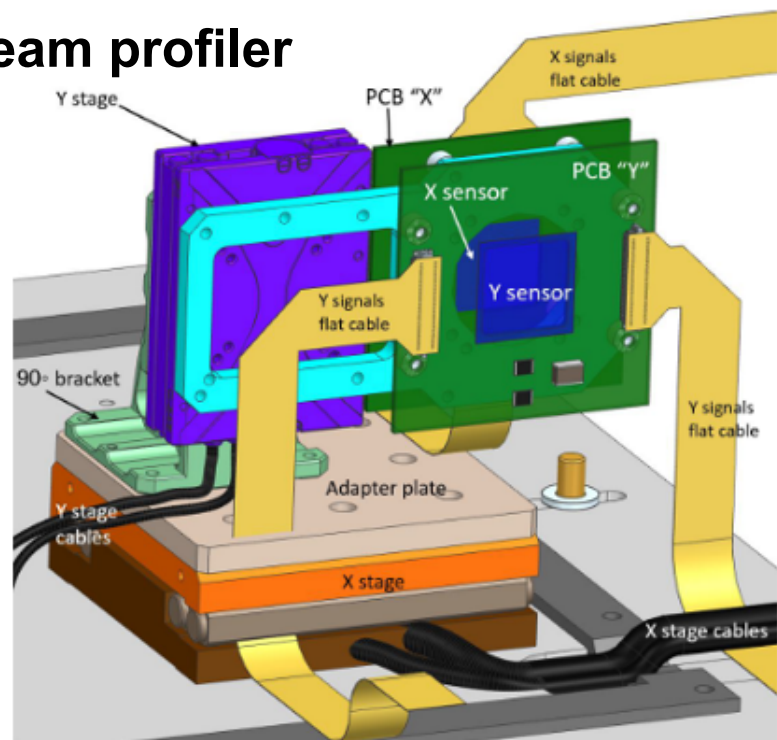


Spectrometer

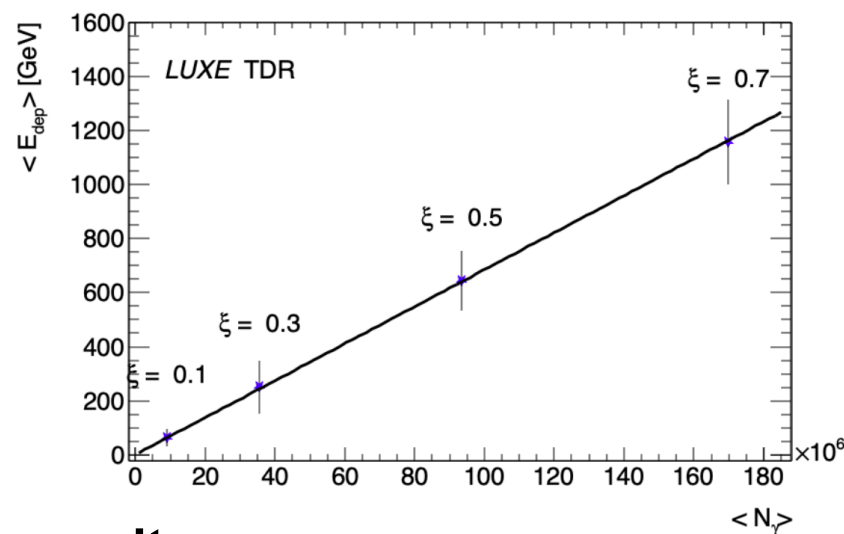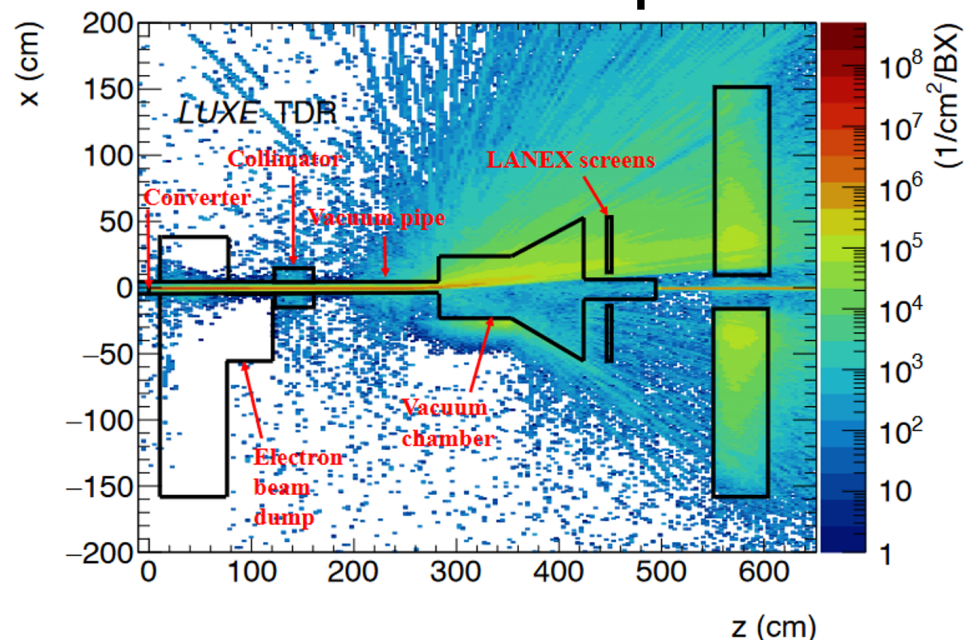


Flux monitor

Layout — more engineering-like

CAD:

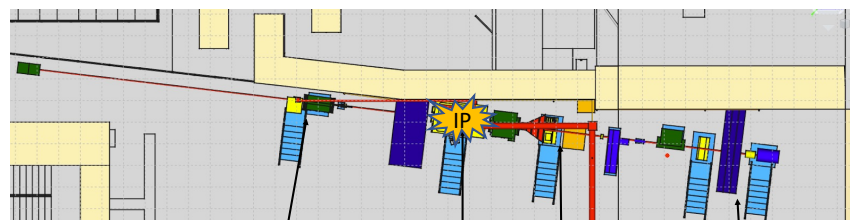

top view of experimental area

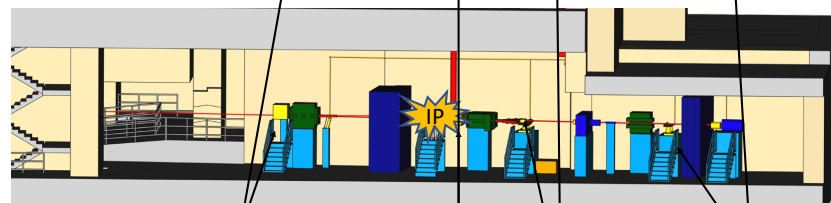

side views of experimental area


Bremsstrahlung
Target

Interaction
Point

IP detectors

Gamma forward
spectrometer


Full Geant4 simulation:

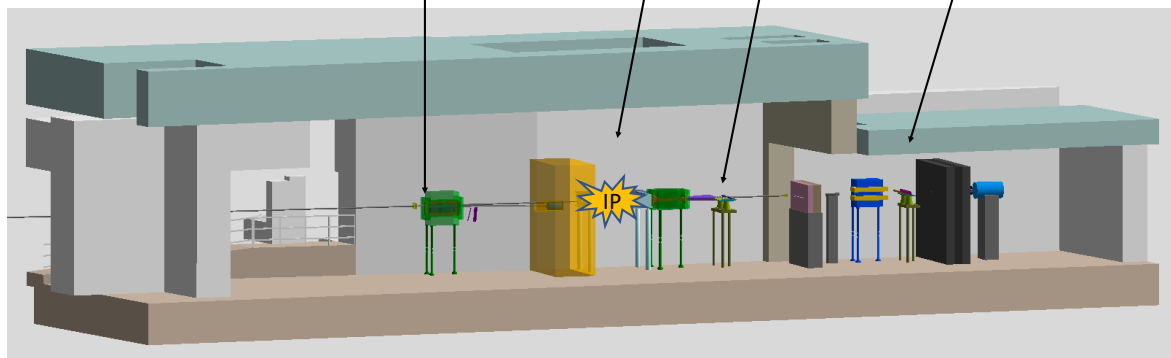

Advanced design that fits into hall at end of ELBEX beamline.

LUXE physics expectations



Strong-field QED parameter space

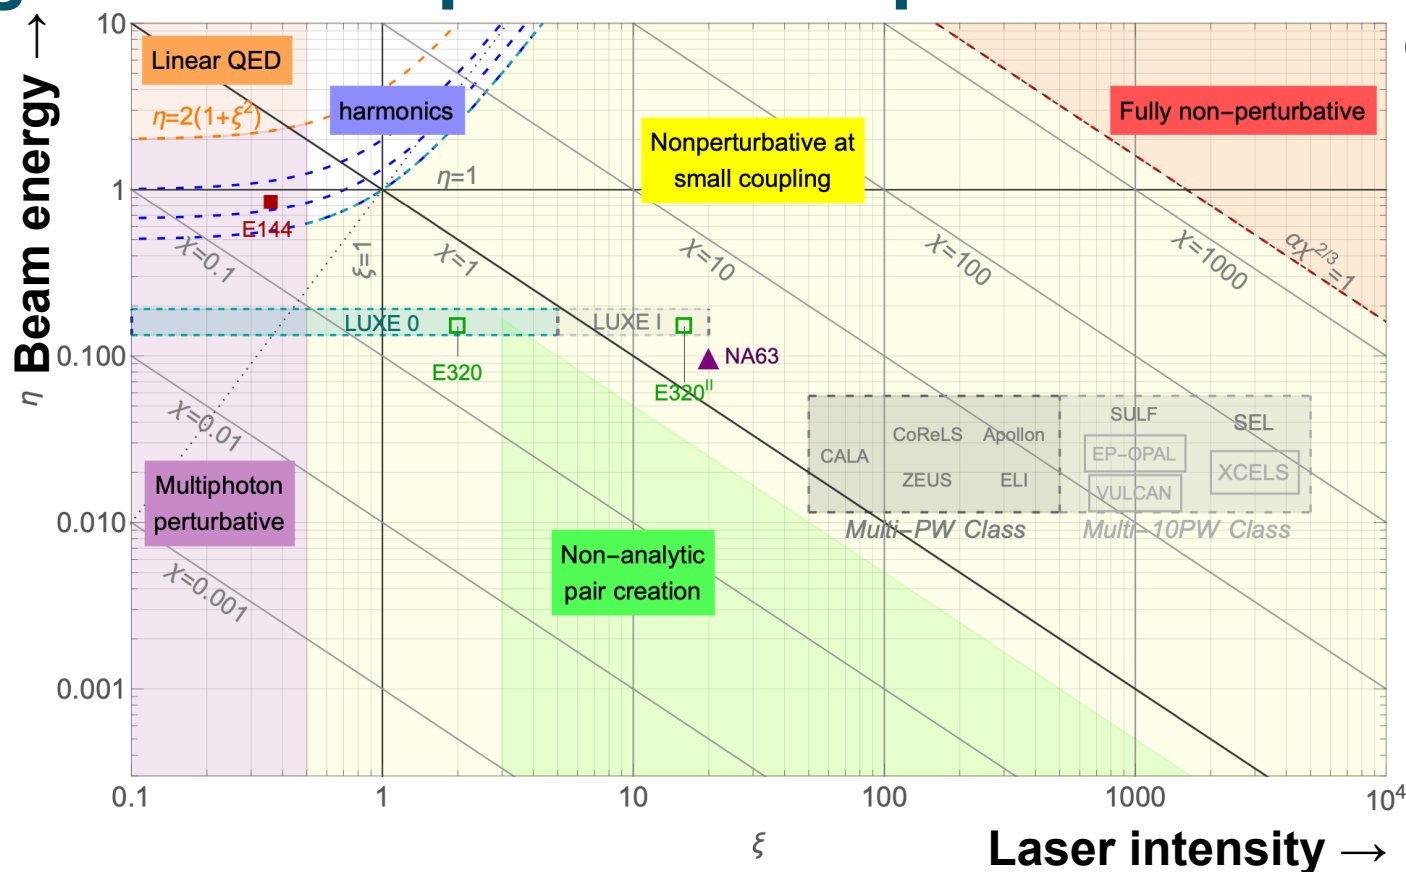

Credit:
B. King

- Aim to map significant part of phase space.

Expected results

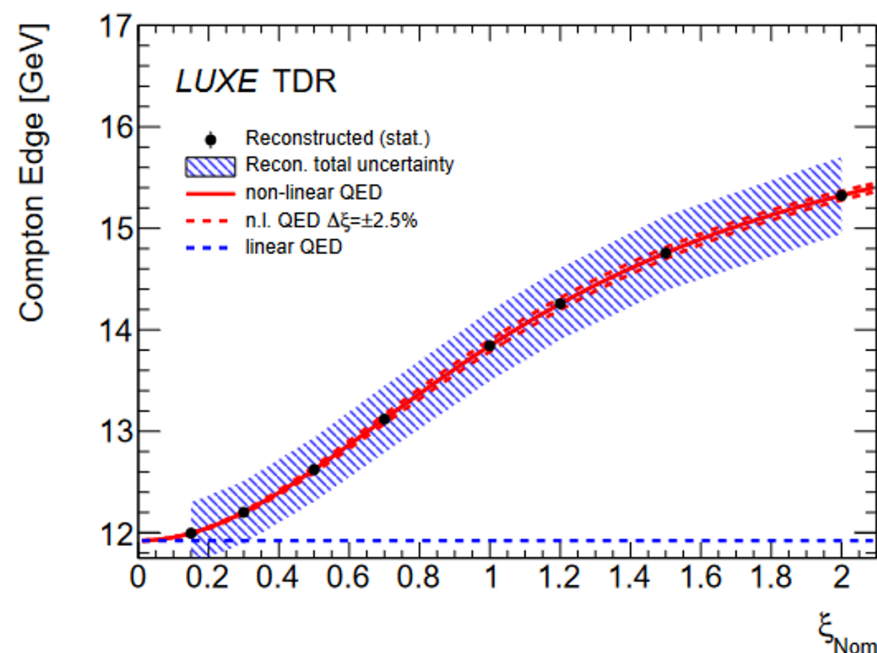
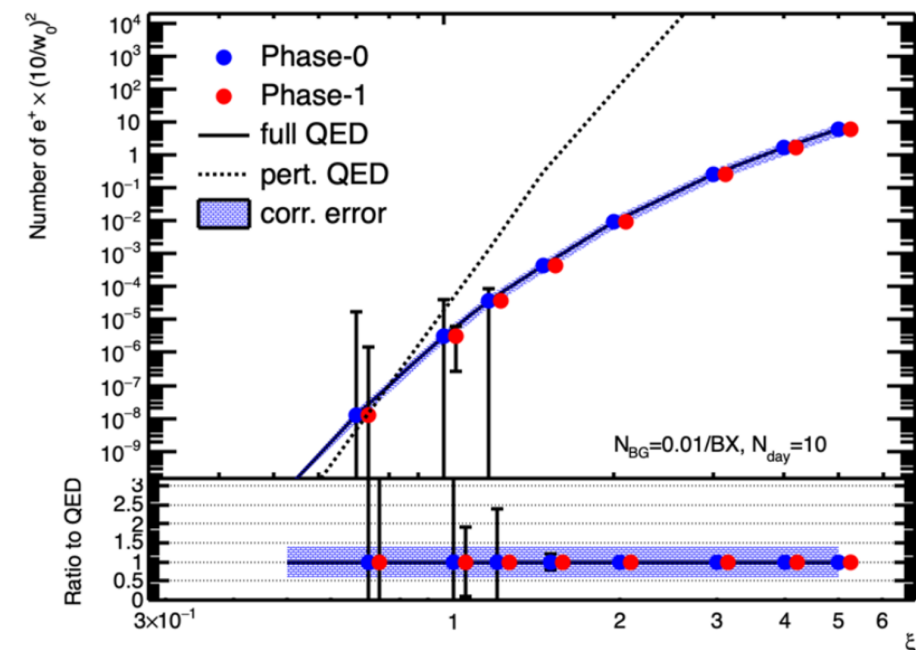


- Number of Breit–Wheeler pairs produced in γ –laser collisions.
- Assume 10 days of data taking and 0.01 background events/BX.
- 40% correlated uncertainty illustrates effect of uncertainty on ξ .

- Compton edge position as a function of ξ in e –laser collisions.
- Assuming 1 hour data taking, no background.
- Illustrative 2% energy scale uncertainty.

Search for new particles, ALPs

- $\sim 1\text{ m}$ long detector, $\sim 2.5\text{ m}$ after photon dump.

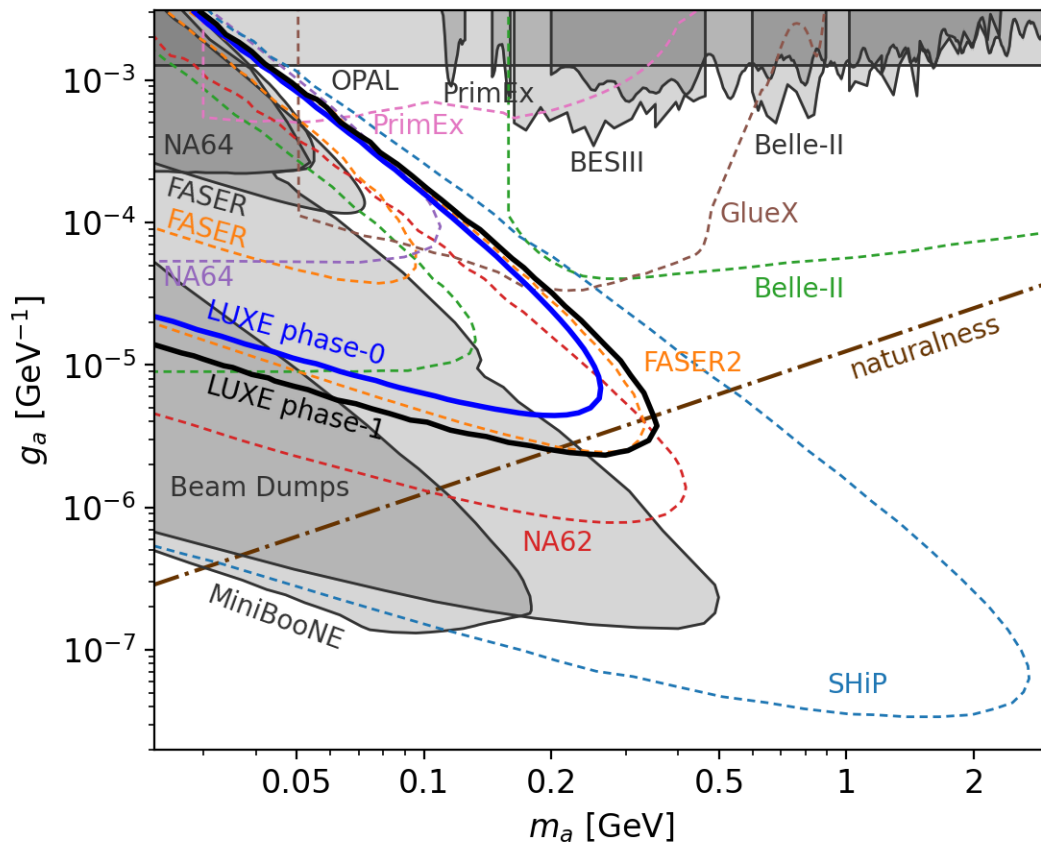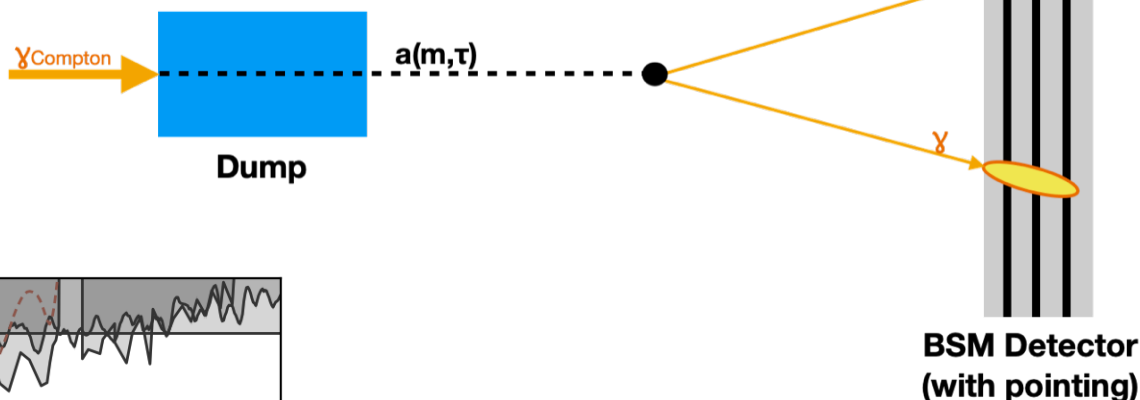

- Search for axion-like particles or milli-charged particles.
- High-flux photon beam offers potential.
 - ➔ Should look asap !

LUXE-NPOD: Z. Bai et al.,
Phys. Rev. D **106** (2022) 115034,
 arXiv:2107.13554.

Closing

LUXE status and planning

- LUXE initiated in 2017.
- Officially recognised as a DESY experiment in November 2022.
- About 20 institutes; 100 people.
- Technical Design Report published by Eur. Phys. J.
- Experiment could be realised quite quickly.



Possible timeline



CDR: H. Abramowicz et al.,
Eur. Phys. J. ST **230** (2021) 2445,
 arXiv:2102.02032.

TDR: H. Abramowicz et al.,
Eur. Phys. J. ST **233** (2024) 1709
 arXiv:2308.00515.

LUXE status and funding

- The ELBEX beamline is essential for LUXE and a boost to the project.
- We have agreement from Jena that they will give us their JETI40 laser.
- We have LUXE institutes who will provide detectors and expertise.
- There are further bits of infrastructure (laser beamline, room, computing, etc.) which need to be funded.
 - This will give us LUXE Phase-0.
 - Looking at how this can be done, also within DESY budget.
 - Would like to have “CD2” approval from DESY this year.
 - Obviously need to convince EuXFEL of our proposal.
- Continue to look for extra resources for e.g. Phase-1.
- Plan for 1 year of running for each of Phase-0 and Phase-1 and e–laser and γ –laser modes


Summary

- **LUXE is an exciting new experiment to investigate QED in uncharted territory.**
- What makes LUXE unique ?
 - The exquisite initial electron beam.
 - 24/7 running.
 - e-laser and γ -laser modes.
 - Comprehensive suite of detectors.
 - Strong collaboration with a broad range of expertise.
- High precision measurements — large samples, controlled systematics.
- Measure over a broad range of quantum parameters, in particular the transition region to non-linear QED.
- Serious confrontation of experiment and theory.

Back-up

Strong-field QED

- QED is one of the most thoroughly tested theories with measurements and perturbative calculations performed to high precision.
- The region of strong fields is less well-known, although they are present:
 - ➔ In magnetars and other astrophysical phenomena.
 - ➔ In atomic and laser physics.
 - ➔ In high-energy colliders, e.g. ILC or CLIC.
- LUXE will investigate the strong-field regime, where QED becomes non-perturbative.
- Characterised by the Schwinger critical field.

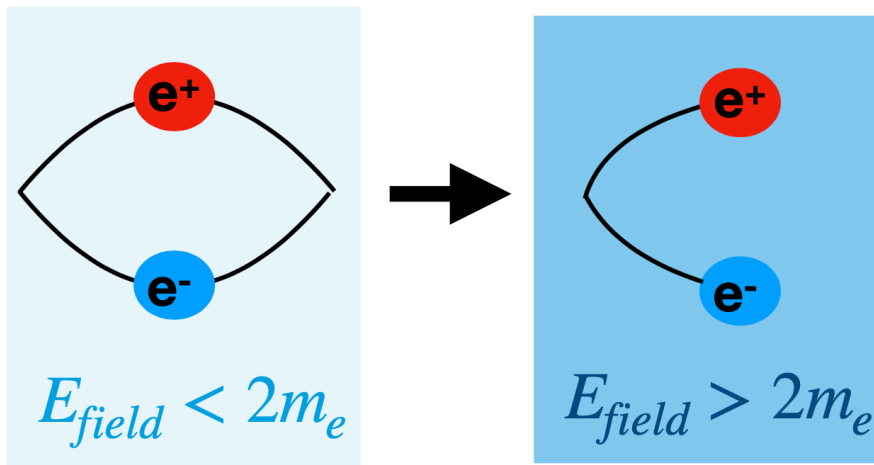


$$E_{\text{crit}} = \frac{mc^2}{e\lambda_C} = \frac{m^2c^3}{e\hbar}$$
$$= 1.3 \times 10^{16} \text{ V/cm}$$

- Fluctuating vacuum (time $> \lambda_C$) stimulated by high field to produce real pair creation.

Strong-field QED in the laboratory

- Existing fields, e.g. lasers, orders of magnitude too small compared to E_{crit} .
- But non-linear quantum effects observable with relativistic probes.
 - Fields $O(E_{crit})$ in particle rest frame

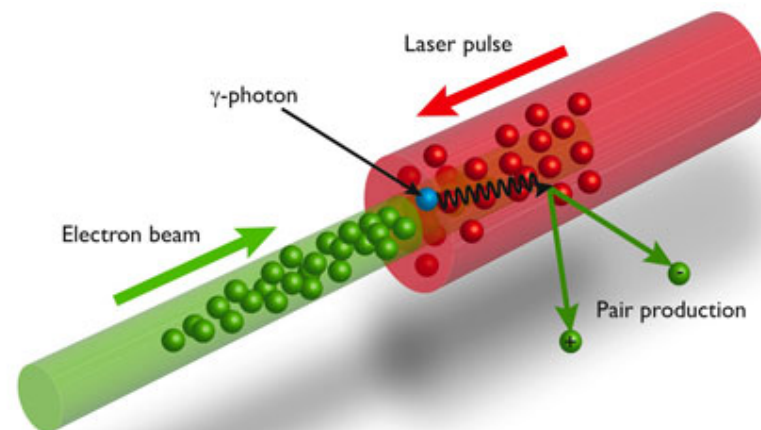

M. Marklund and J. Lundin,
Eur. Phys. J. D 55 (2009) 319

- In the laboratory, reach fields at Schwinger limit in the rest frame of highly relativistic particles.
 - Use multi-GeV electrons and multi-TW laser.

Strong-field QED parameters

- Intensity parameter:

$$\xi = \frac{m_e E_L}{\omega_L E_{\text{crit}}}$$

- Quantum parameters:

$$\chi_e = (1 + \cos \theta) \frac{E_e E_L}{m_e E_{\text{crit}}}$$

$$\chi_\gamma = (1 + \cos \theta) \frac{E_\gamma E_L}{m_e E_{\text{crit}}}$$

- Energy parameter:

$$\eta = \frac{\chi}{\xi} = (1 + \cos \theta) \frac{\omega_L E_{e/\gamma}}{m_e^2}$$

- Measure of coupling between probe and laser field (also square root of laser intensity).

- $\xi \geq 1$: non-perturbative regime

- Ratio of laser field and Schwinger critical field.

- $\chi \geq 1$: non-linear quantum effects become probable (e.g. pair production).

E_L : Laser field

E_{crit} : Schwinger critical field

ω_L : Laser frequency


θ : e/γ – laser crossing angle

$E_{e/\gamma}$: Probe electron/photon energy


Data handling

- Data handling should be “straightforward”: low frequency, modest rates.
 - Maximum data-taking frequency 10 Hz.
 - 1 Hz collision data, up to 9 Hz background.
 - Typical maximum rate per sub-detector $O(10 \text{ MB/s})$.
- Need ~ 1 PC per sub-detector.
- All data is kept — no physics trigger.
- Should be able to use known/off-the-shelf solutions for control and synchronisation.
- Should be able to use/adapt existing software for data acquisition.

LUXE status and planning

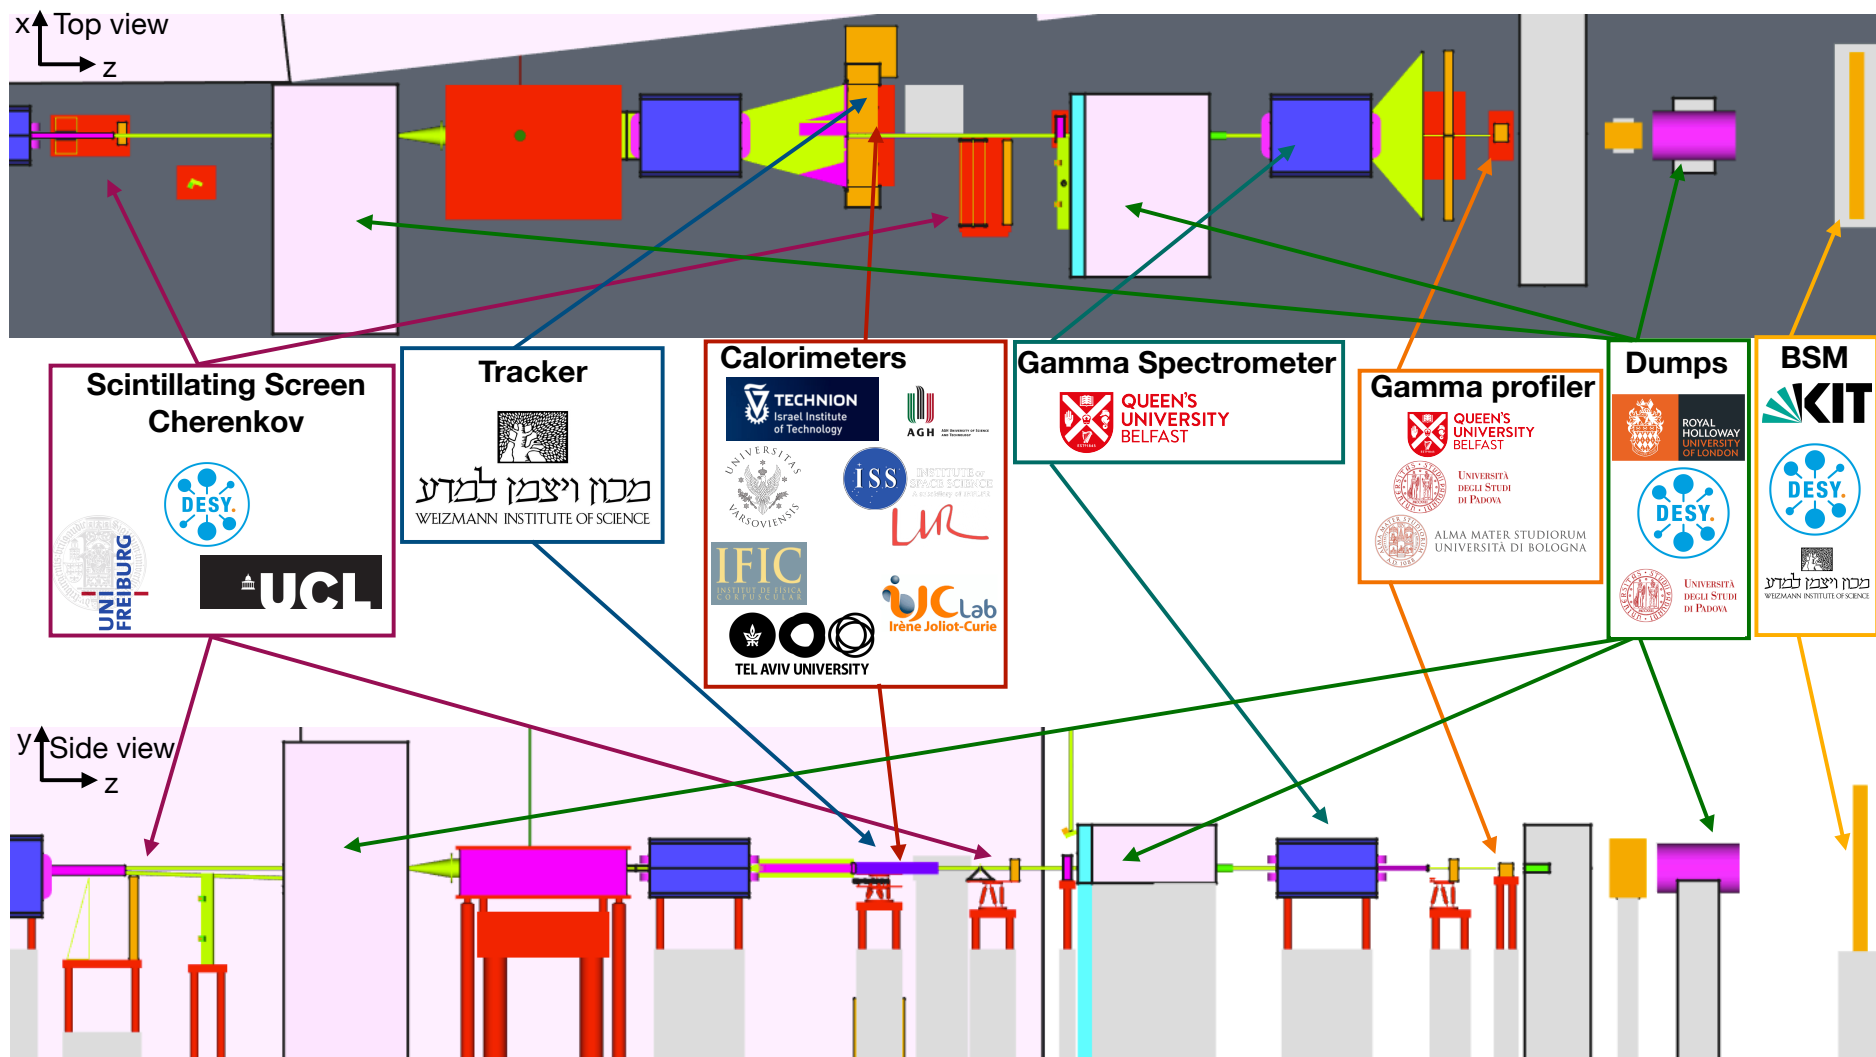

Laser diagnostics

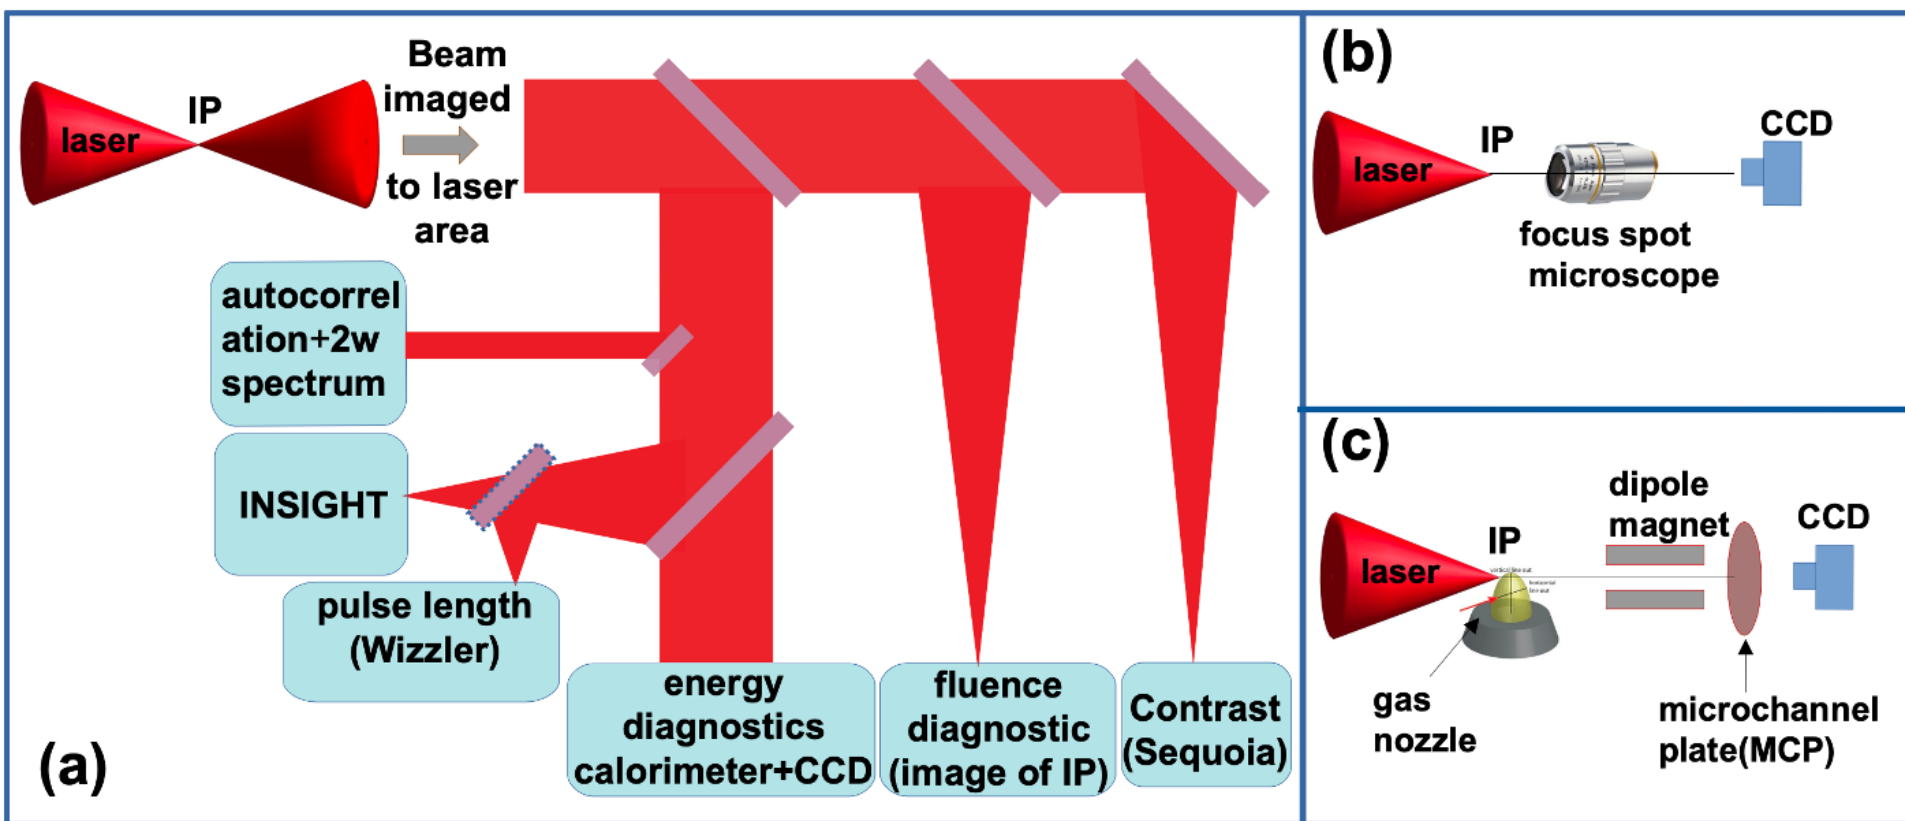


- Need to characterise energy, pulse length, spot size.
 - Diagnostics in IP chamber and in laser clean room.
- Uncertainty on laser intensity impacts physics results.
- Goal: < 5% uncertainty on laser intensity, 1% shot-to-shot uncertainty.

Overview of electron/positron detectors


- High-flux regions
 - Scintillation screens
 - Cherenkov detectors

High rate tolerance,
large dynamic range.

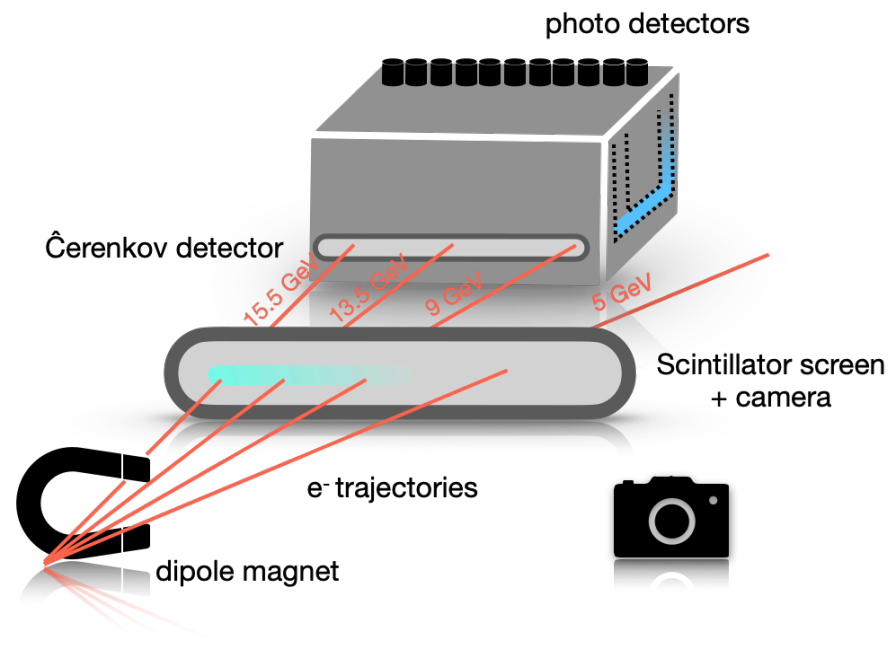



- Low-flux regions
 - Silicon pixel detectors
 - High granularity calorimeters

High signal efficiency,
high resolution.

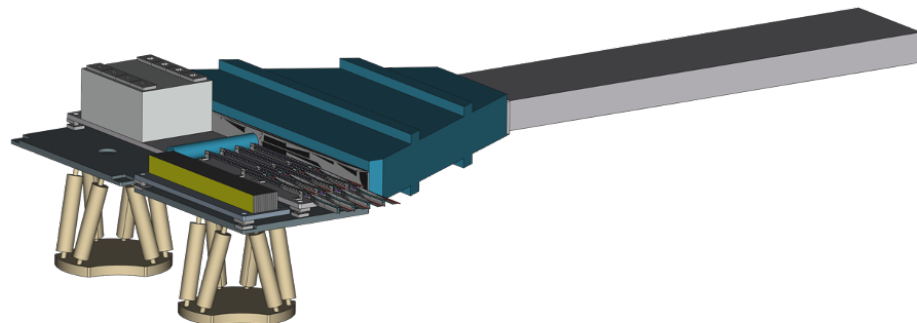




Positron detector — pixel tracker

- Pixel tracker:
 - Based on ALICE ALPIDE pixel chips.
 - Pixel size $27 \times 29 \mu\text{m}^2$ with position resolution of $\sim 5 \mu\text{m}$.
- Consists of 4 layers each of which has 2 staves.
 - Each stave is $27 \times 1.5 \text{ cm}^2$ built from 9 ALPIDE chips, $3 \times 1.5 \text{ cm}^2$

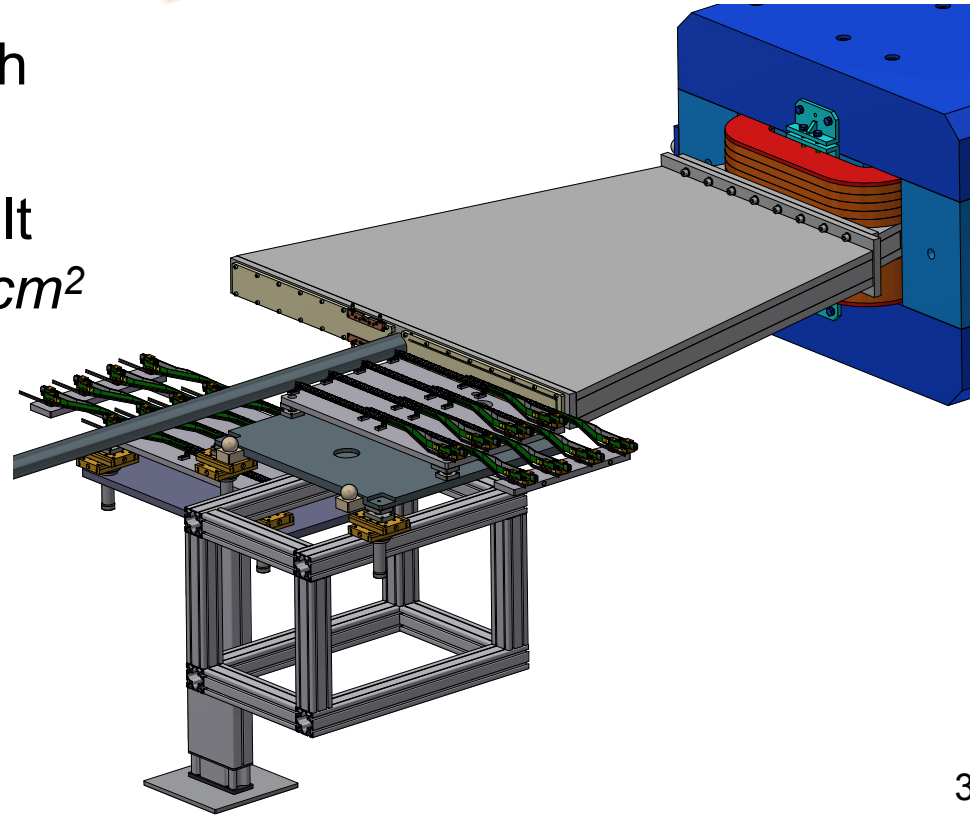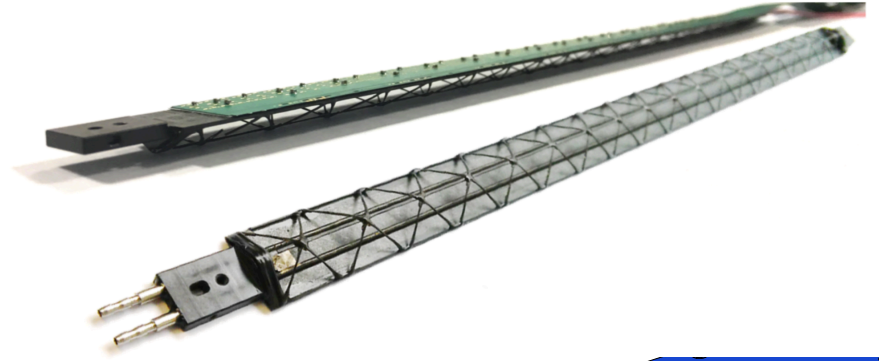



Pixel tracker performance

- Expected performance:
 - Energy resolution $< 1\%$.
 - Good tracking efficiency.
 - Good linearity for different signal track multiplicities.

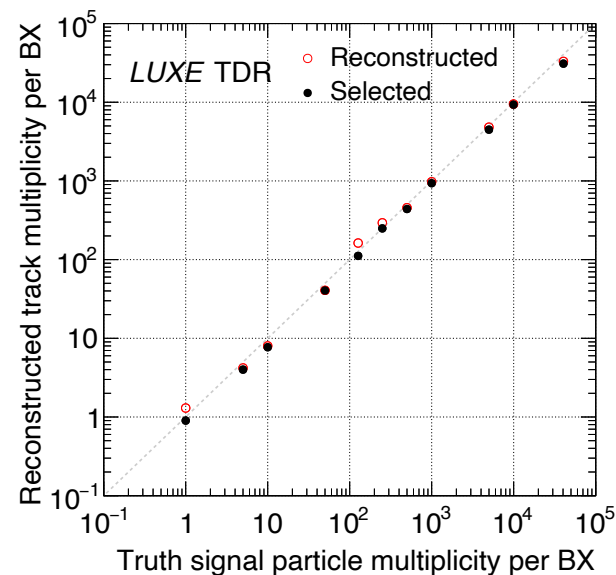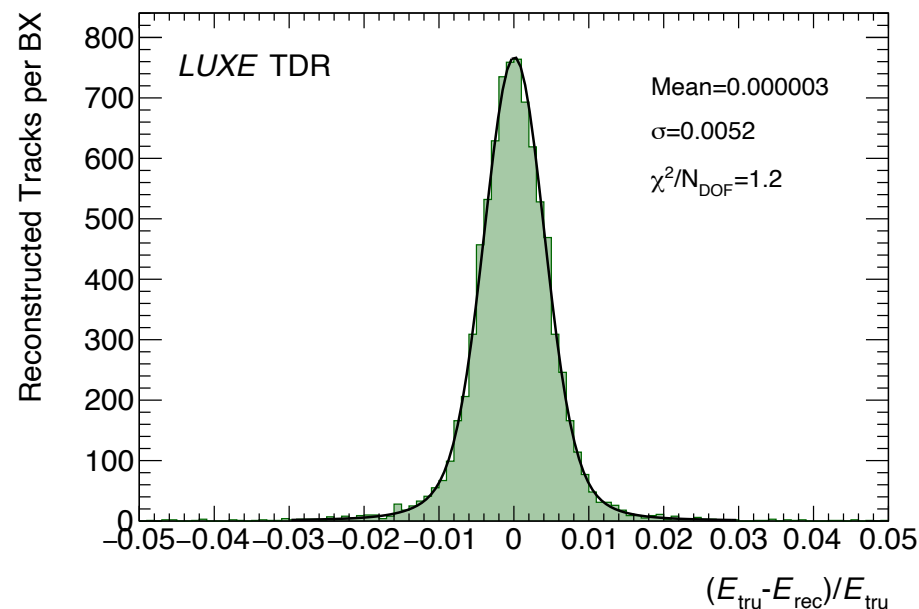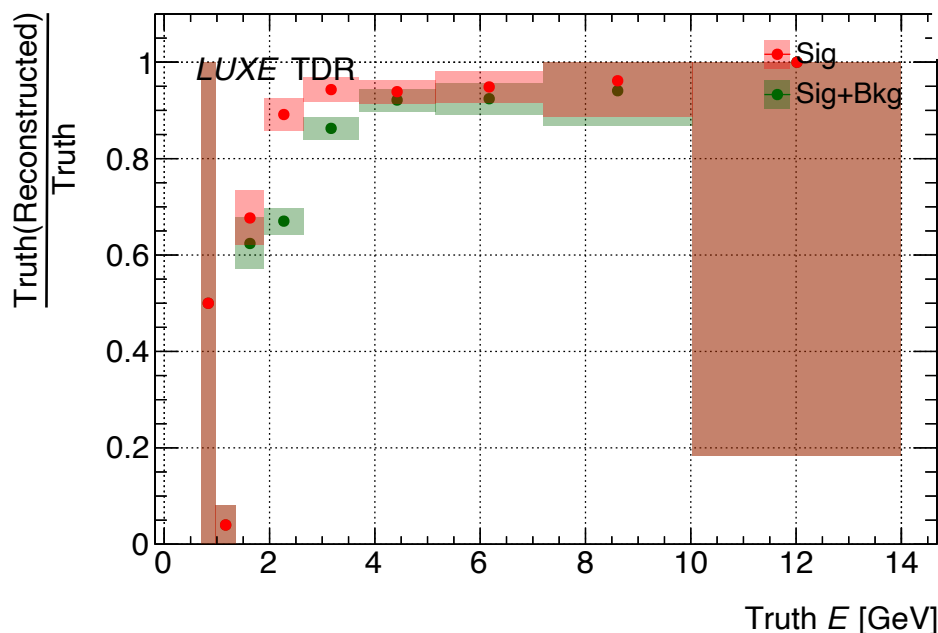


Positron detector — calorimeter

- High granularity, compact, sampling calorimeter.
 - Based on technology developed by (LC) FCAL collaboration.
 - Studies with 20 layers of 3.5 mm tungsten; baseline 10 layers @ 3.5 mm and 5 layers @ 7 mm.
 - Silicon sensors of $9 \times 9 \text{ cm}^2$ with pads $5.5 \times 5.5 \text{ mm}^2$; a complete detector plane is 6 adjacent sensors.
 - Energy resolution $\sigma/E = 20\%/(E/\text{GeV})^{1/2}$, position $\sim 750 \mu\text{m}$.

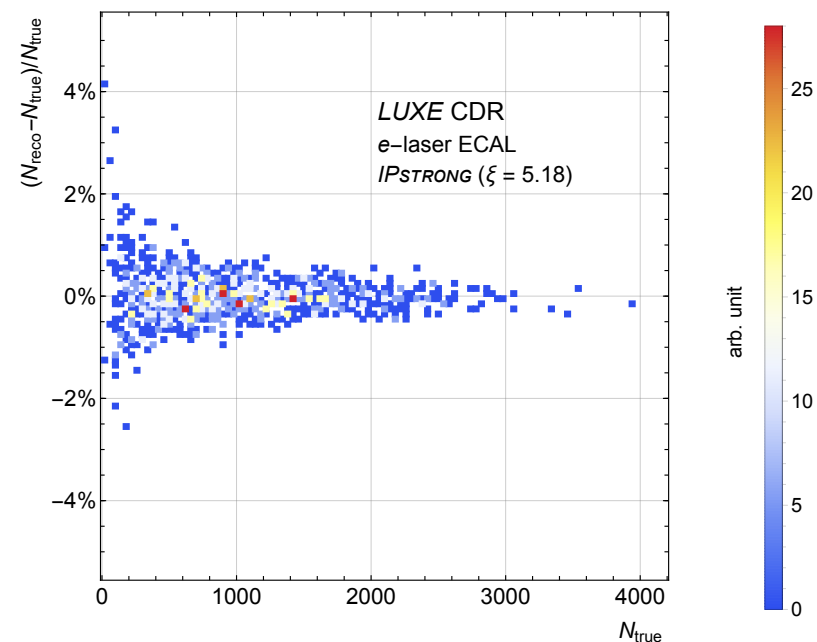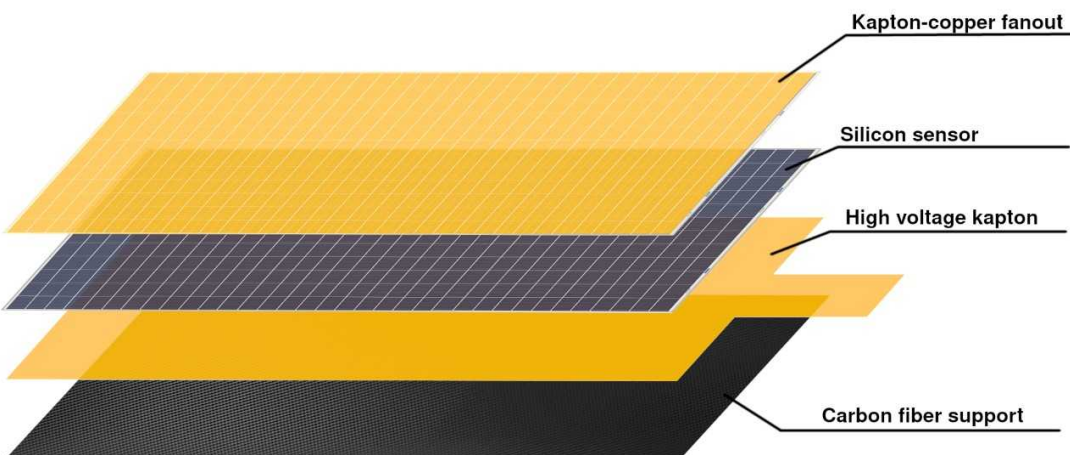




Positron detector — calorimeter

- High granularity, compact, sampling calorimeter.
 - Based on technology developed by (LC) FCAL collaboration.
 - Studies with 20 layers of 3.5 mm tungsten; baseline 10 layers @ 3.5 mm and 5 layers @ 7 mm.
 - Read out by FLAME ASIC (developed for FCAL).
 - Silicon sensors of $9 \times 9 \text{ cm}^2$ with pads $5.5 \times 5.5 \text{ mm}^2$.
 - A complete detector plane is 6 adjacent sensors.
 - Energy resolution of $\sigma/E = 20\%/(E / \text{GeV})^{1/2}$, position resolution $\sim 750 \mu\text{m}$.

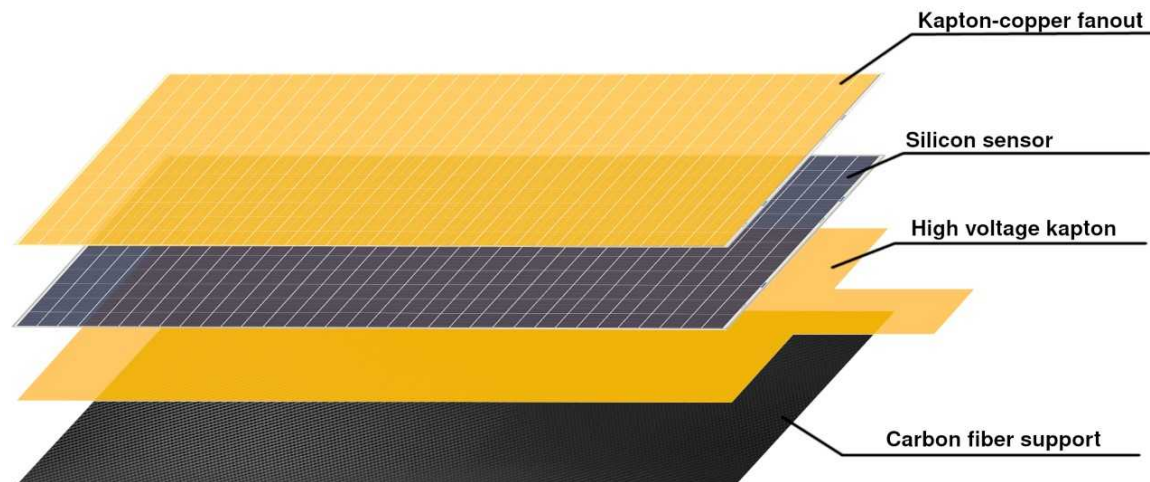


Calorimeter reconstruction

- Number of particles determined by comparing calorimetric energy with energy expected from cluster position.
- Good reconstruction for particle multiplicities of 1000.

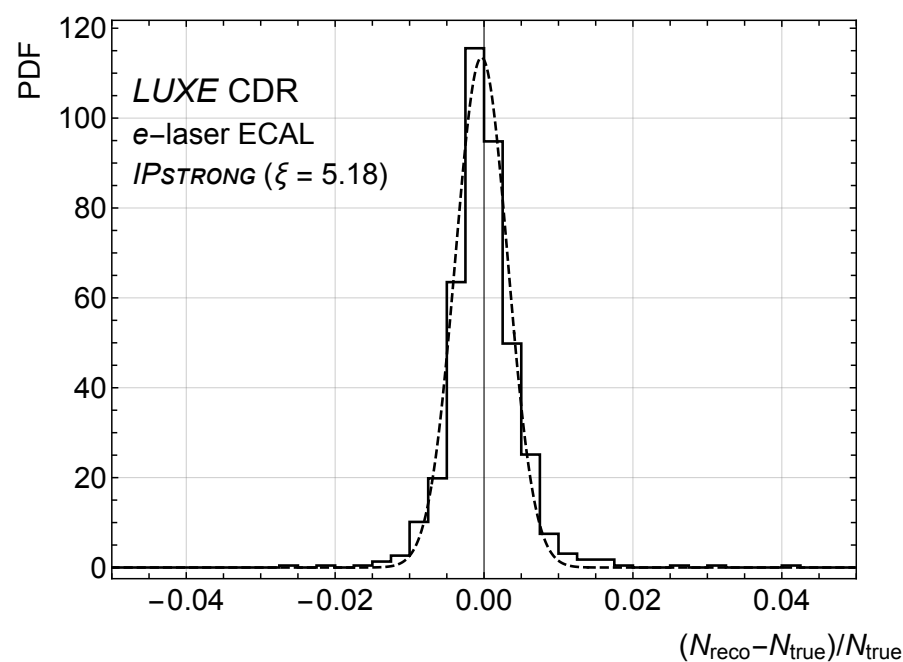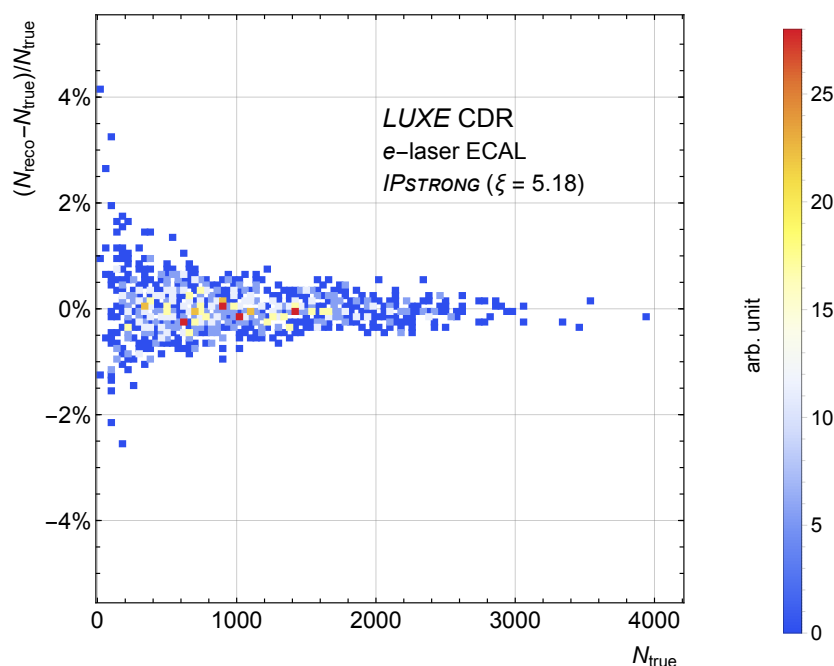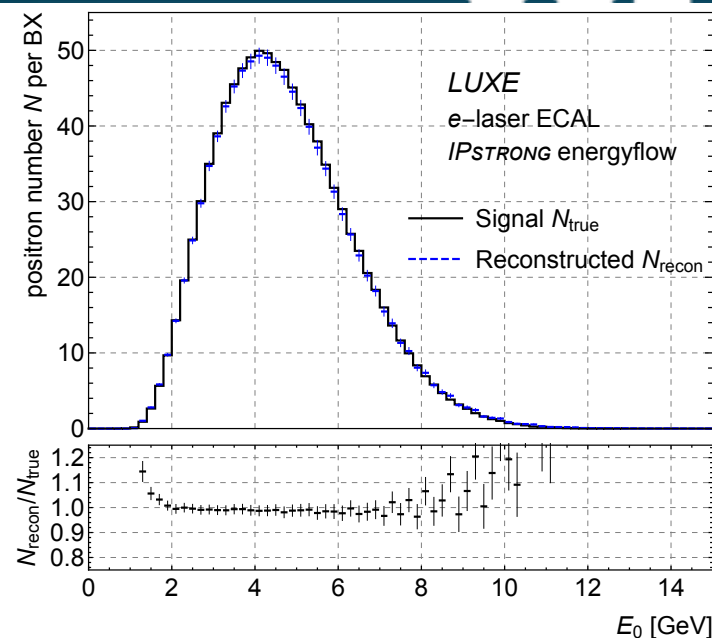



Electron calorimeter in γ -laser collisions

- To measure electrons in γ -laser collisions as rate is much lower.
- Use a silicon-tungsten electromagnetic calorimeter based on developments from CALICE collaboration.
 - Reference design for ILC concept.
 - 7 tungsten plates of 2.8 mm and 8 of 4.2 mm thickness.
 - Sensors are the same structure as other calorimeter
 - Pads directly connected to SKIROC2a ASIC.

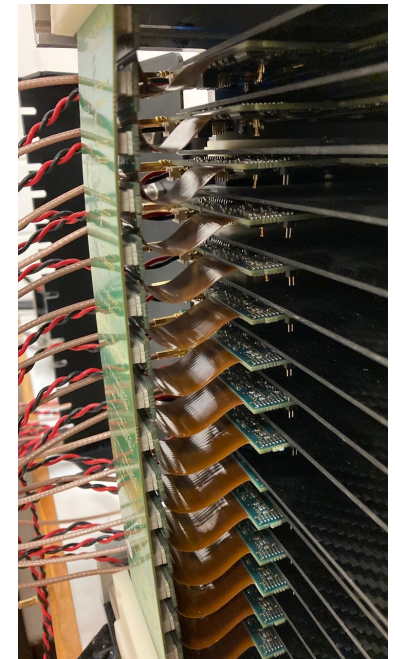

High-rate electron detector — scintillation screen


- A scintillation screen and camera (with filter) is inexpensive, flexible and simple with good position resolution.
- Scintillator: GadOx; camera: CMOS/CCD.
- As a spectrometer, position gives energy.

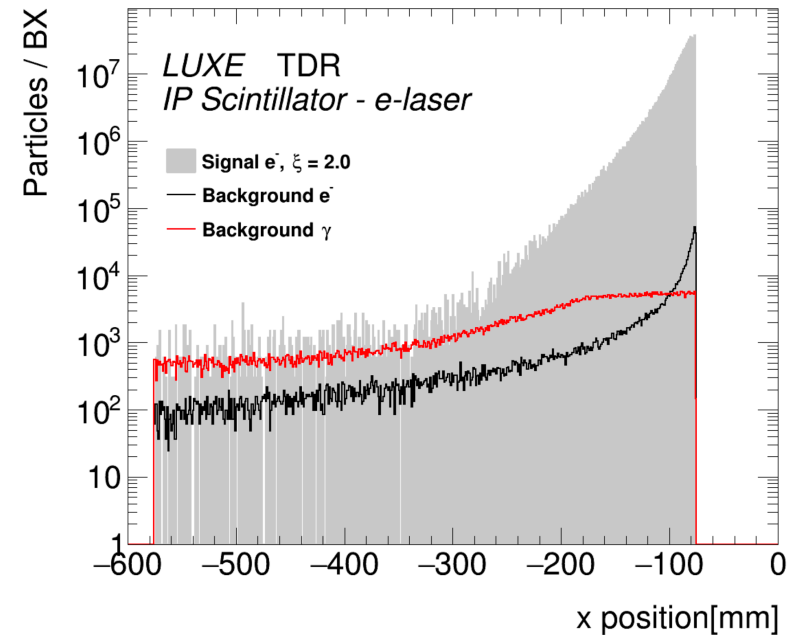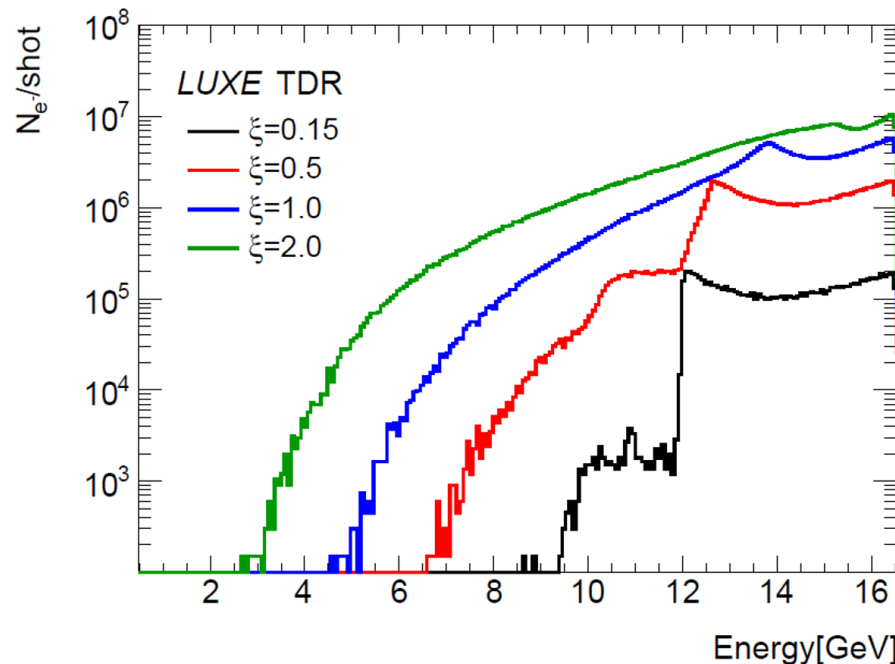


- Minimally affects electrons en route to Cherenkov detector.
- Good signal-to-background.
- Similar systems used in accelerators.

High-rate electron detector — Cherenkov

- Finely segmented ($\varnothing = 4\text{ mm}$) air-filled channel (reflective tubes as light guides).
 - Charged particles create Cherenkov light.
- Air: low refractive index
 - Reduce light yield.
 - Suppress backgrounds (Cherenkov threshold 20 MeV).
- Beam tests and R&D ongoing.
- Also deploy at E320.

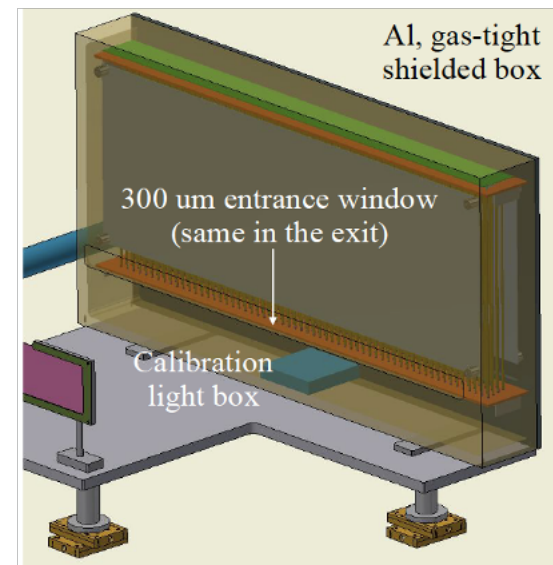


Straw prototype

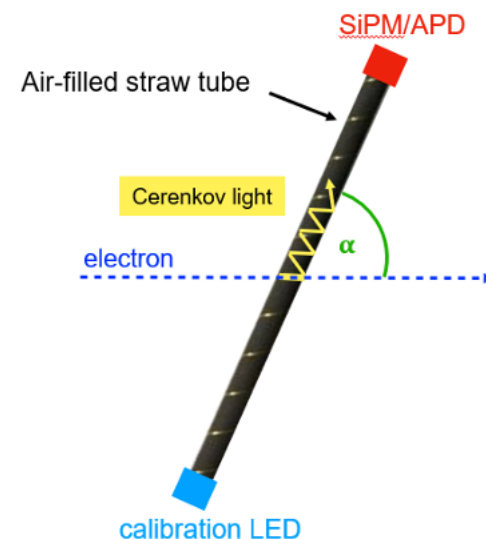


Overview of photon detectors

- Want to measure 10^9 photons summing up to TeV energies.
- Have three complementary systems:
 - Gamma-ray spectrometer where a fraction are converted to e^+e^- pairs.
 - Gamma-ray profiler which uses radiation-hard sapphire.
 - Gamma-flux monitor which relies on backscattering from photon dump.

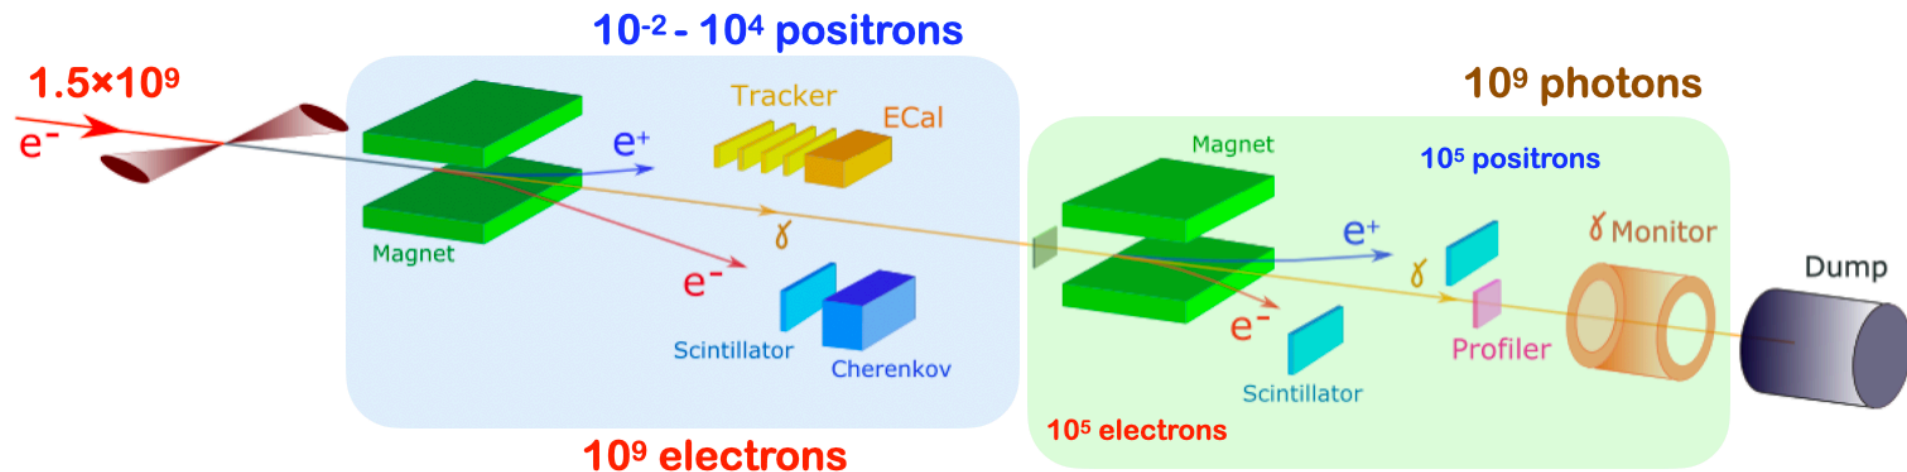




Gamma-ray spectrometer

- Aim: to measure photon spectrum.
 - Measure e^+e^- pairs after photons pass through target.
 - Spectrometer with scintillation screens and CCD cameras.
 - Good energy resolution ($\delta E/E < 2\%$).
 - Non-invasive (>99% photons propagate through).

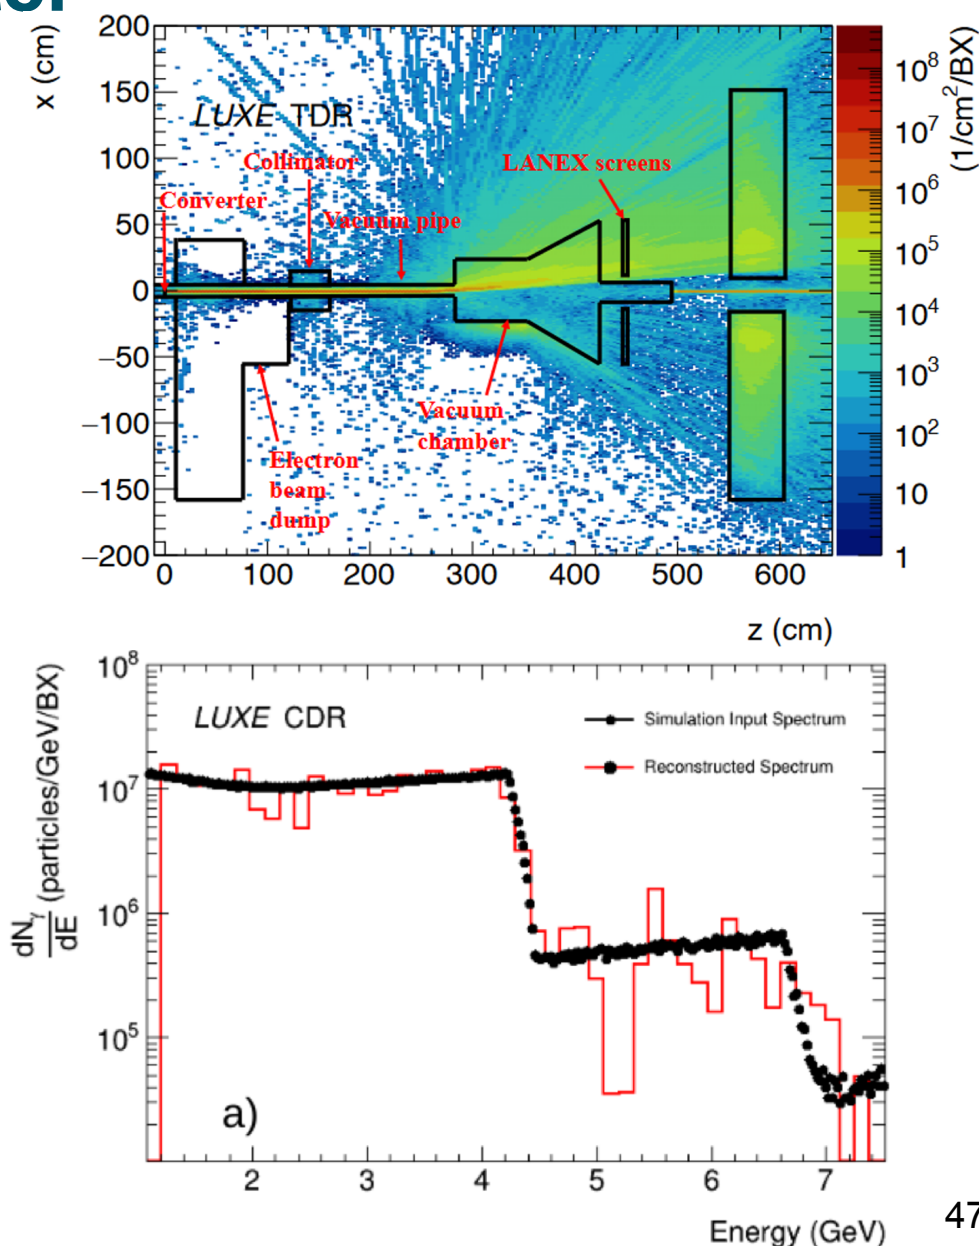




Gamma-ray profiler

- Two sapphire strip detectors movable with micron precision perpendicular to beam.
 - Photon beam location and shape
 - Precision measurement of laser intensity.
- Two detectors $2 \times 2 \text{ cm}^2$ ($100 \text{ }\mu\text{m}$ thick) with $100 \text{ }\mu\text{m}$ strip pitch should guarantee $<5\%$ precision in laser intensity.

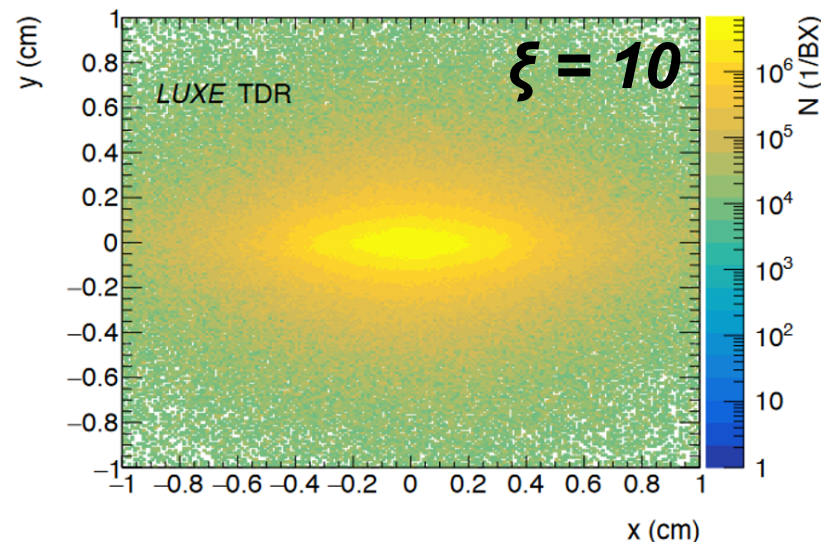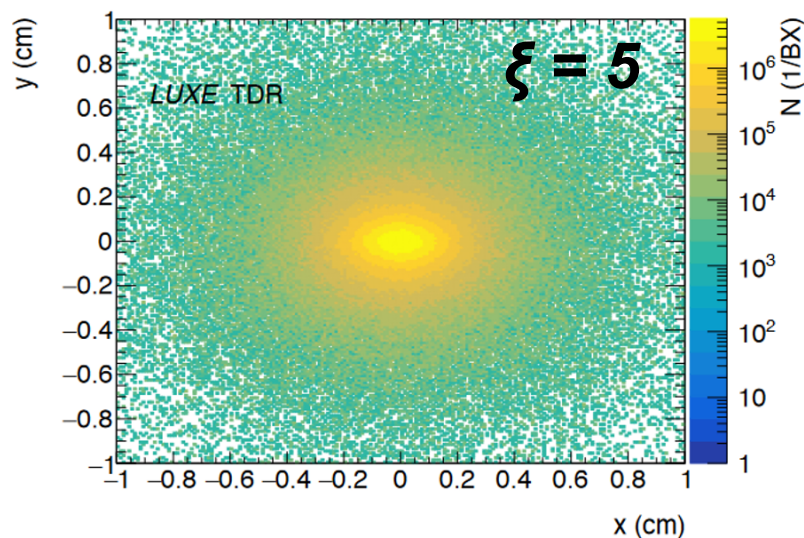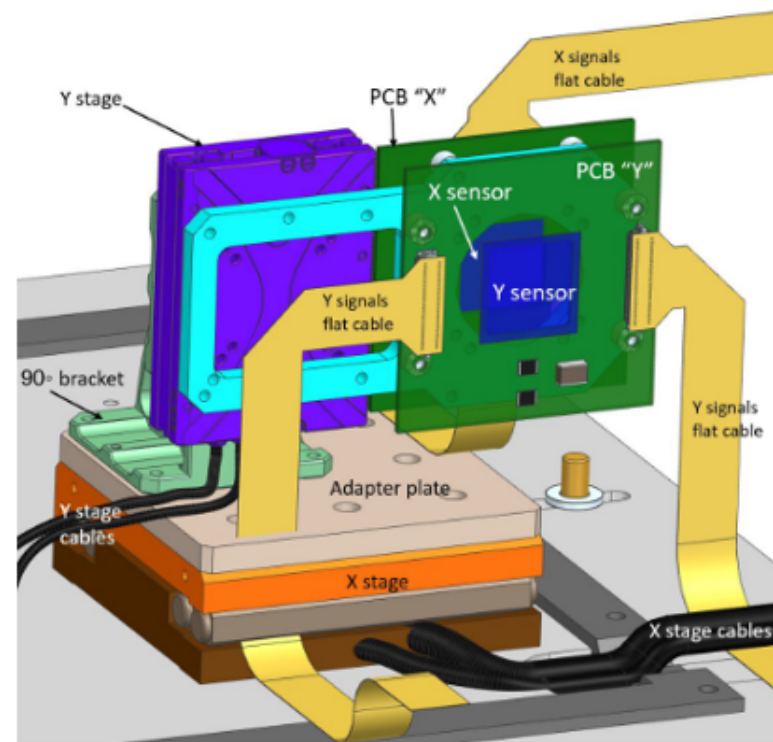

Gamma flux monitor

- Measure energy flow of particles back-scattered from photon beam dump.
- Gamma flux monitor:
 - Consists of lead glass blocks, $3.8 \times 3.8 \times 45 \text{ cm}^3$.
 - Beam tests ongoing at FLASHForward.

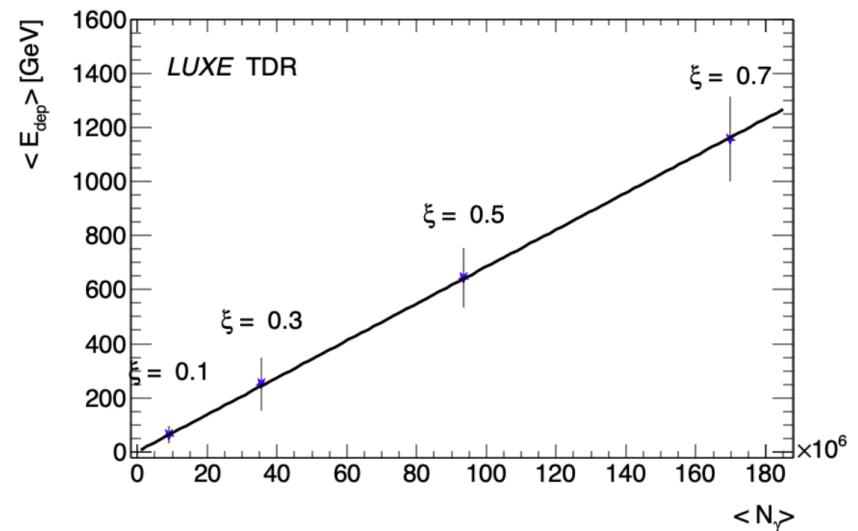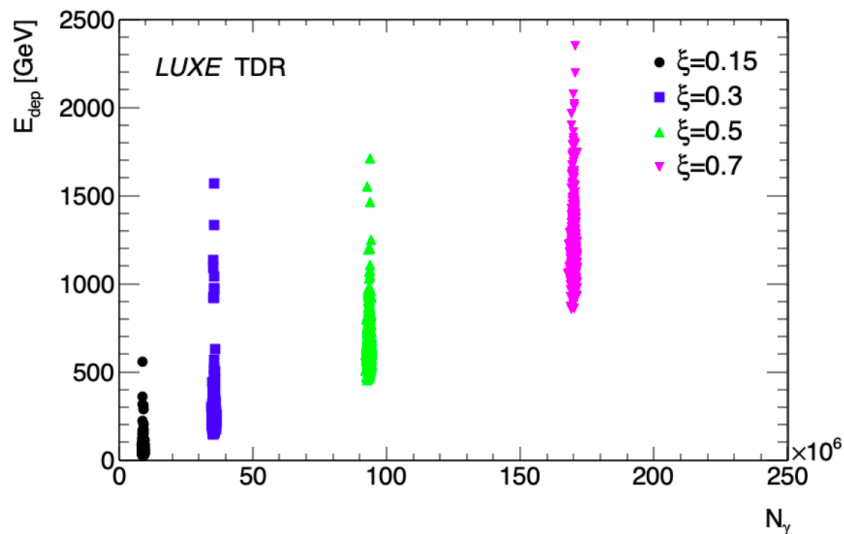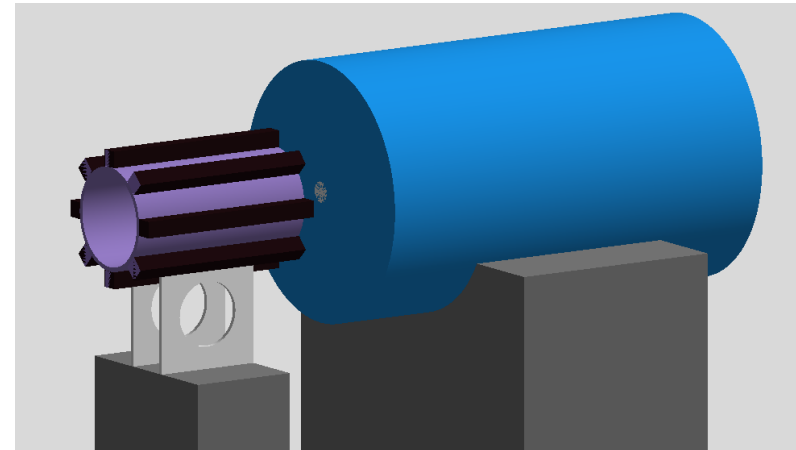

Systematic uncertainties — particle detection

- Low multiplicities (e^+e^- pair production):
 - Efficiencies for individual particles $< 2 - 3\%$ (cross-checks and in-situ calibration).
 - Linearity of response $< 2\%$ based on current tests.
 - Background: statistical uncertainty based on 9 Hz data, significant at low ξ .
- High multiplicities (Compton):
 - Linearity of response $< 2\%$ for Cherenkov (and scintillator) based on test beam and experience from other experiments.
 - Calibration $< 2\%$ based on test-beam calibration.
 - Background (for scintillators): constrain in situ.
- Energy scales (all):
 - Calibration/knowledge of magnetic field $\sim 1\%$.
 - Alignment of $< 50\text{ }\mu\text{m}$ results in $< 0.5\%$ uncertainty.