


Beam test with turn and tilt

Ganna Dolinska, Ievgen Korol, Hanno Perrey,
Daniel Pitzl, Simon Spannagel


Hamburg CMS Pixel Upgrade meeting, 8.2.2013

- turn sensor to study charge sharing between columns
 - incident angle similar to dip angle in CMS
- beam test this week
- first results

CMS: dip angle dependence of z resolution

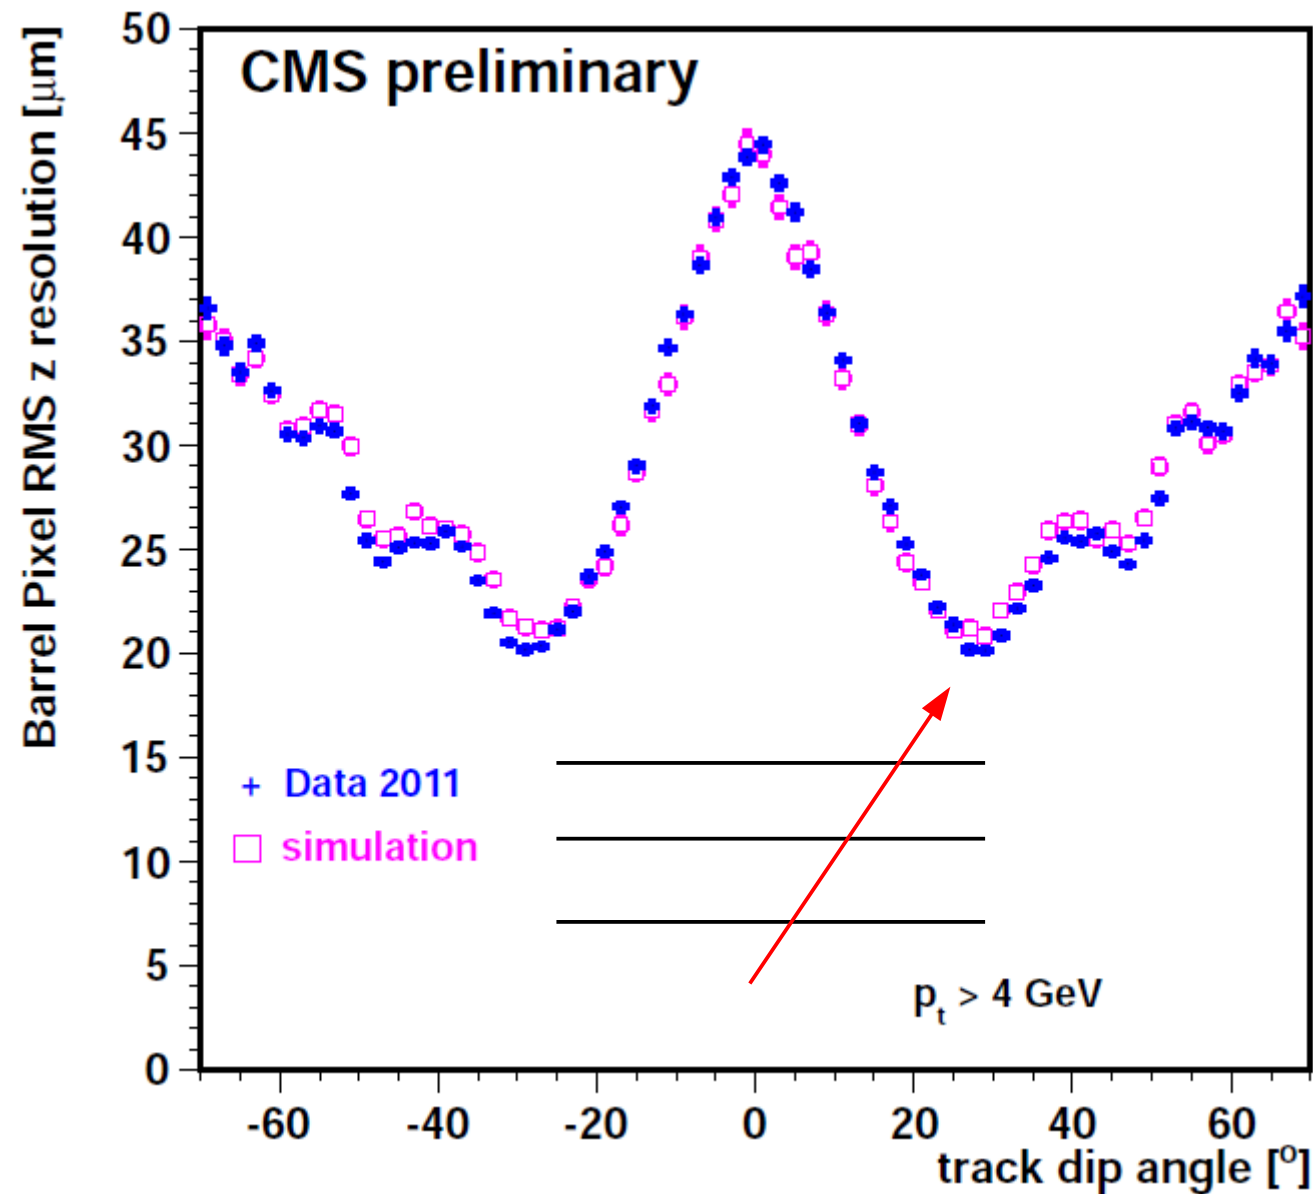

- dip angle:
 - $\lambda = \pi/2 - \theta$.
- z = column direction
- optimal resolution at $28^\circ = \text{atan}(150/285)$
 - sharing between neighboring pixels

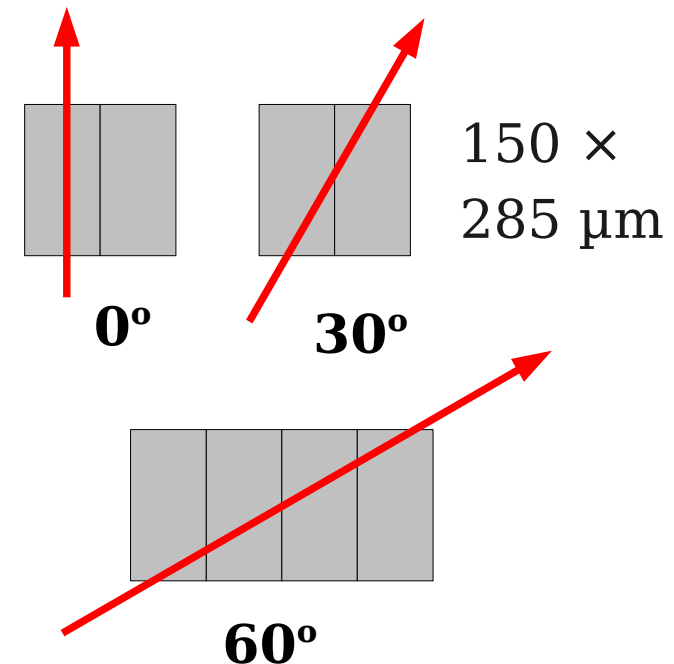

DUT with tilt and turn

**3 planes
downstream**

**common
scintillator
trigger**


**CMS Pixel
tilted 19°
turn 45°**

**CMS Pixel
timing
reference**


**3 planes upstream
 $3.3\ \mu\text{m}$ resolution**

**4.4 GeV
positrons
 $500\ \text{Hz}/\text{cm}^2$**

**extended support
thanks to Adam Zuber**

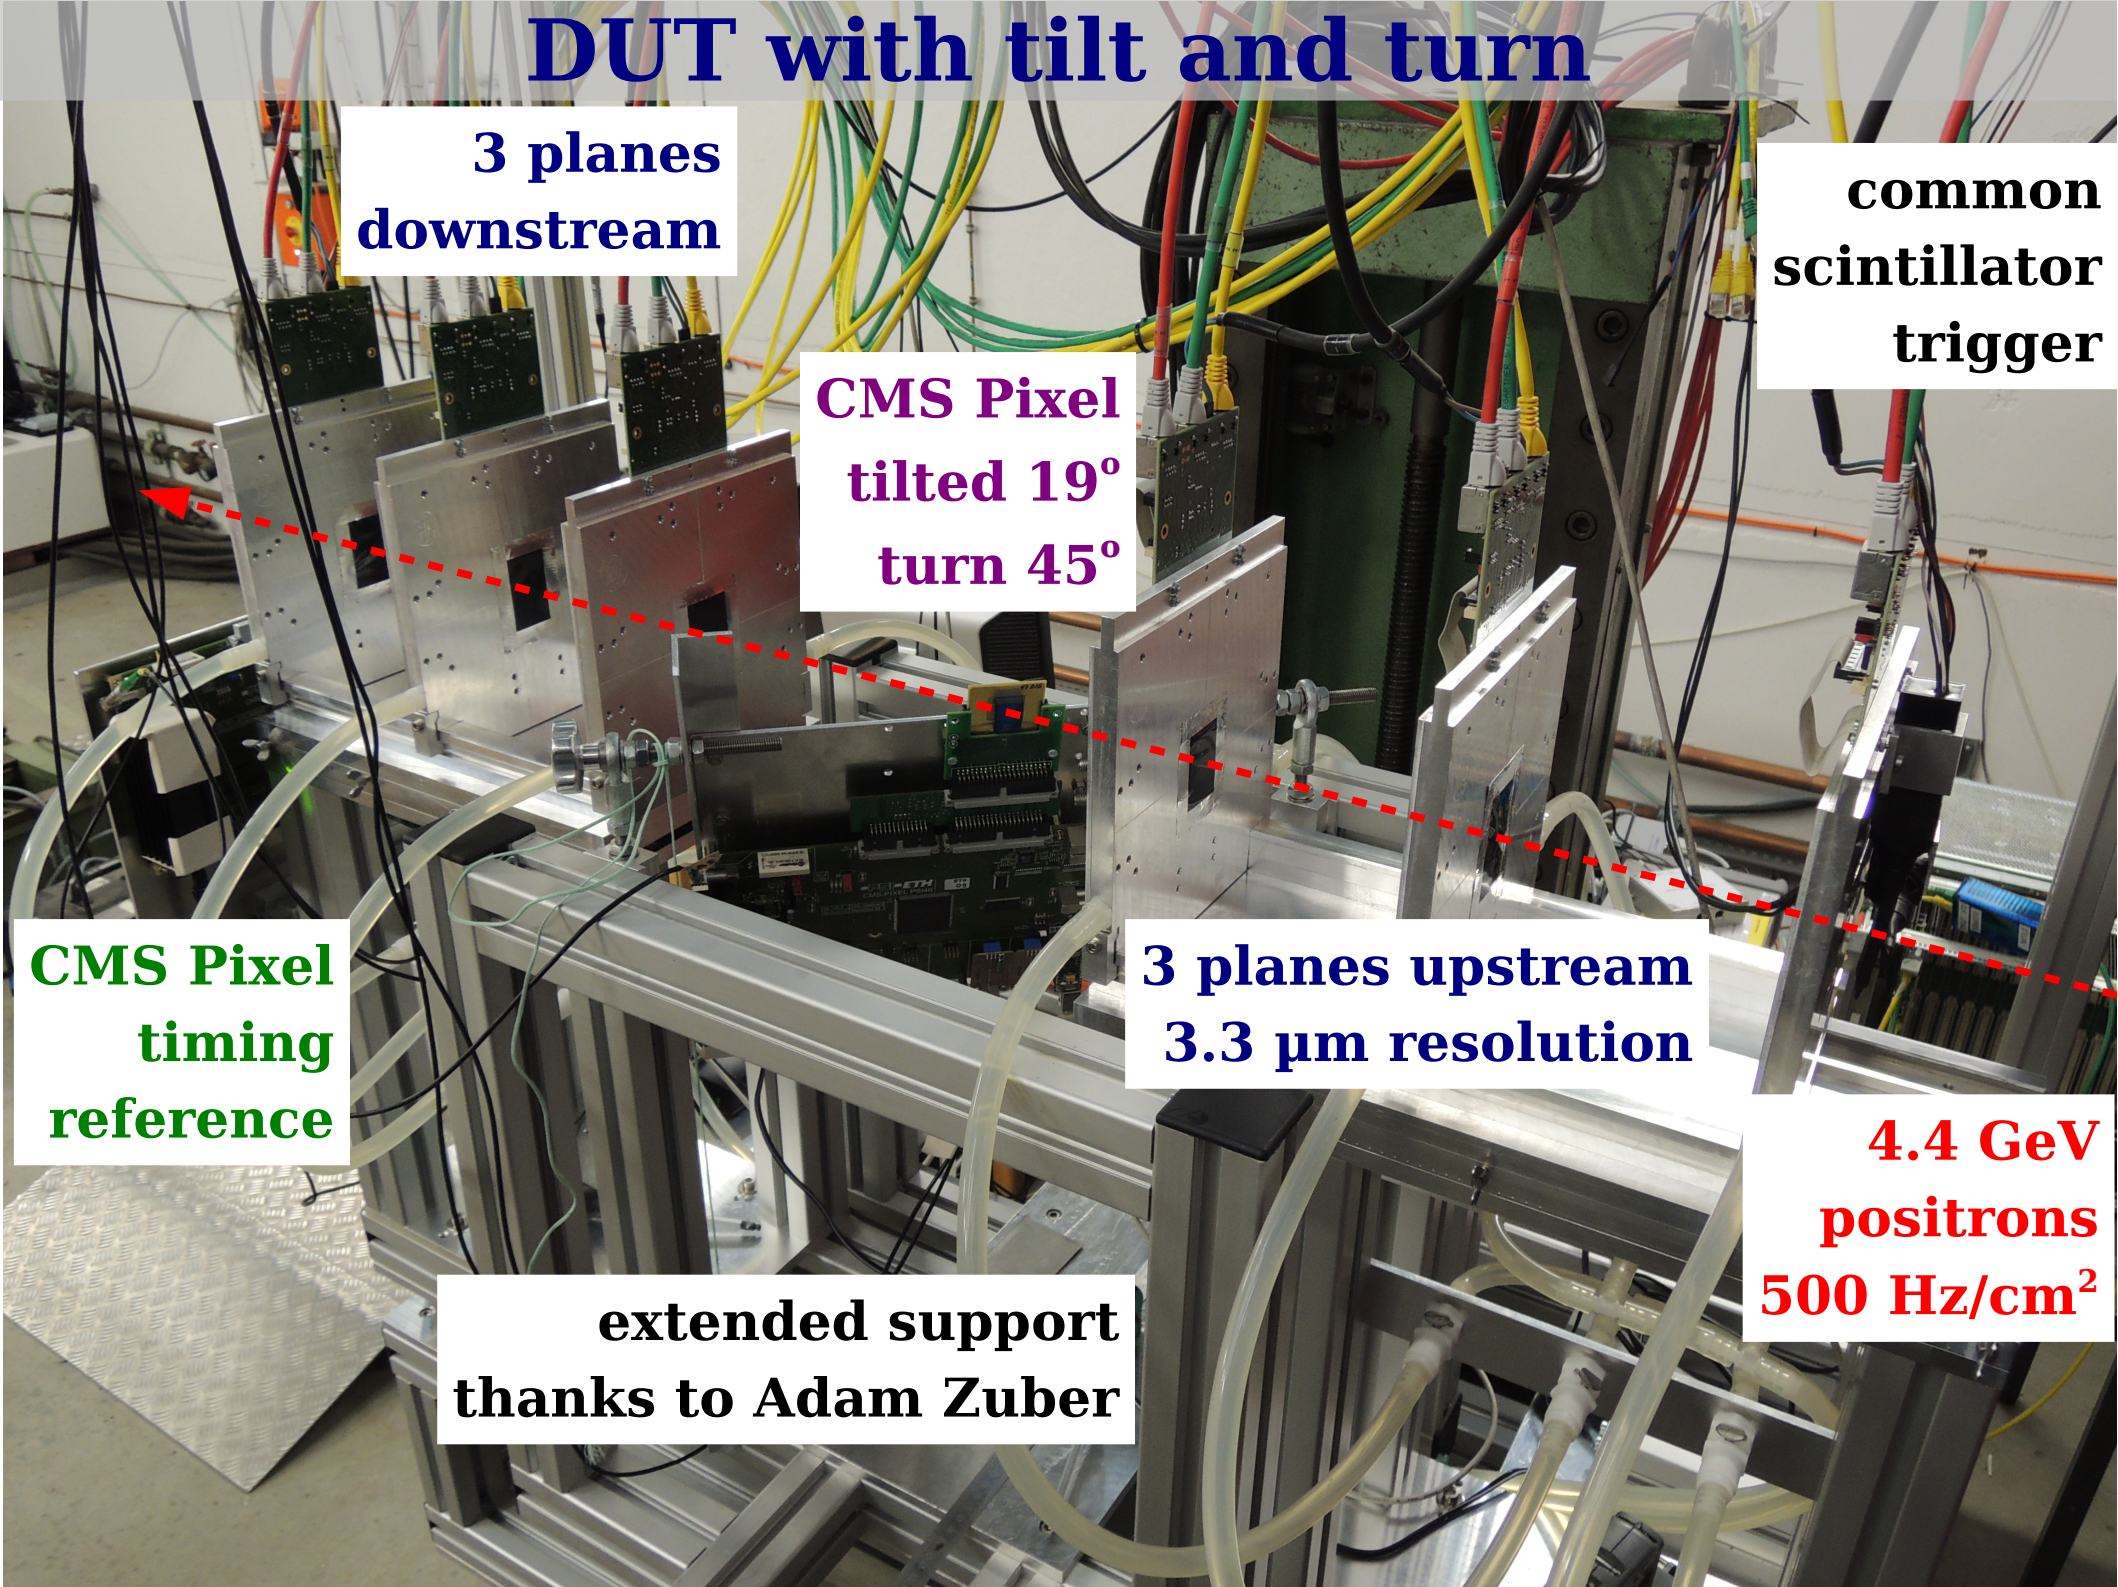


DUT with tilt and turn

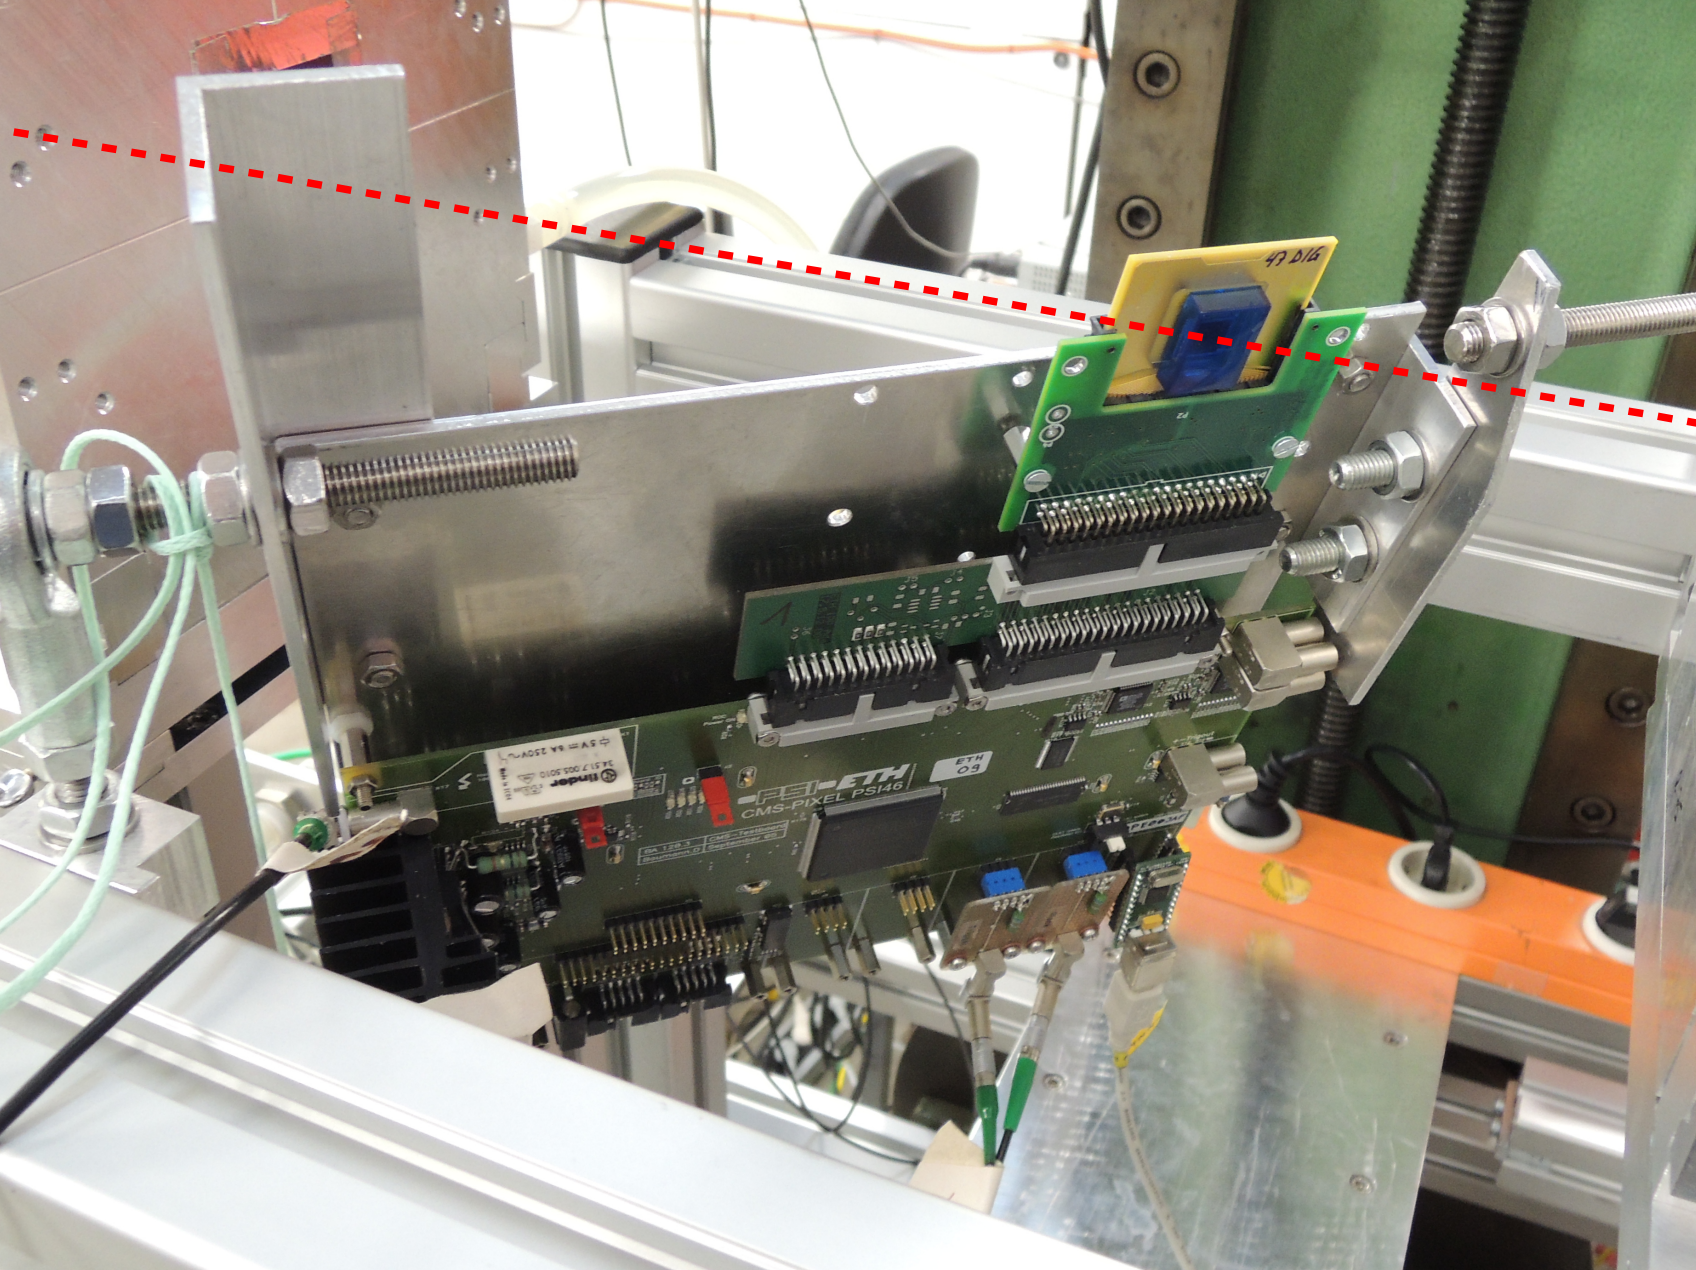

The image shows a Detector Under Test (DUT) mounted on a mechanical stage. The DUT is a green printed circuit board (PCB) populated with various electronic components, including a large black integrated circuit (IC) labeled 'CMS-PIXEL PS146'. The PCB is connected to a yellow cable and a blue cable. The assembly is mounted on a metal frame with a red dashed line indicating the tilt axis. The background shows a laboratory setting with a green wall and a black cable.

psi46dig pixel readout chip

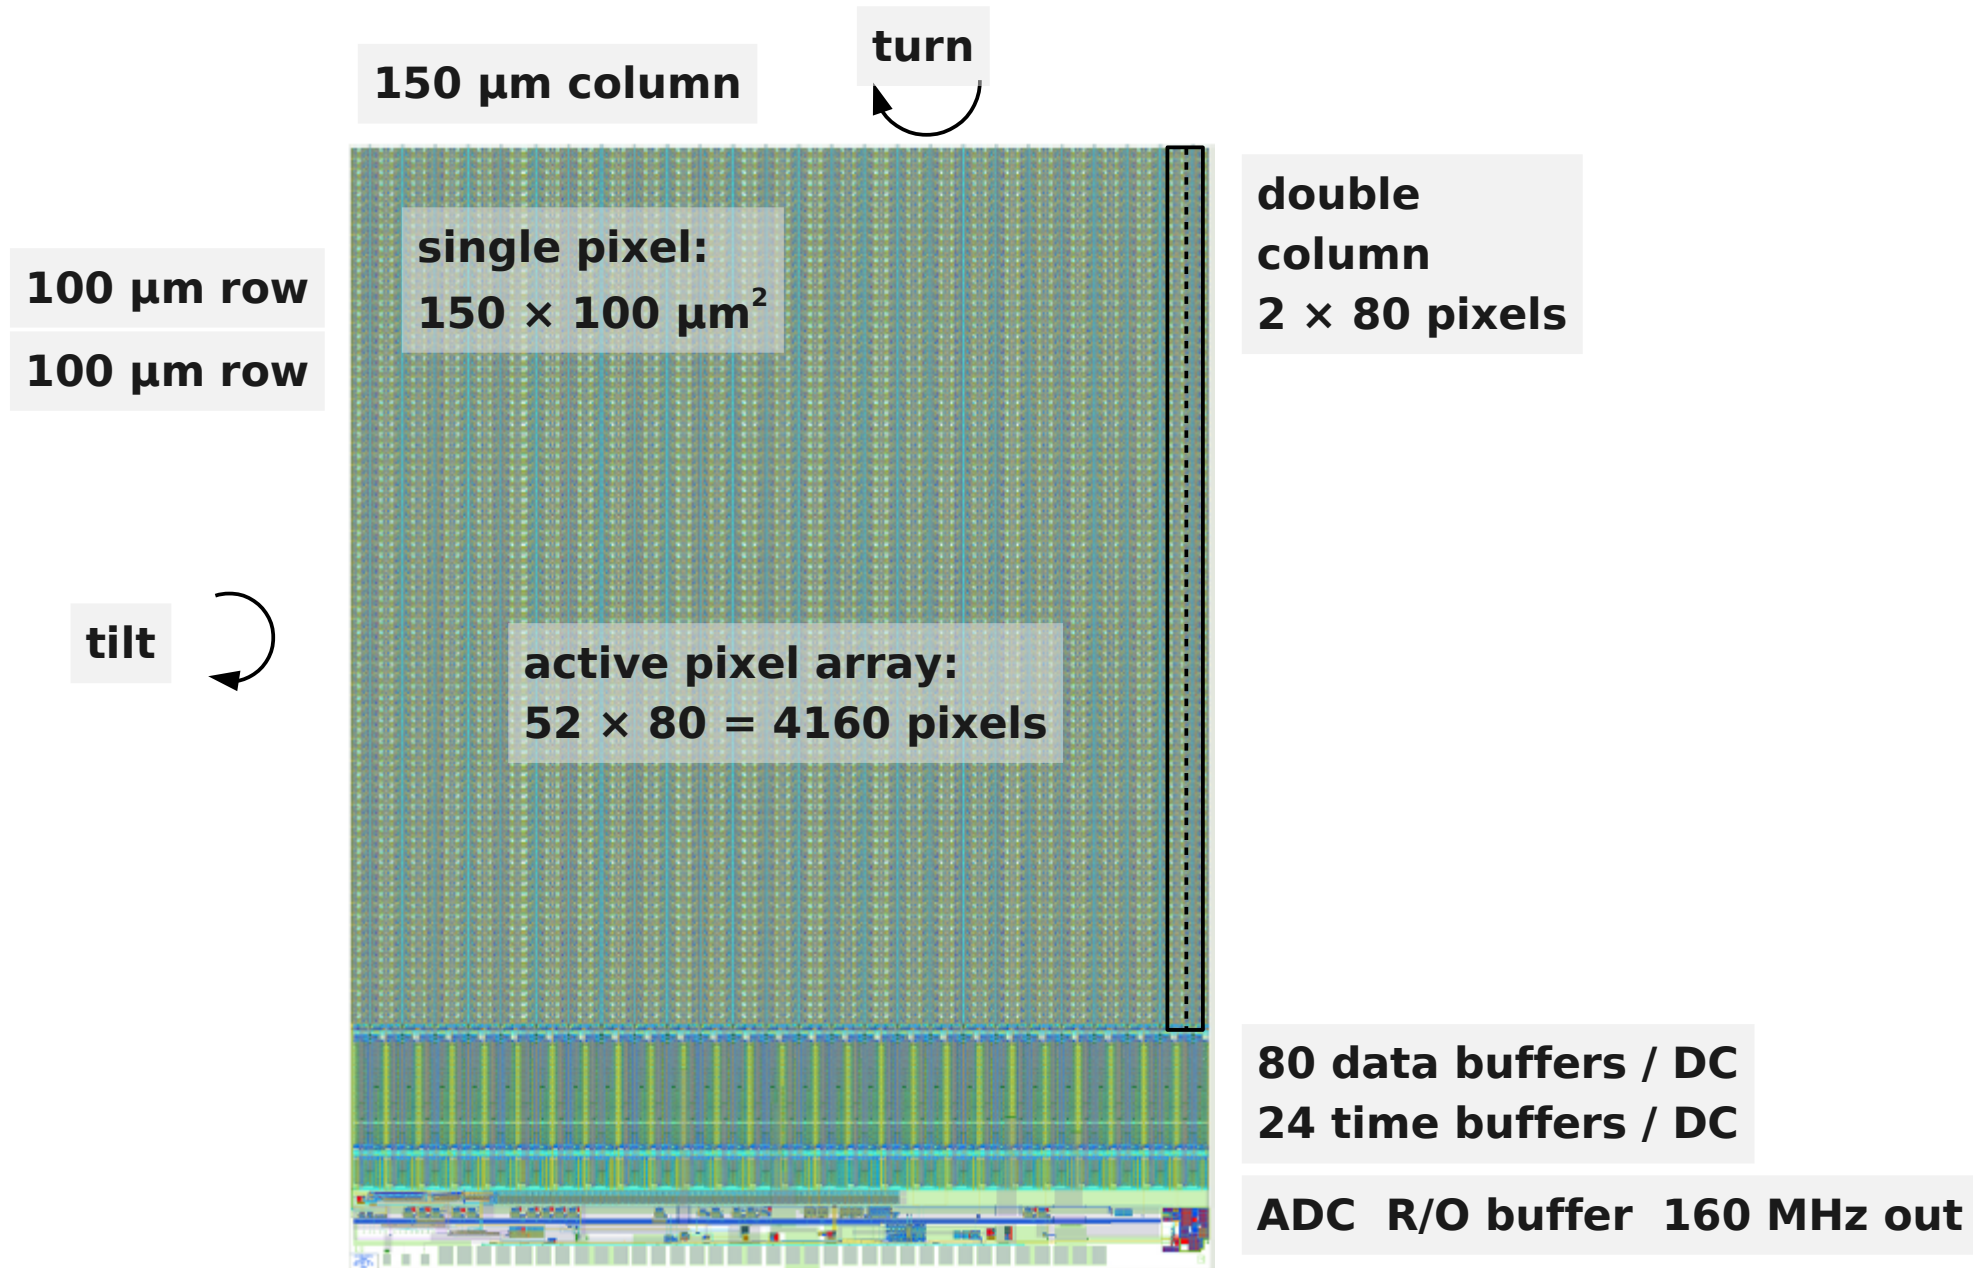


Program


- single chip module with psi46dig chip 47
 - bump and wire bonded at PSI
 - thresholds trimmed to 25, 30, 35, 40, 50, 60, 80 DACs (50 e)
 - bias -150 V
 - fixed tilt angle 19° (like Lorentz angle in CMS)
 - 4.4 GeV, typically 500 Hz telescope trigger rate with $9E9$ e⁻ in DESY
- Vary turn angle:
 - 27° , 18° , 45° , 36° done. 9° and 0° today.
 - take threshold scan at each angle
 - two good 5 min runs per point

columns per cluster

no turn

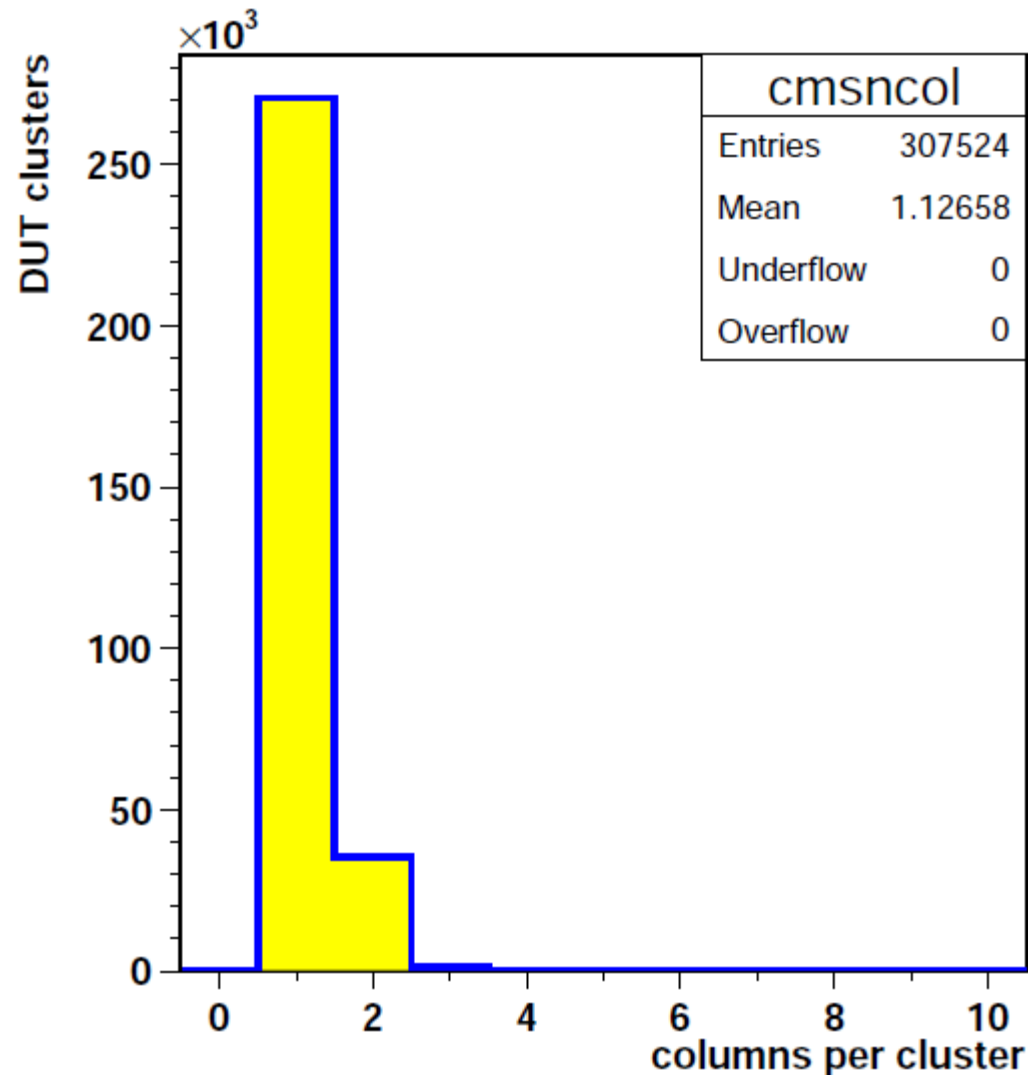


26° turn

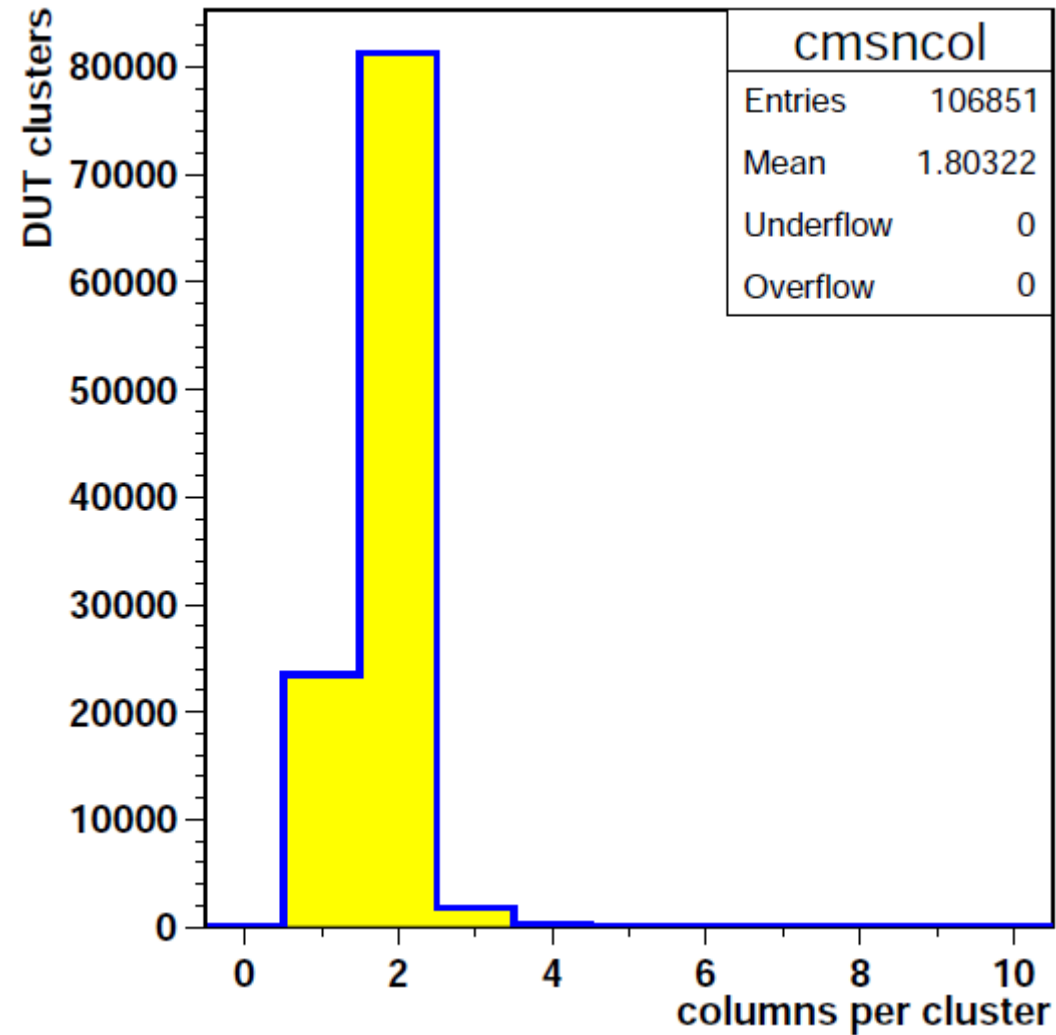


column resolution with turn angle

dig chip47, trim 30, run 6208, 4.4 GeV, 27° turn

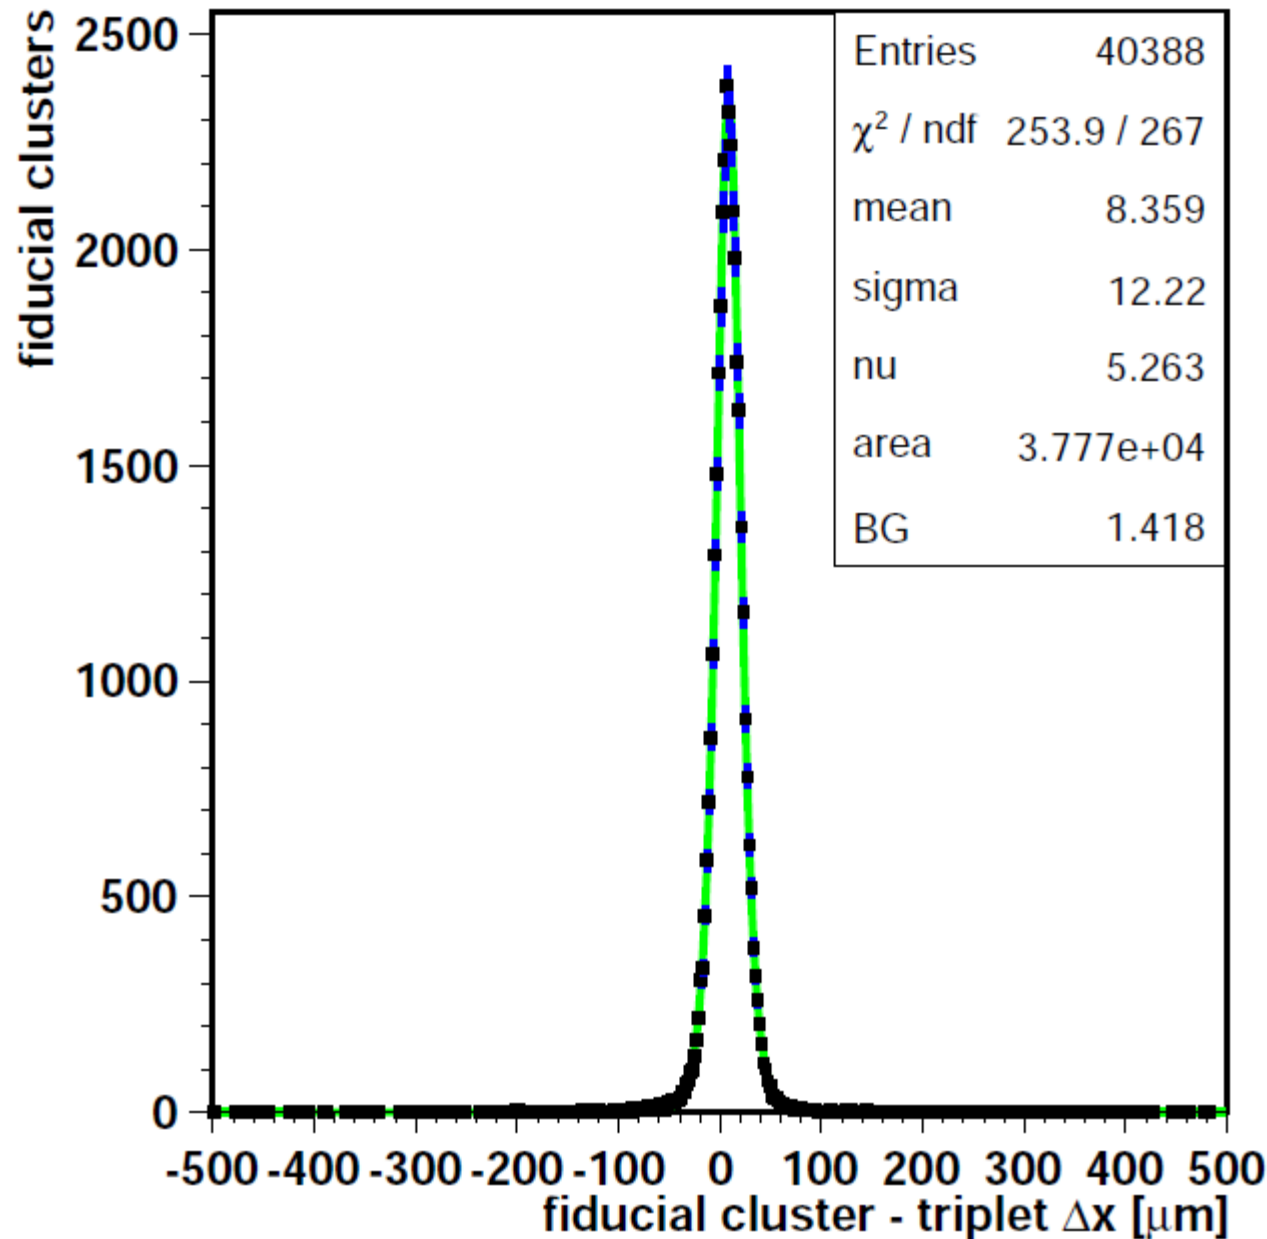


top view:

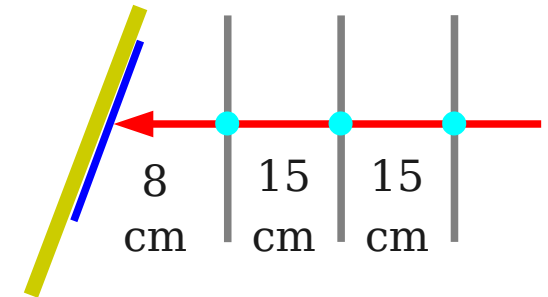


- Horizontal = columns
 - pixel width 150 μm
- turn angle:
 - charge sharing
 - residuals have Gaussian distribution
 - sigma = 12.2 μm
 - subtract telescope 7 μm
 - $\sigma_{\text{column}} = 10 \mu\text{m}$

column resolution at 27°


trim 30 (1.5 ke), run 6208

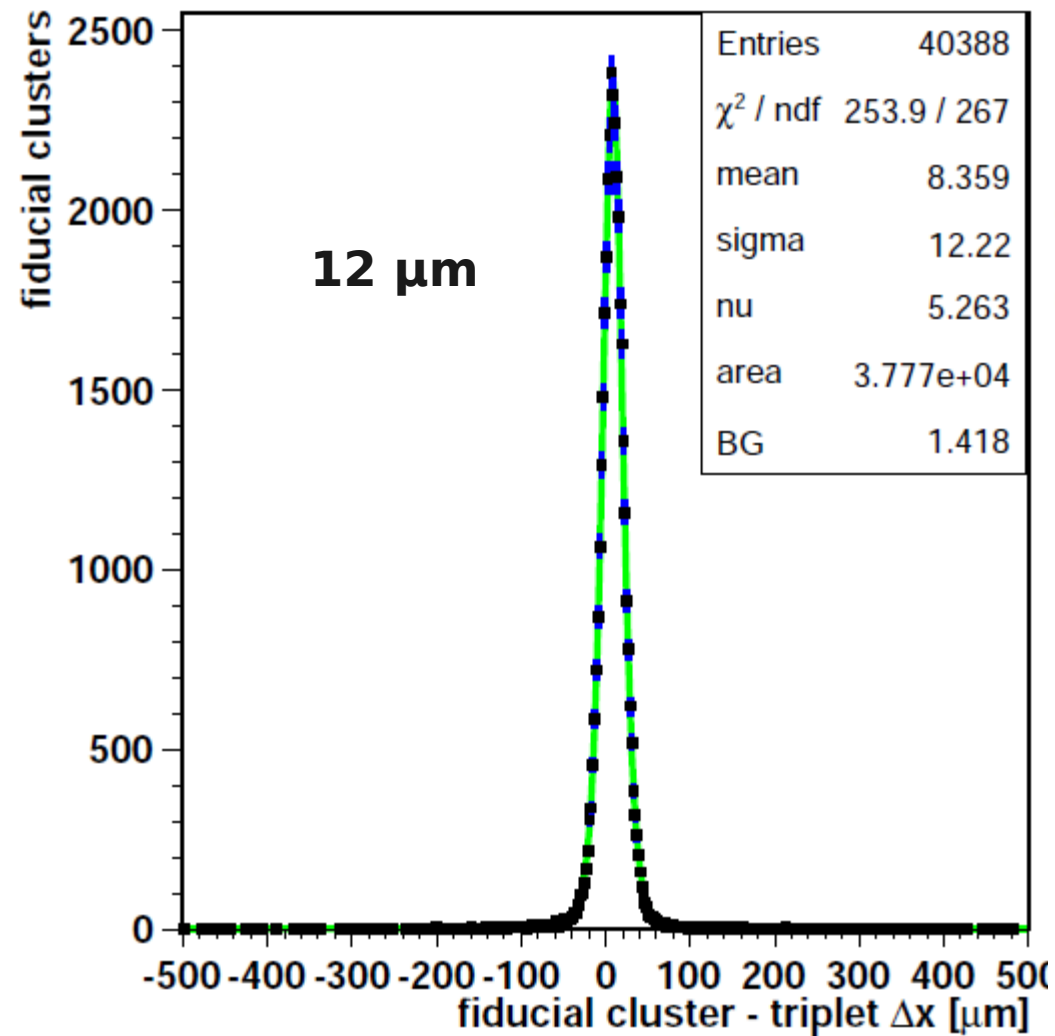

trim 80 (4 ke), run 6200

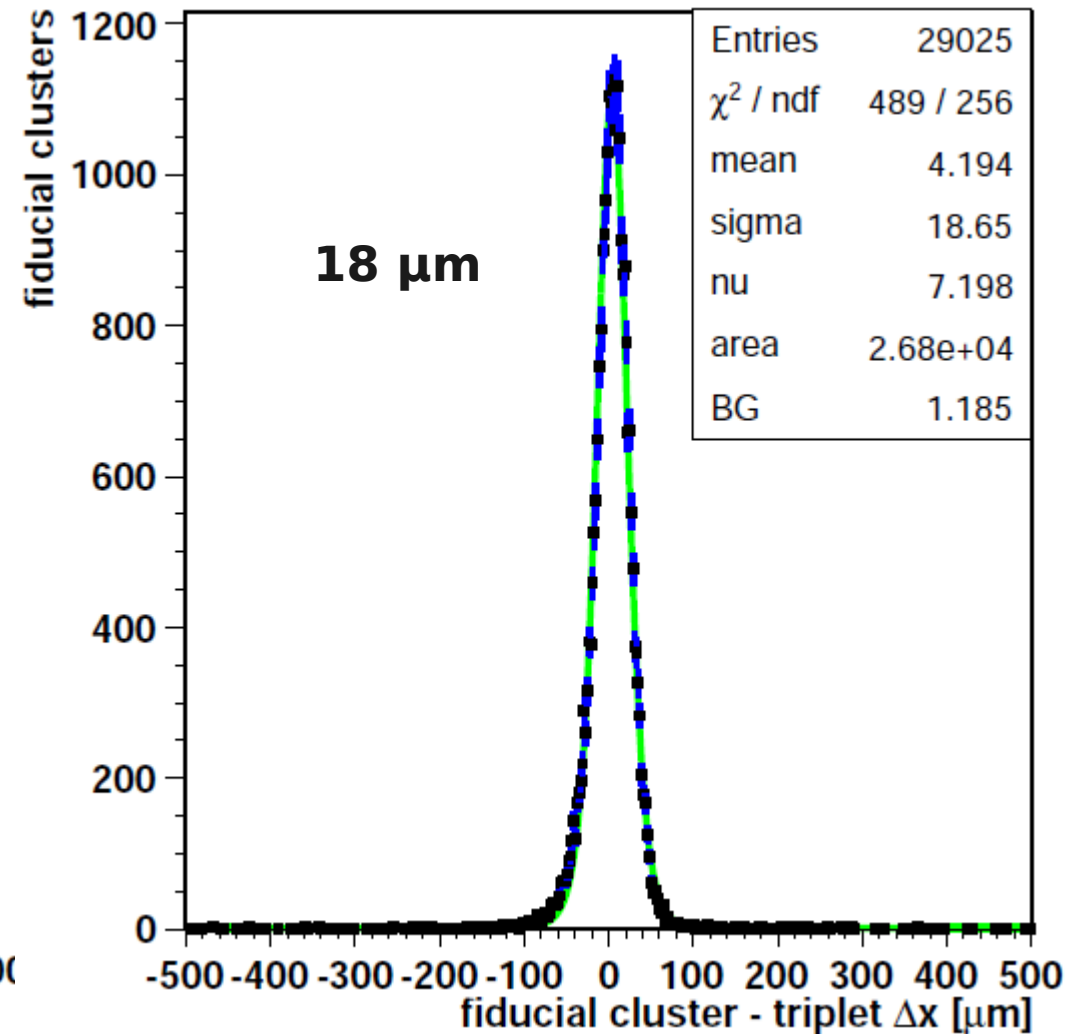

beam test vs CMS

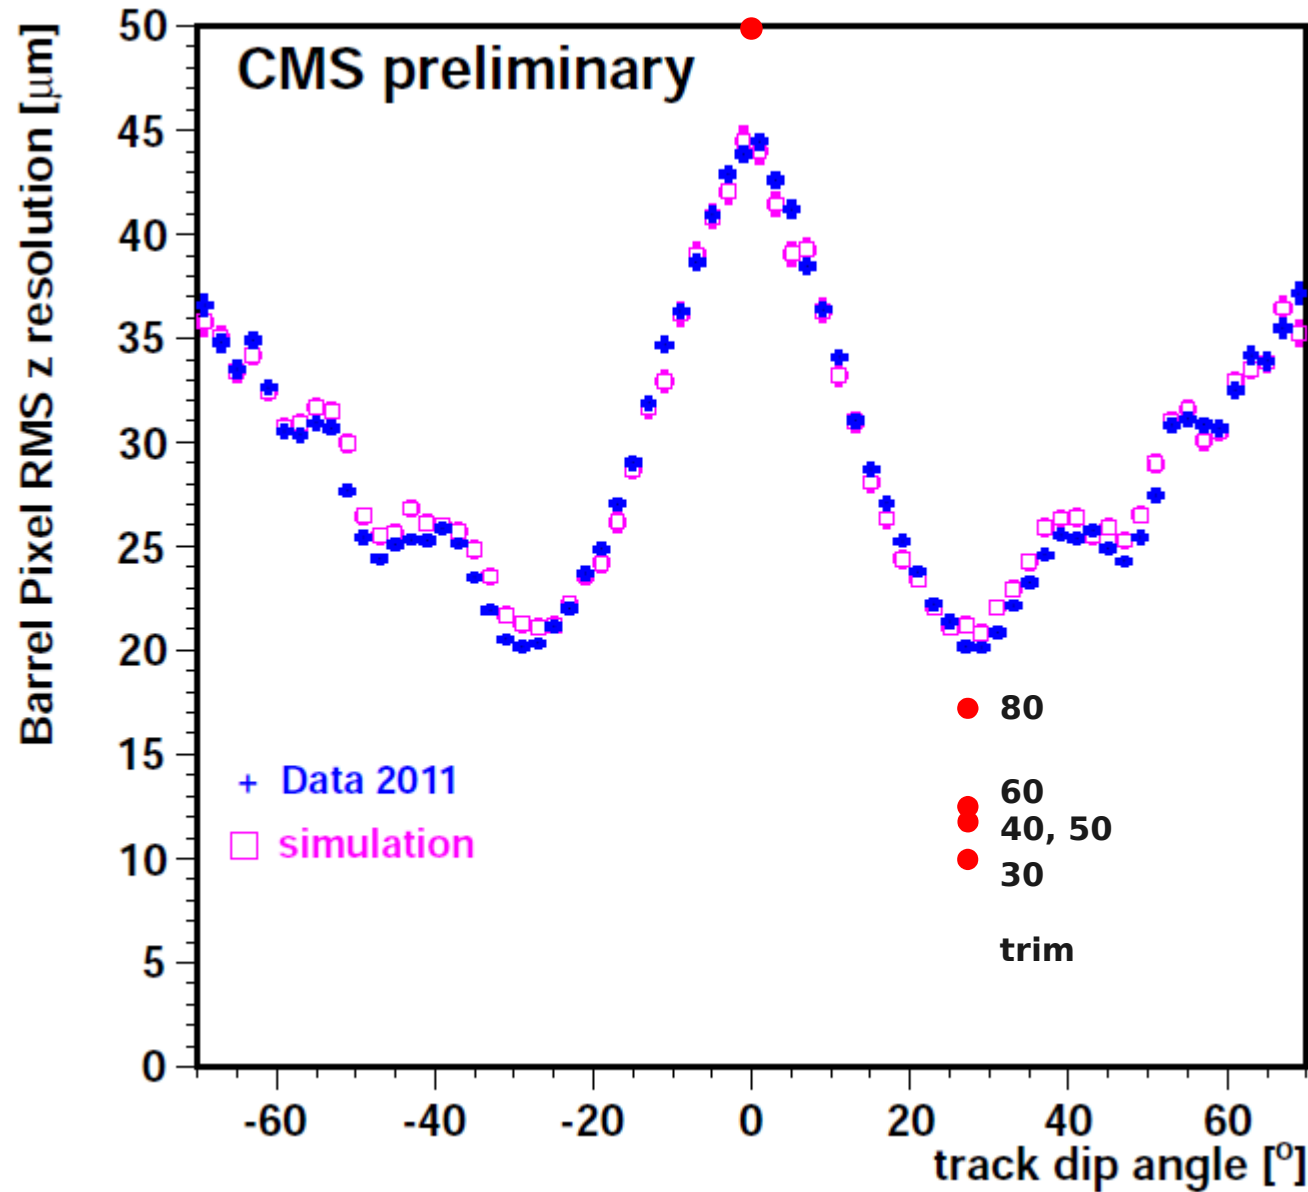

- caveat: truncated RMS vs Student's t fit
- data at 9° , 18° , 36° , 45° to be analyzed...

Summary


- Our test beam setup allows turning in addition to tilting
 - study charge sharing in column direction
 - extended up to 54° turn angle
- Optimal resolution at 27° :
 - 30% improvement by reducing threshold from 4 to 1.5 ke.
- More analysis to follow...

Back up

DESY Testbeam Schedule 2013 - version of December 14 2012


	Week		TB21		TB22		TB24/1		TB24
swapped			DATURA (telescope)	none	Telescope	CAL	Telescope PCMAG	PCMAG	none
		2	---	---	---	---	---	---	---
14-Jan	3		---	ITER	Tele setup				
	4		X0		---	CALICE AHCAL			
	5	swapped	CMS Pix-irrad	---	---	CALICE AHCAL	---	TPC MMG	ECAL
2-Feb	6	order	CMS Pix-fwd	---	ATLASPix	---	---	TPC MMG	---
	7		CLICpix	---	---	SiPM	LorAngle	---	---
	8		---	SiW ECAL	---	SiPM	LorAngle	---	---
	9		---	Sc ECAL	EUTelescope	---	---	DESY TPC	---
4-Mar	10								
	11		ALICE ITS	---	MuPix 2	---	---	DESY TPC	---
	12		CMS Pix-irrad	---	APIX PPS	---	---	DESY TPC	---
	13		CMS Pix-KA	---	APIX PPS	---	---	LCTPC Time	---
1-Apr	14		---	GRPC-SDHCAL	APIX IBL	---	---	LCTPC Time	---
	15		---	GRPC-SDHCAL	APIX DBM	---			
	16		X0		ILCPOL				
	17		---	SiW ECAL	ILCPOL		SBS GEM		
	18		---	SC ECAL	---	RD50	SBS GEM		
6-May	19		DEPFET	---	---	RD50	LorAngle		
	20		FE-I4		---	CAL MMG	---	GridPix	---
	21		CMS Pix-ro		---	CAL MMG	---	---	Belle 2 PID
	22		X0			CALICE AHCAL			
3-Jun	23		CLICpix	---	---	CALICE AHCAL			
	24		CLICpix	---	MuPix 3	CALICE AHCAL			
	25		ALICE ITS	---	APIX 3D		---	---	PICSEL
	26		CMS Trk II	---	DIA-SiGe	---	---	---	PICSEL

changes to EUTelescope code

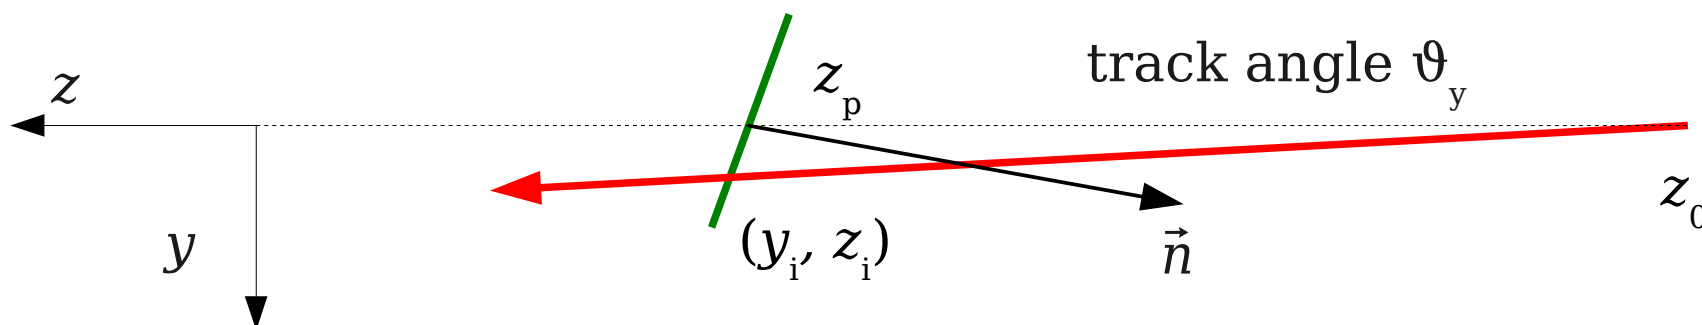

- inclined track:
 - $x = x_0 + (z - z_0) \tan \theta_x$
 - $y = y_0 + (z - z_0) \tan \theta_y$
- sensor plane at z_p defined by normal vector $\vec{n} = (n_x, n_y, n_z)$
- plane equation: $\{ \vec{r} \mid \vec{n} (\vec{r} - \vec{r}_p) = 0 \}$
- insert track equation into plane equation to get intersect:
 - $z_i - z_0 = (n_z(z_p - z_0) - n_y y_0 - n_x x_0) / (n_x t_x + n_y t_y + n_z)$
 - get x_i and y_i by inserting z_i into track equations

Rotations and transformations

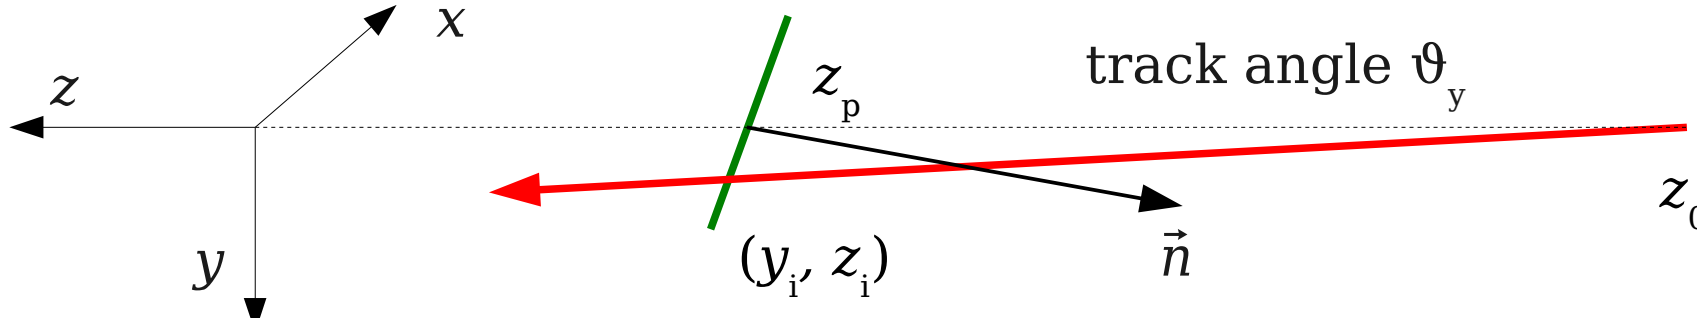

$$\begin{pmatrix} n_x \\ n_y \\ n_z \end{pmatrix} = R_y(\omega) R_x(\alpha) \begin{pmatrix} 0 \\ 0 \\ -1 \end{pmatrix}$$


$$R_y(\omega) = \begin{pmatrix} \cos \omega & 0 & \sin \omega \\ 0 & 1 & 0 \\ -\sin \omega & 0 & \cos \omega \end{pmatrix} \quad R_x(\alpha) = \begin{pmatrix} 1 & 0 & 0 \\ 0 & \cos \alpha & -\sin \alpha \\ 0 & \sin \alpha & \cos \alpha \end{pmatrix}$$

Transform intersect point into sensor coordinates:

$$\begin{pmatrix} x' \\ y' \\ z' \end{pmatrix} = R_z(\phi) R_x(-\alpha) R_x(-\omega) \begin{pmatrix} x_i \\ y_i \\ z_i \end{pmatrix} + \begin{pmatrix} a_x \\ a_y \\ 0 \end{pmatrix} \quad \text{where } z' = 0$$

with alignment parameters $\phi, \alpha, \omega, a_x, a_y$.


Landau distribution chip 47

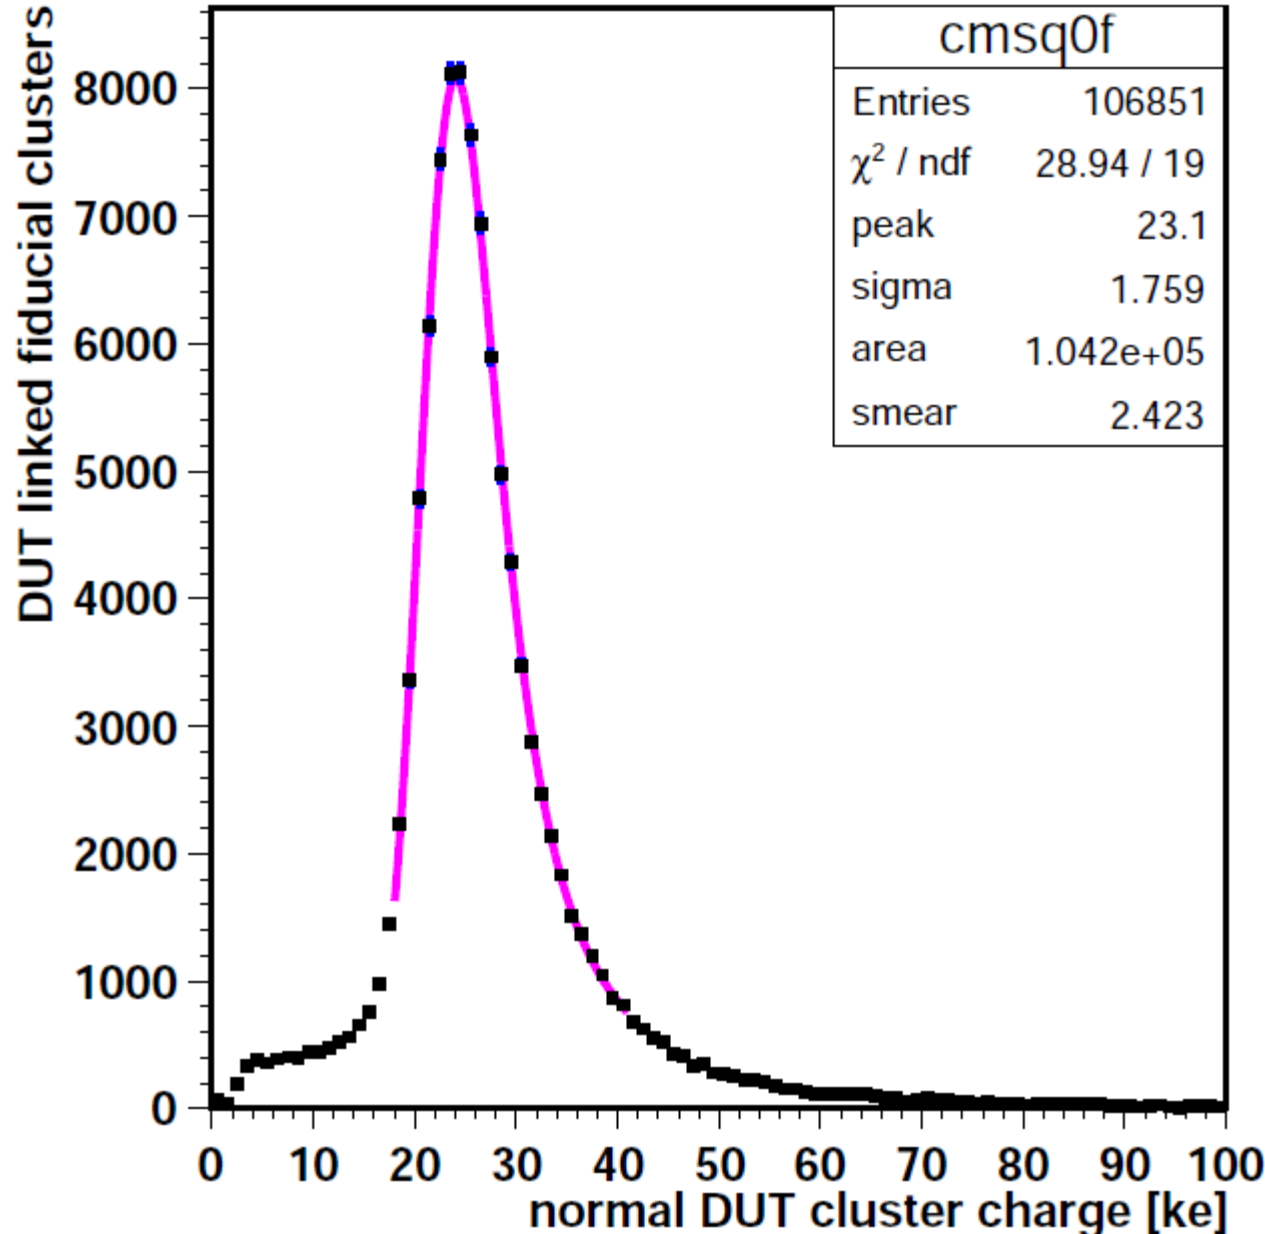


- digital chip 47
- Telescope run 5559:
 - bias -150V
 - turn 26°, tilt 19°
 - normalized to vertical incidence
- Gain calibration: Weibull fit, nominal gain 50e/DAC used.
- Cluster charge distribution fit by Landau \otimes Gauss
 - peak at 23.1 ke a little low.

column resolution vs cluster charge

dig chip39, trim 24, run 5559, 4.4 GeV, 26° turn

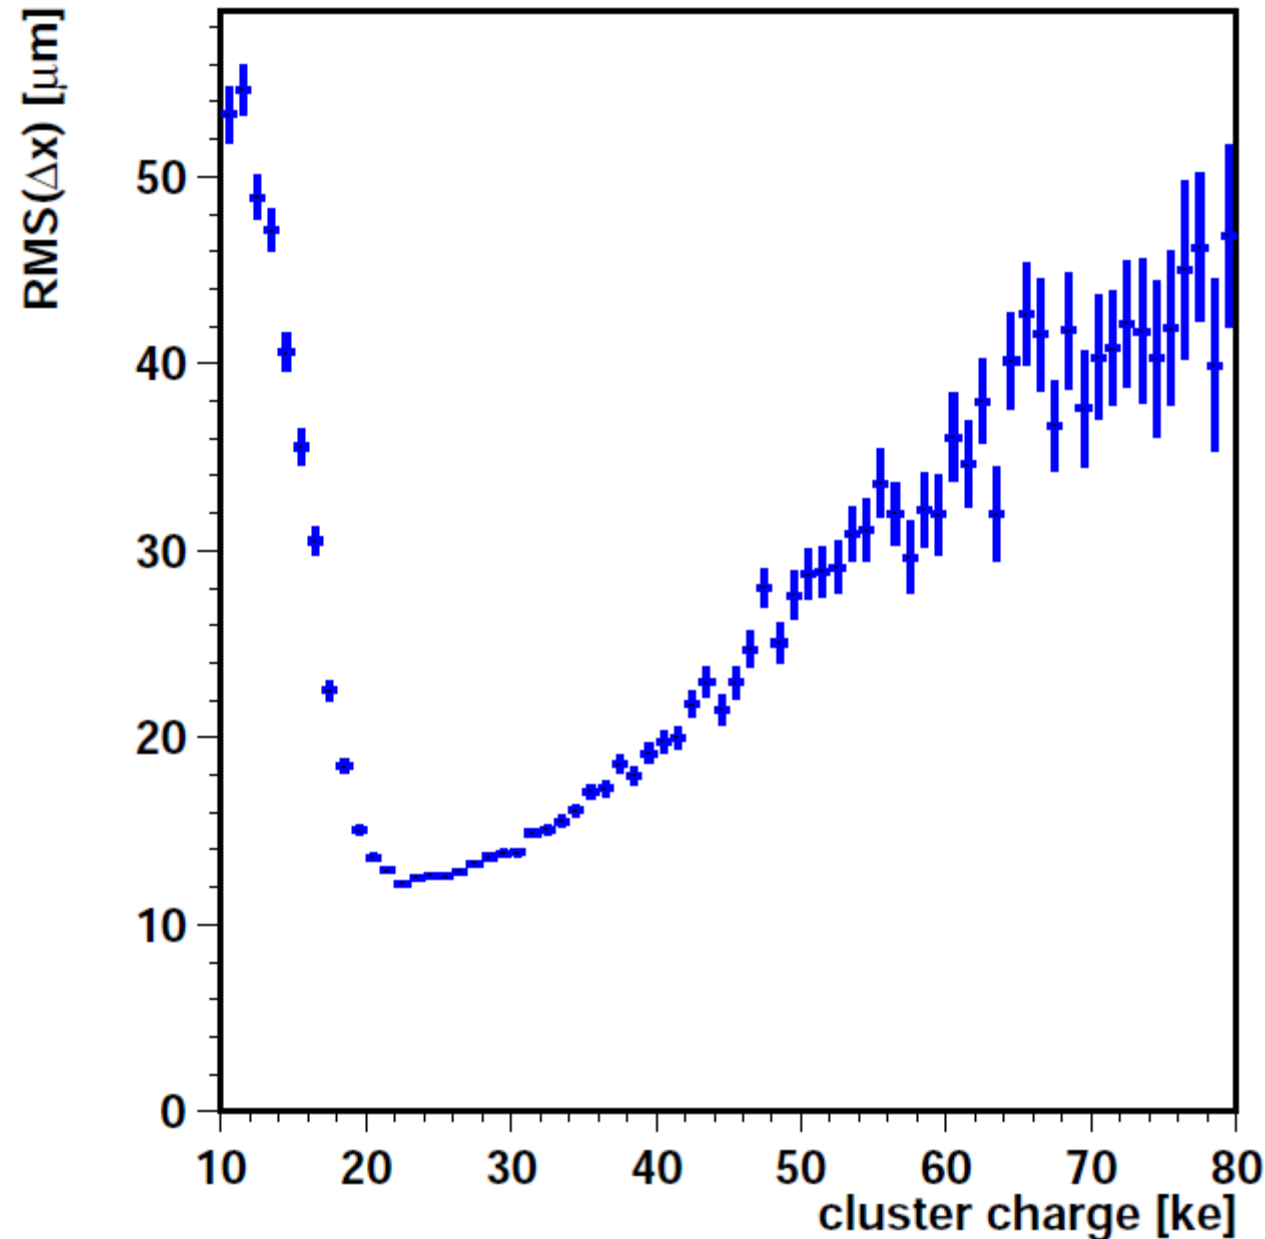



top view:

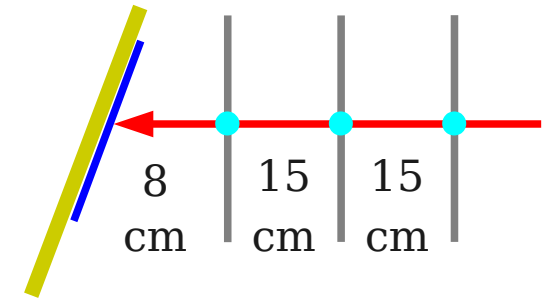

- Best resolution for mips at the Landau peak around 24 ke
- Poor resolution below 18 ke:
 - broken clusters
- Poor resolution in Landau tail above 40 ke:
 - delta rays

column resolution at vertical incidence

dig chip47, trim 24, run 5474, 4 GeV, 0° turn

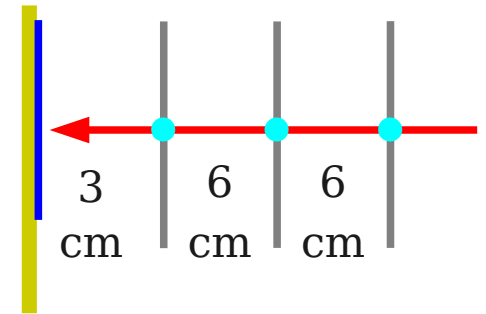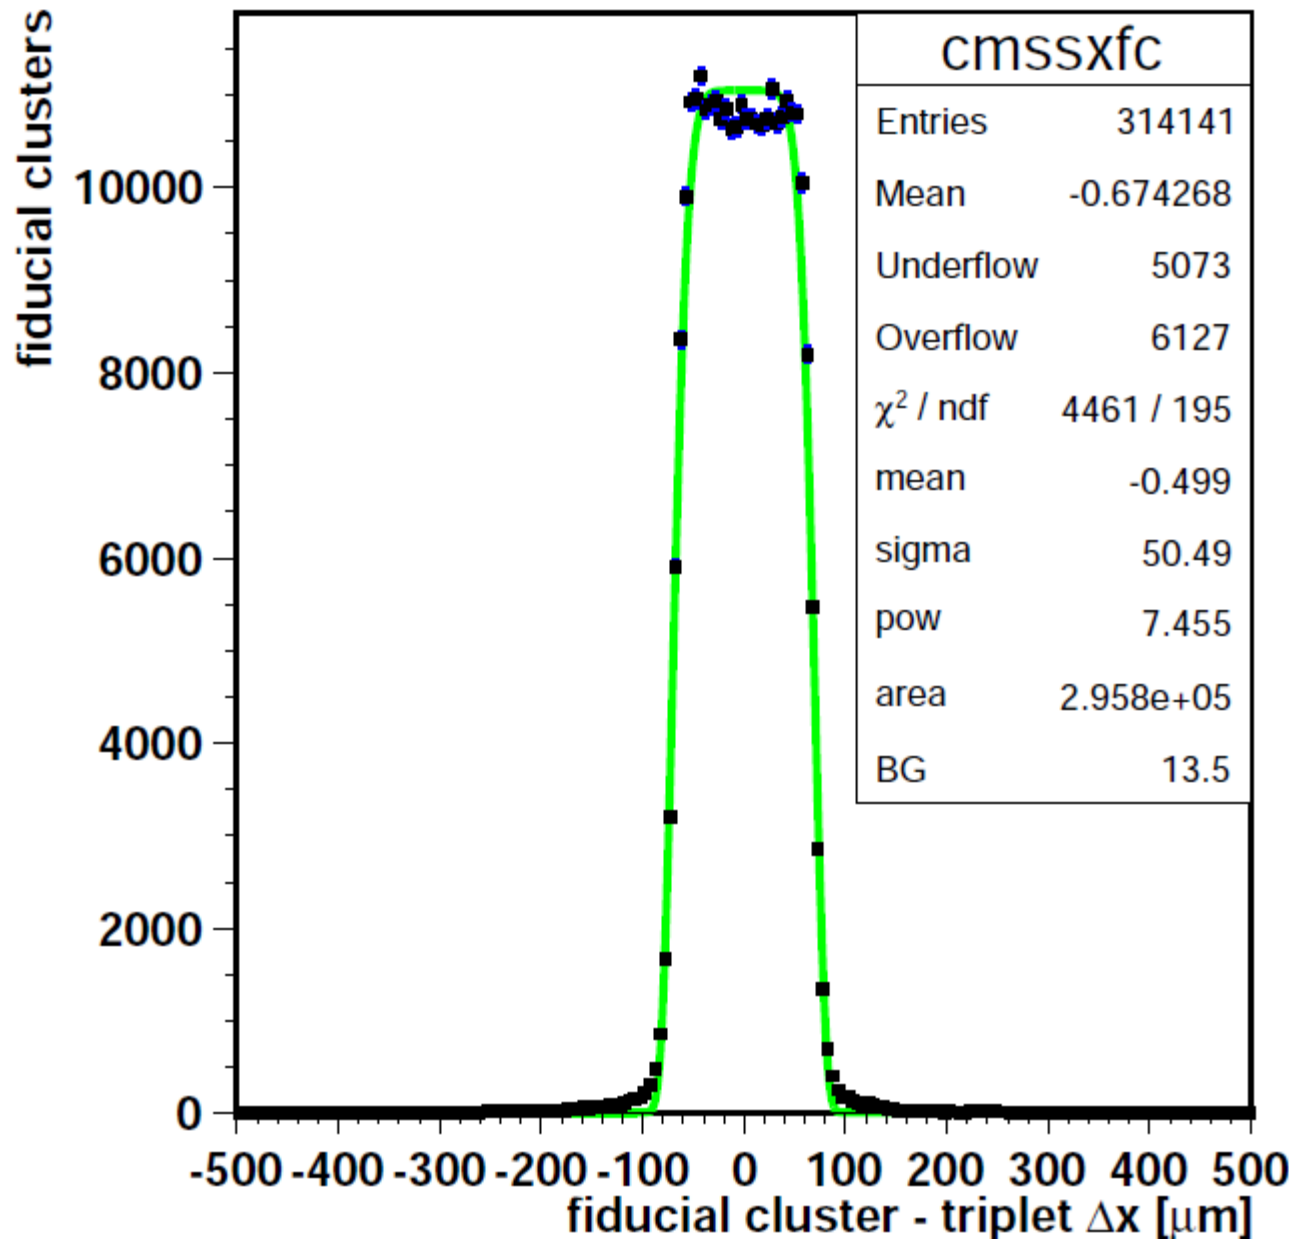

- Horizontal = columns
 - pixel width 150 μm
- Vertical incidence:
 - no charge sharing
 - residuals have box distribution
- Fit with generalized error function
 - Residual: 50 μm ,